


# LED WALL LIGHT

## 嵌墙灯

LWL-BF3/4/5 系列



LWL-BF5



LWL-BF3




LWL-BF4

### Features 产品特点


- \* 采用贴片式3020SMD光源,具有发光效率高,显色指数高,光衰小,聚光等特点
- \* 高导热性铝合金灯体,压铸铝面盖,散热良好,强度高,IP65防护等级;发光有方向性,减少光污染
- \* 启动速度1-3秒,无频闪,抗干扰,不含汞等有害物质,节能环保的绿色灯具

- \* Adopting 3020SMD with strong points of high luminous efficiency, high CRI and low light decay ect.
- \* High thermal conductive die-casting aluminum housing and cover with better heat radiation, high strength and IP65 protection class. Directional light emission reduces light pollution;
- \* 1-3 seconds to power on without any shaking, it is anti-interference, non-containing harmful substances such as mercury, energy-saving and environmental pro


### 物理 & 安装尺寸 Physical & Installation Dimensions

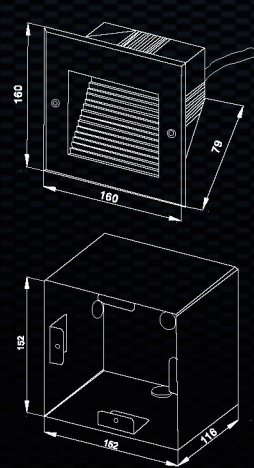

LWL-BF3  
预埋件 / Embedded Part 单位/Unit : mm

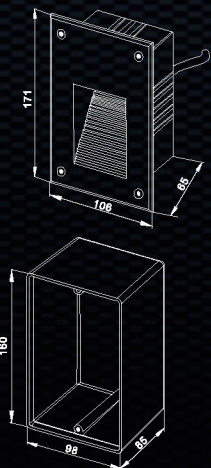

LWL-BF4  
预埋件 / Embedded Part 单位/Unit : mm

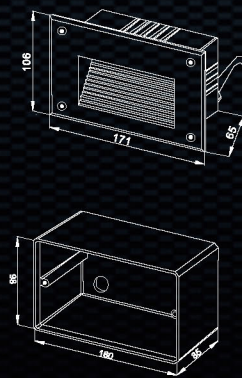


LWL-BF5  
预埋件 / Embedded Part 单位/Unit : mm

CE IP65 CREE


### 标配型号 & 技术参数 Model Info & Specifications

型号/Model	LWL-BF3	LWL-BF4	LWL-BF5
尺寸 /Size	L160xW160xH79mm	L171xW106xH65mm	L106xW171xH65mm
材质 /Main body	压铸铝合金/Die casting aluminum alloy	压铸铝合金/Die casting aluminum alloy	压铸铝合金/Die casting aluminum alloy
重量 /Weight	2.0kgs±5%	0.9kgs±5%	0.9kgs±5%
灯珠数 /LED Quantity	18 pcs SMD/2835	18 pcs SMD/2835	18 pcs SMD/2835
灯珠颜色 /Color	暖白,中性白,白光/WW,NW,W	暖白,中性白,白光/WW,NW,W	暖白,中性白,白光/WW,NW,W
输入电压 /Input Volt	100V/240V AC	100V/240V AC	100V/240V AC
最大功率 /Power(Max.)	3.6W	3.6W	3.6W
发光角度 /Light Angle	120°	120°	120°


### 应用场所 Project application

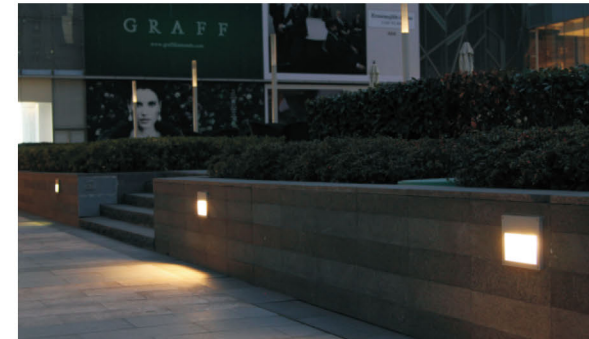

### 照度图 Illuminance At A Distance

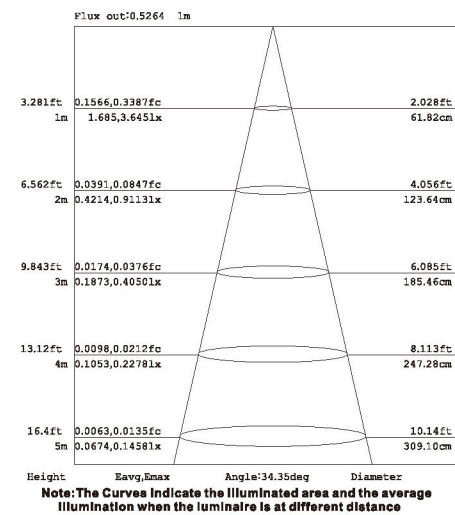

### 光强分布曲线 Distribution Curve

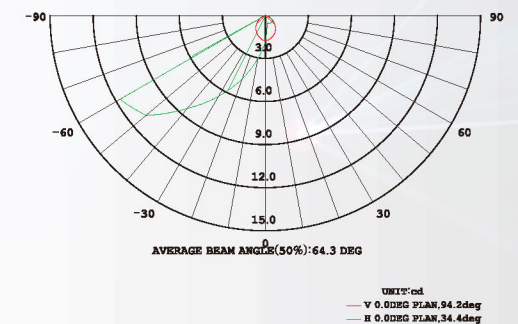

LWL-BF3 Beam Angle: 120°