

LED PANEL

NEW! LED Backlit Panel



Features

- Efficiency up to 100lm/W
- Multiple installation style: Lay-in/Recessed/Pendant/Surface*
- Up to 30000 HR lifetime


No.	Item code	Power (W)	Power Factor	CRI (%)	Lumen (lm)	Efficacy (lm/W)	Dimension (mm)	Cut-out (mm)	CCT (K)
P6-1	LED-PanelRc-BL Sq595-36W-HF-WH	36	0.90	>80	3600	100	L595 x W595 x H46.5	585 x 585	4000/6000
P6-2	LED-PanelRc-BL Re295-36W-HF-WH	36	0.90	>80	3600	100	L1195 x W295 x H46.5	1185 x 285	4000/6000
P6-3	LED-PanelRc-BL Sq595-48W-HF-WH	48	0.90	>80	4800	100	L595 x W595 x H46.5	1185 x 285	4000/6000
P6-4	LED-PanelRc-BL Re295-48W-HF-WH	48	0.90	>80	4800	100	L1195 x W295 x H46.5	1185 x 285	4000/6000

Accessory: Surface Mount Casing, Suspension and Recessed

No.	Item code	Dimension (mm)
P6-5	OPL SPL SM EII SQ595 (Surface Casing for SQ595)	600 x 600 x H65
P6-6	OPL-LED-SPANEL-EII-Suspension Steel Cable (4pcs/set)	





No.	Item code
PA3	OPL S PANELRC BL CLIPS (4pcs/set)
PA4	OPL S PANELRC EII CLIPS (4pcs/set)



ECOMAX-III LED Panel




Accessory:
Slim Panel SQ598
EcoMaxIII Clip

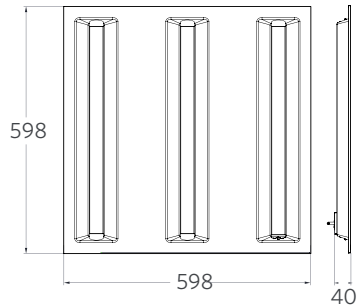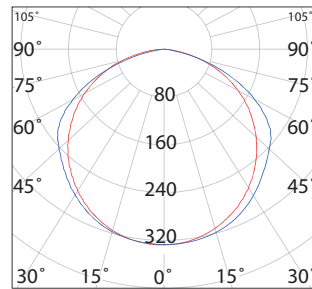

No.	Item code	Power (W)	Dimension (mm)	CRI (%)	Lumen (lm)	Input Current (mA)	CCT (K)
P6-7	LED-S-PanelRC-EIII-SQ598-37W	37	L598 x W598 x H40	>80	3300	170	4000/5700

Panel Grille - Low Glare UGR<16

A high efficient panel with perfect glare control for high-end office application. UGR<16. Modular light structure

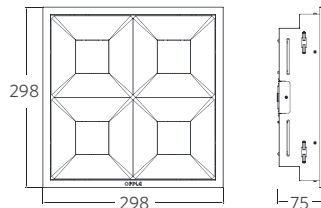

No.	Item code	Power (W)	Dimension (mm)	CRI (%)	Lumen (lm)	Input Current (mA)	CCT (K)
P6-8	LED-PanelRC-SQ298-11W	11	L298 x W298 x H75	>80	1100	60	4000