


HEAVY DUTY LED FLOODLIGHT



FL 80 SERIES



Key Features

- High efficient constant current AC driver to enhance reliability for AC series
- Vibration-resistant
- Long service life of >50,000 hours L70 @ 45°C (Ta)
- Safety, EMC and IEC compliance

Application

Decks, Marinas, Docks




Material

Marine grade aluminium alloy with powder coating, comes with 4mm tempered glass front cover and high-efficiency optical lens

Weight

FL85NAD/FL85FAD: 7.5Kg

FL80ND/FL80FD: 7.0Kg

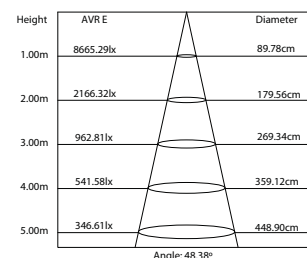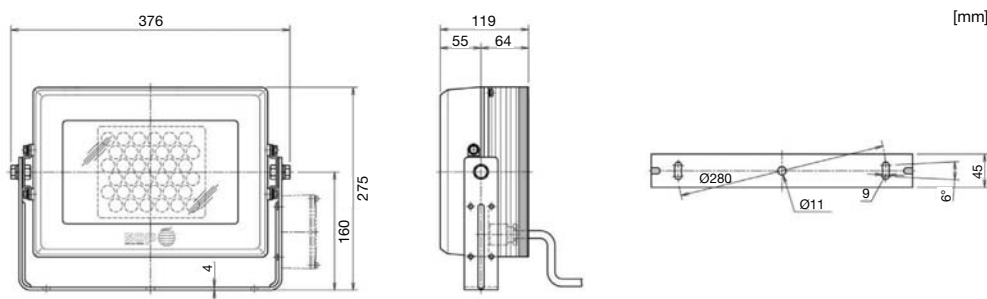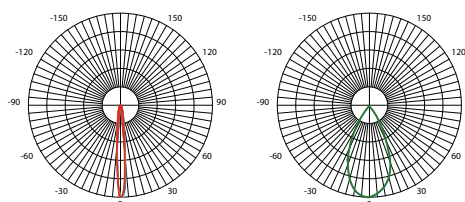

TECHNICAL SPECIFICATIONS IP 66

Ideal Replacement:



BH Code	Type	Main Voltage	Power	CCT	Beam Angle	Ambient Temp (Ta)	System Lumen
LAFL85NAD	FL85NAD	100V - 240V AC/DC	85W	5700K	10°	-20°C ~ +45°C	7550lm
LAFL85FAD	FL85FAD	100V - 240V AC/DC	85W	5700K	50°	-20°C ~ +45°C	7550lm
LAFL80ND	FL80ND	24V DC	80W	5700K	10°	-20°C ~ +45°C	7550lm
LAFL80FD	FL80FD	24V DC	80W	5700K	50°	-20°C ~ +45°C	7550lm

Also available in other CCT.