

LED SPOT LIGHT

投光灯
SP-F170A系列

SP-F170A-16P




SP-F170A-36P



Features 产品特点

- *采用国际标准DMX512信号控制 *International standard DMX512 control ;
- *结构性防水(IP65) *Tight waterproof structure;(IP65)
- *可旋转设计调节角度(180°max) *Rotating design for adjusting any angles(180°max);
- *透镜选择多样化 *Optional on optic lens ;

物理 & 安装尺寸 Physical & Installation Dimensions

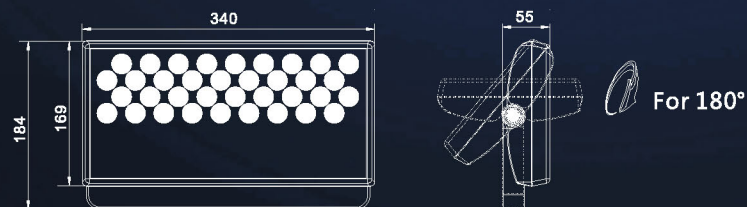

CE IP65 EPISTAR CREE


标配型号 & 技术参数 Model Info & Specifications

型号/Model	SP-F170A-36P	SP-F170A-16P
尺寸 /Size	L340xW55xH184mm	L340xW55xH184mm
材质 /Main body	压铸铝-ADC12 /Die cast Al.-ADC12	压铸铝-ADC12 /Die cast Al.-ADC12
重量 /Weight	4.3kgs±5%	4.3kgs±5%
灯珠数 /LED Quantity	36x1.5W	16x2.5W
灯珠颜色 /Color	RGB全彩或单色 /RGB or Steady Color	RGBW(4in1)
输入电压 /Input Volt	100V-240V AC	100V-240V AC
最大功率 /Power(Max.)	60W	45W
透镜角度 /LENS	15°/30°/45°/20°*60°	15°/30°/40°/15°*35°
控制方式 /Control Mode	常亮或DMX /Steady or DMX	DMX


应用场所 Project application



照度图 Illuminance At A Distance

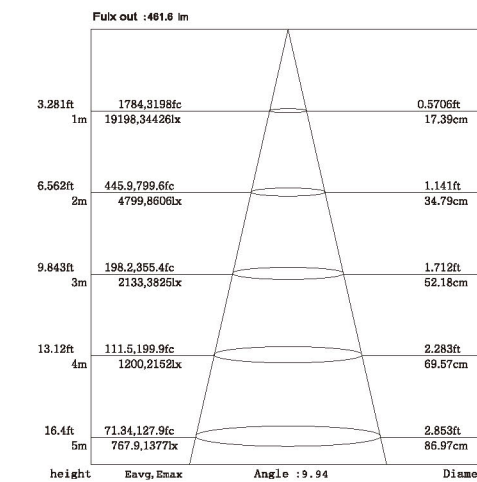

光强分布曲线 Distribution Curve

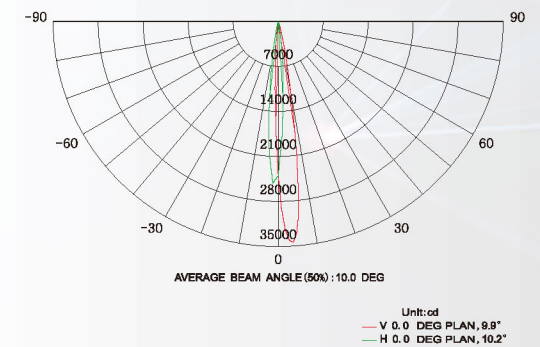

SP-F170A-36P Beam Angle: 15°