

LED Spot Light

- Classic MR16 bulb design with simple Nordic style
- High luminous performance at GU10 base, up to 8W
- Bulbs available for different power and wide applicability




720lm
8W

LED 8W To replace Halogen 55W

IEC IEC60598 CE LVD RÖHS COMPLIANT ErP EMAC Updated to EN/IEC 61000-3-2:2019

Spot Series - Standard

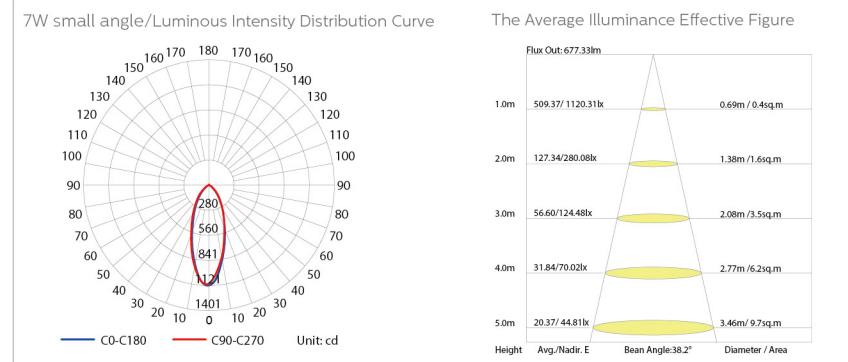


Item Number	Watts(W)	Voltage(V)	P.F.	Luminous Flux(lm)
GU/CL/0/1/0/LNS	4W	100-240/220-240	>0.4	360lm
GU/CL/0/1/0/LNS	5W	100-240/220-240	>0.5	450lm
GU/CL/0/1/0/LNS	6W	100-240/220-240	>0.5	540lm
GU/CL/0/1/0/LNS	7W	100-240/220-240	>0.5	630lm
GU/CL/0/1/0/LNS	8W	100-240/220-240	>0.5	720lm

Dimension: (Φ)50mmx55mm

Item Number	Watts(W)	Voltage(V)	P.F.	Luminous Flux(lm)
MRM/CL/0/1/0/LNS	4W	100-240/220-240	>0.4	360lm
MRM/CL/0/1/0/LNS	5W	100-240/220-240	>0.5	450lm
MRM/CL/0/1/0/LNS	6W	100-240/220-240	>0.5	540lm
MRM/CL/0/1/0/LNS	7W	100-240/220-240	>0.5	630lm

*Not available for CE Market
Dimension: (Φ)50mmx50mm

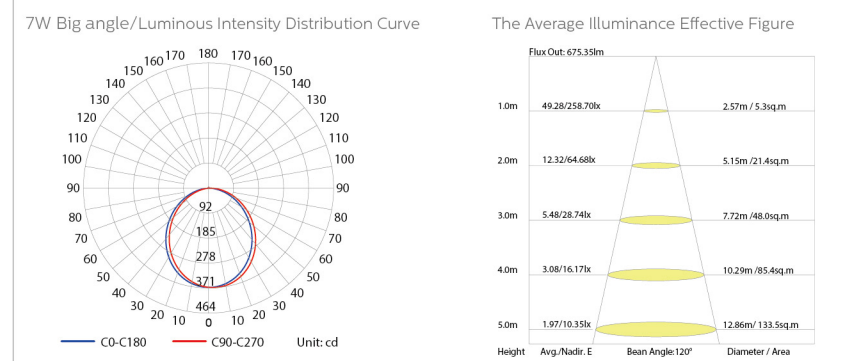

Item Number	Watts(W)	Voltage(V)	P.F.	Luminous Flux(lm)
GU/CL/0/1/0	4W	100-240/220-240	>0.4	360lm
GU/CL/0/1/0	5W	100-240/220-240	>0.5	450lm
GU/CL/0/1/0	6W	100-240/220-240	>0.5	540lm
GU/CL/0/1/0	7W	100-240/220-240	>0.5	630lm
GU/CL/0/1/0	8W	100-240/220-240	>0.5	720lm

Dimension: (Φ)50mmx59mm

Item Number	Watts(W)	Voltage(V)	P.F.	Luminous Flux(lm)
MRM/CL/0/1/0	4W	100-240/220-240	>0.4	360lm
MRM/CL/0/1/0	5W	100-240/220-240	>0.5	450lm
MRM/CL/0/1/0	6W	100-240/220-240	>0.5	540lm
MRM/CL/0/1/0	7W	100-240/220-240	>0.5	630lm

*Not available for CE Market
Dimension: (Φ)50mmx55mm

Spot Series - TRIAC Dimming

Item Number	Watts(W)	Voltage(V)	P.F.	Luminous Flux(lm)
GU/CL/DIM/1/TB	5W	100-240/220-240	>0.7	400lm
GU/CL/DIM/1/TB	6.5W	100-240/220-240	>0.7	520lm

Dimension: (Φ)50mmx55mm