



High Brightness 140lm/w



Flicker free driver
No strobe



IP65 for harsh conditions

High
CRI

CRI>80/90



Pure aluminum shell
Good heat dissipation



50,000 hours long life

Applications


- Corridors / hallways
- Storage areas
- Stairways
- Parking lots
- Gas stations
- Car wash / auto body operations
- Other applications subject to harsh, wet, or otherwise challenging conditions

Specifications (Single Design)

Model No.	T552-36W12	T552-50W12	T552-50W15
Product Dimension	1218*54*64(mm)	1218*54*64(mm)	1518*54*64(mm)
Efficiency	140±10lm/W		
Luminous Flux (±10%)	5000±360lm	7000±500lm	7000±500lm
LED Quantity	128 PCS SMD 2835	128 PCS SMD 2835	160 PCS SMD 2835
CCT	3000K;4000K;5000K;6000K		
Ingress Protection	IP65		
Color Rendering Index	Ra>80		
Beam Angle	120°		
Driver Brand	TOMCARLINE		
Input Voltage	AC220-240V		
Power Factor	>0.9		
Frequency	47-63HZ		
Driver Type	Constant Current (CC)		
Luminaire Net Weight	1.3kg	1.3kg	1.7kg
Packing Information	10PCS/CTN	10PCS/CTN	6PCS/CTN
Export Carton Size	133*36*16(cm)	133*36*16(cm)	163*23*16(cm)
Gross Weight	16kg	16kg	12.8kg
Material	Housing	Aluminum Alloy+ PC	
	Optics	PC Cover	
Fixture Color	White		
Mounting Option	Ceiling mounting		
Ambient Temperature	-30~+45℃		
Life Time	50.000 hours		
Warranty	3 Years		
Optional Accessories	Suspending ropes		
	CRI >90		

Photometry

120°

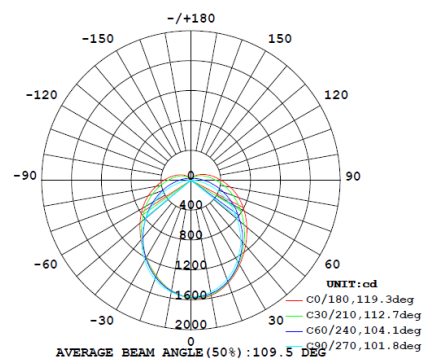

Dimensions

