



UF5 100W



UF5 150W



UF5 200W

LUMINAIRE SPECIFICATIONS

- Power 100W
150W
200W
- Fitting Material Non-Corrosive Die-Cast Aluminium
- Fitting Color Black
- Fitting Optic Polycarbonate Optical Lens
- Ingress Protection IP65
- Voltage 220 ~ 240 Vac 50 / 60Hz
- Electrical Safety Class Class I
- Operating Temperature -30 ~ +50°C
- Installation Loop Mounting
- Beam Angle 90D (200W)
120D (100W & 150W)

LED MODULE SPECIFICATIONS

- Color Temperature 5700K
- Color Rendering Index (CRI) Ra >70
- L70 100,000 Hrs @ 25°C

COMPLIANCE STANDARD

- LED LM80

APPLICATION

- Warehouse, Supermarket, Exhibition Center, Gym Room, Shopping Mall, Library

OPTIONAL FEATURES (UPON REQUEST)

- Sensor Motion (Plug & Play)
Mounting Height up to 15m with Ø14m detection range with a Remote Control
- Diffuser PC Diffuser
Aluminium Diffuser

MEASUREMENT & ORDER CODE


| WATTAGE | ORDER CODE | TYPICAL LUMINOUS FLUX | TYPICAL WATTAGE | QTY / CARTON | NETT WEIGHT (PER UNIT) | CARTON DIMENSION (L x W x H) mm |
|---------|------------|-----------------------|-----------------|--------------|------------------------|---------------------------------|
| 100W | UF5 100W | 14457lm | 100W | 2pcs/ctn | 1.5 kg | 245 x 245 x 180 |
| 150W | UF5 150W | 22618lm | 150W | 2pcs/ctn | 1.7 kg | 260 x 260 x 190 |
| 200W | UF5 200W | 29042lm | 200W | 2pcs/ctn | 2.2 kg | 290 x 290 x 195 |

* All result tested base on 5700K CCT LEDs.




DIMENSION


UF5 100W



UF5 200W

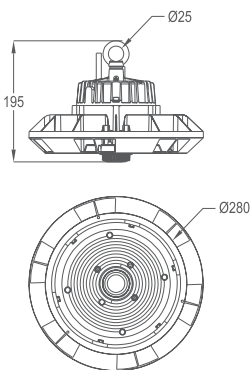


UF5 150W

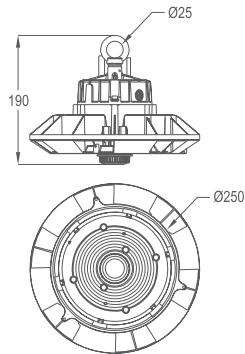


PHOTOMETRIC


UF5 100W



UF5 150W



UF5 200W



OPTIONAL FEATURES (UPON REQUEST)

Motion Sensor



PC Diffuser
*Comes with PC Visor



Aluminium Diffuser



Note: Do not use the motion sensor with Aluminium diffuser

Note: All specifications are subject to change without prior notice for product improvement. Images, pictures, and illustrations used are for illustrative purposes only and the color printed may differ from the actual product.