

**UWP240-1M24V (107201220101)**

**Product Feature**

- Wide input voltage with active PFC,full loading output
- Ultra-thin design,save install space
- Adapt to the harsh working environment
- Isolated design, safe and reliable
- Protections: overload, over temperature short circuit, lightning protection etc.
- Conformed with CE/CB/CCC/SELV certification.
- The typical efficiency up to 93.5%
- Protect level IP67
- Warranty 5 Years




**Application**



**Technical Parameters**

Model	UWP240-1M24V	
Input	Efficiency	93.5%@230VAC, Full load
	Voltage	100VAC-240VAC
	Frequency	47-63Hz
	Power Factor	>0.95
	THD	<10%230VAC, Full load
	Current	3.2Amax@230VAC
	Inrush Current	Cold start <50A @230VAC(full load)
Output	Current/Voltage/Power	10A/24VDC/240W
	Ripple Current	<240mVp-p
	Channel	1
	Voltage Tolerance	±5%
Protection	Short Circuit	Auto recovery when failure is removed
	Over Voltage	<28VDC Shut down the output, After restart recovers automatically
	Over Current	<13A auto recovery when failure is removed
Safety & EMC	Surge	L-N:2kV,L,N-FG:4kV
	Withstand Voltage	I/P-O/P:3000VAC/5mA I/P-FG:1500VAC/5mA O/P-FG:500VAC/5mA
	Safety Standards	IEC/EN61347-1,IEC/EN61347-2-13,GB19510.1,GB19510.14
	EMC Eission	EN50515,EN61000-3-2 Class C,IEC61000-3-3
	EMC Immunity	EN61000-4-2,3,4,5,6,8,11 EN61547,GB17625.1
Others	Working Temp.	-25°C~+50°C
	Storage Temp.; Humidity	-40°C~85°C, 20-90%RH
	Tc	90°C
	Material	Metal
	IP Rating	IP67
	Lifetime	50,000h@tc:90°C
	Warranty Condition	5 years
	Switch Cycle	>25,000 times
	Packing Size	Net weight: 1055g±5%/PCS; 20PCS/Carton; 26.1kg±5%/Carton; Carton Size: 355*290*180mm(L*W*H)
	Dimension	270*68*30mm(L*W*H)


**Dimension(mm)**

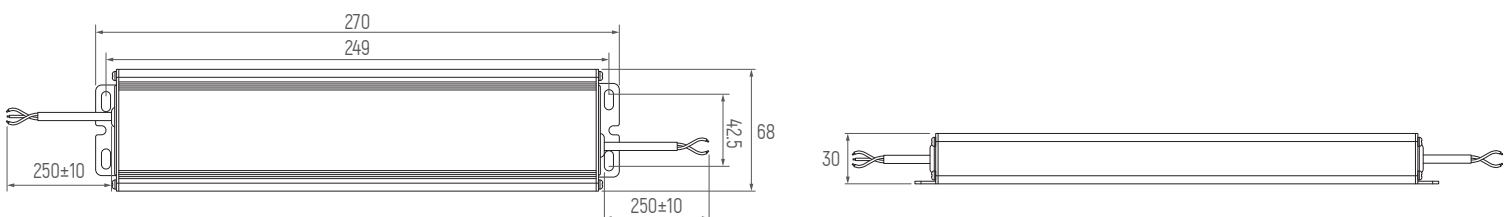

**Wiring Diagram**




**Derating Curve**



**Cautions**

- 1 This product should cut off the input voltage and installed by a professional.
- 2 Make sure that the output voltage and current of the power supply must meet the specifications of the lamp before installation.
- 3 It is waterproof IP67,do not soak in water for a long time when using.
- 4 The driver should be installed in a well space and environment.
- 5 The sectional area of the conductor wire which connect to the driver and lamp should be enough (Recommended less than 4A/mm<sup>2</sup>).
- 6 Make sure all connections are correct and secure before powering up.
- 7 If break down during use,it must be repaired by a professional or contact the supplier.

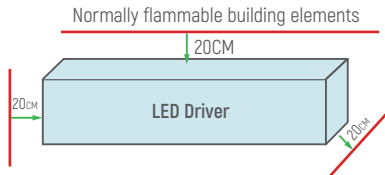

The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.

※ The contents of this manual are updated without prior notice. If the function of the product you are using is inconsistent with the instructions, the function of the product shall prevail. Please contact us if you have any questions.

UWP240-1M24V (107201220101)

产品特点

- 宽电压输入，足功率输出
- 超薄设计，节约安装空间
- 适应严酷的工作环境
- 采用隔离式设计，安全可靠
- 具有防雷、过载、短路、过温等保护功能
- 符合CE/CB/CCC/SELV认证
- 整机典型效率高达93.5%
- 防护等级达IP67
- 质保期5年




应用



技术参数

型号	UWP240-1M24V	
输入	效率	93.5%@230VAC, 满载
	电压	100VAC-240VAC
	频率	47-63Hz
	功率因数	>0.95
	THD	<10%@230VAC, 满载
	电流	3.2Amax@230VAC
	浪涌电流	冷启动 <50A @230VAC(满载)
输出	电流/电压/功率	10A/24VDC/240W
	波纹电流	<240mVp-p
	通道	1
	电压公差	±5%
保护	短路	故障排除后自动恢复
	过压	<28VDC 关闭输出，重启后恢复
	过流	<13A故障排除自动恢复
安规与电磁兼容	浪涌	L-N:2kV,L,N-FG:4kV
	耐压	I/P-O/P:3000VAC/5mA I/P-FG:1500VAC/5mA O/P-FG:500VAC/5mA
	安全标准	IEC/EN61347-1,IEC/EN61347-2-13,GB19510.1,GB19510.14
	电磁兼容	EN50515,EN61000-3-2 Class C,IEC61000-3-3
	EMC抗扰度	EN61000-4-2,3,4,5,6,8,11 EN61547,GB17625.1
其它	工作温度	-25°C--+50°C
	储存温度、湿度	-40°C-85°C, 20-90%RH
	Tc	90°C
	材质	金属
	防水等级	IP67
	寿命	50,000h@tc:90°C
	质保	5年
	开关周期	>25,000次
	包装重量	净重: 1055g±5%/个; 20个/箱; 26.1kg±5%/箱; 外箱尺寸: 355*290*180mm(长*宽*高)
	产品尺寸	270*68*30mm(长*宽*高)


产品尺寸(mm)

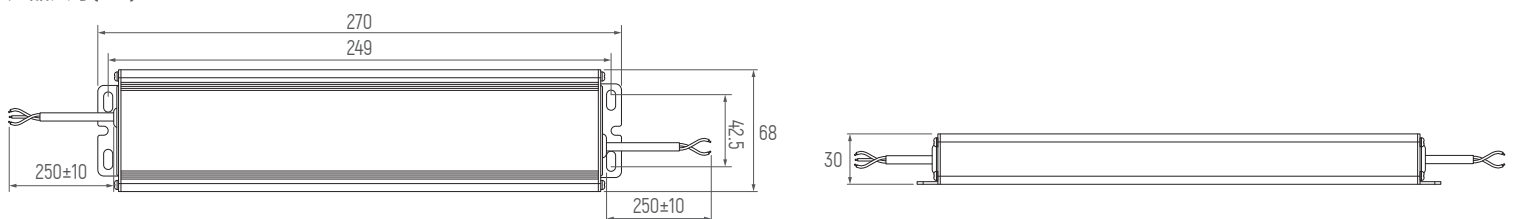

**应用接线图**



**降额曲线**



**注意事项**

1. 本电源应切断输入电压并由专业人员进行安装调试
2. 安全前须确认电源输出的电压电流符合灯具的规格要求
3. 本电源防水等级为IP67，不可浸泡在水中工作
4. 电源应安装在良好散热的空间与环境
5. 用于连接电源及灯具的导线面积应足够(建议小于4A/MM<sup>2</sup>)
6. 通电前，须确认所有连接正确且牢固
7. 使用过程中如发生故障，须由专业人员维修或联络供应商



此灯具的外部软电缆或软线不能更换；如果软线是灯具损坏，应予以销毁；

※ 本说明书内容如有更新，恕不另行通知。若您使用的产品功能与说明书不一致时，请以产品为准。如有疑问请与我们联系。