

AEROLITE

TÜV IP 65
RoHS CE



SEVERAL METHODS OF INSTALLATION



Direct Ceiling



Conduit Rod



Threaded Rod



Suspension Wire

APPLICATIONS

A well-designed and compact range of weatherproof LED fixtures suitable for many indoor and outdoor applications such as supermarkets, multi-storey car parks, passageways, underpasses, staircases, warehouses, foyers and many others.

These Led fixtures can be easily plugged and joined 'end-to-end' for continuous mounting of up to 400w by means of strong straight joints with only a small 25mm gap between fixture to fixture. A short 125mm 'on/off' microwave sensor is available (upon request) to plug to the end of the fixture and the on/off sensor will automatically turn 'Off' the fixture when no motion is detected.

A short 125mm 'dim-down' microwave sensor is also available (upon request) to plug the end of a 'dim-down' version of this fixture so that the brightness will automatically 'dim-down' to 30% when no motion is detected.

CONSTRUCTION

The main housing is constructed of strong anodised aluminium extrusion to house the high-quality 'sanan' led lamps and built-in driver. The led lamps are available in warm white (3000k) or cool white (4000k) or daylight (6000k) colour.

The well-designed smooth opal diffuser and end-caps are constructed with strong injection-moulded vandal-resistant UV-stabilised polycarbonate material.

Several types of stainless steel mounting clips are available to suit many types of installations as illustrated in the pictures above.

Specifications are subject to changes without prior notice.

OPTIONAL




With 'Plug-on' ON/OFF microwave sensor



With 'Plug-on' dim-down microwave sensor

PHOTOMETRIC DATA

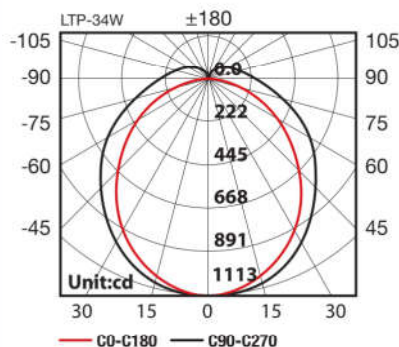

ACCESSORIES



Available upon request

- Special brackets to mount up to 6 fixtures in parallel
- Single or double-sided metal reflectors

ORDERING DATA

MODEL	WATTAGE	LUMENS	NOMINAL LENGTH (mm)
LTP-600-18W	18W	1820 Lm	600
LTP-900-24W	24W	2430 Lm	900
LTP-1200-34W	34W	3540 Lm	1200
LTP-1500-40W	40W	4080 Lm	1500