

# ADAM-Lite

## APPLICATIONS

A very wide range of slim and attractive battens with various optical attachments for use in many applications such as car parks, warehouses, corridors, production floors, kitchens, staircases, canteens, supermarkets, hospitals, schools and back-of-house areas.

Suitable for both suspended mounting with rods or direct mounting on ceilings and walls.

## CONSTRUCTION

The housing and gear cover are manufactured with high grade steel sheet, chemically treated and finished with superb quality epoxy-powder coating.

The lampholders are manufactured with UV-stabilised polycarbonate for strength and durability.


The Adam-Lite batten is prewired with heat-resistant wires and supplied in switch-start circuitry as standard. Low loss ballasts and electronic ballasts are also available upon request.

Also available with 14.5W (1200mm) or 8W (600mm) T8 **LED** Tubes.

## ORDERING DATA

Wattage	Basic Type	With Wire-Guard	With Prismatic Diffuser	With Mirror Reflector	With Half-Mirror Reflector	With Metal Reflector	Nominal Length (mm)
1 x 18W	ABB 118	AWG 118	APD 118	AFM 118	AHM 118	AMR 118	600
2 x 18W	ABB 218	AWG 218	APD 218	AFM 218	AHM 218	AMR 218	600
1 x 36W	ABB 136	AWG 136	APD 136	AFM 136	AHM 136	AMR 136	1200
2 x 36W	ABB 236	AWG 236	APD 236	AFM 236	AHM 236	AMR 236	1200
1 x 58W	ABB 158	AWG 158	APD 158	AFM 158	AHM 158	AMR 158	1500
2 x 58W	ABB 258	AWG 258	APD 258	AFM 258	AHM 258	AMR 258	1500

## PHOTOMETRIC DATA (cd/1000 lumens)

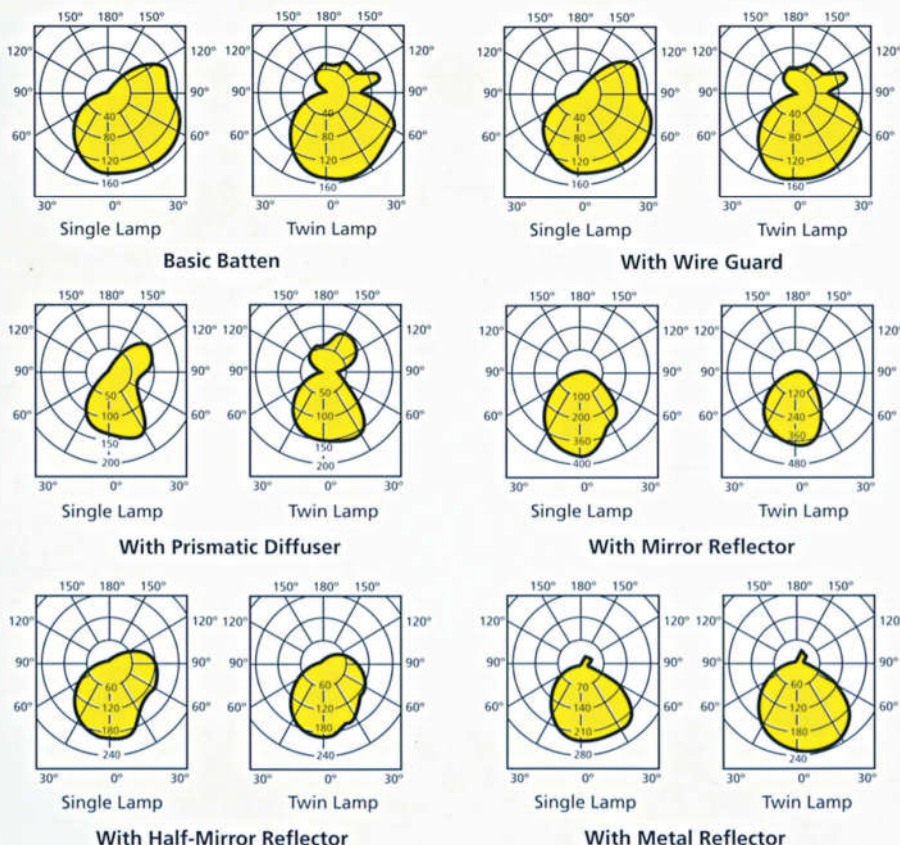

Basic Batten



With Wire Guard



With Prismatic Diffuser



With Mirror Reflector



With Half-Mirror Reflector



With Metal Reflector

Specifications are subject to changes without prior notice