



LED Stadium Light STL-A Series



Features

- Multiple functions: Motion sensor, Daylight sensor, DALI, Zigbee, 0-10V and other smart dimming are your options.
- High luminous efficiency and stability with using the world-class accessories (LEDs/Driver/etc.).
- Long lifetime with excellent thermal design, high degree of protection with the Die-cast aluminum integrated structure.
- Certificate: ETL, DLC, CE, RoHS, ERP.

Applications

- Shopping mall
- Exhibition hall
- Parking lot
- Playground
- Gymnasium
- Billboards
- Building facade and public corridor


Options

Model	Power	Input	Beam angle	Lumen	Power Factor	CCT	CRI	Size(mm)	Net Weight	Warranty
CH-STL-W400-S9-A	400W	AC100-277V AC200-528V	60° 90°	150LM/W	>0.95	2700K-6500K	>80	463x400x220mm	8.0kg	5 years
CH-STL-W600-S9-A	600W	AC100-277V AC200-528V	10° 30° 45° 60°	150LM/W	>0.95	2700K-6500K	>80	592x509x423mm	17.0kg	5 years
CH-STL-W1000-S9-A	1000W	AC100-277V AC200-528V	10° 30° 45° 60°	150LM/W	>0.95	2700K-6500K	>80	697x649x520mm	26.0kg	5 years
CH-STL-W1600-S9-A	1600W	AC100-277V AC200-528V	10° 30° 45° 60°	150LM/W	>0.95	2700K-6500K	>80	831x772x570mm	42.0kg	5 years




Dimensional drawin


400W




600W

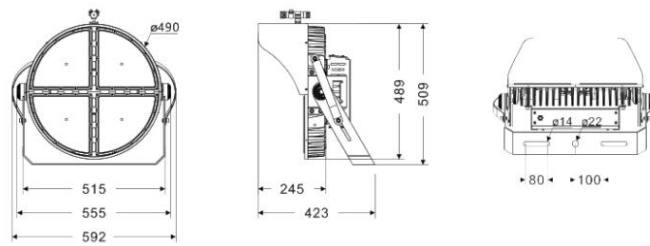

1000W

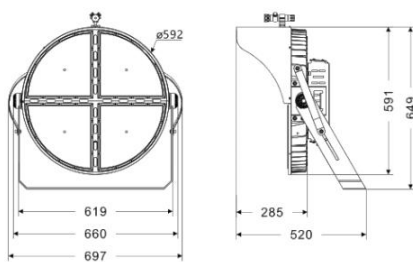


1600W

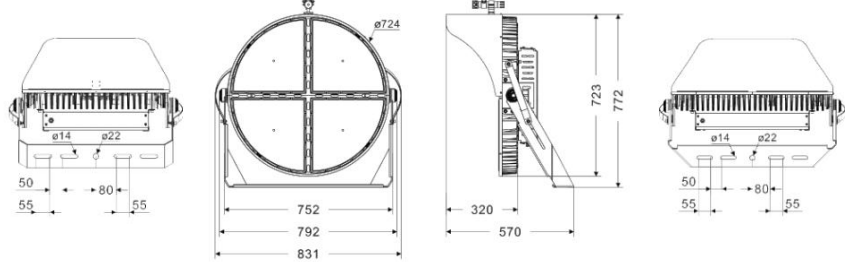


Installation

1. Please turn off the power before operation.
2. LED lamp is extremely bright. To avoid possible damage to the eyes, do not stare into LED beam.
3. Please check the working voltage of product from the product label, do not exceed the working voltage range.
4. Input product line: brown or black is **L**, blue or white is **N**, yellow-green or green is **GND**.
5. Be sure wiring is closed and prevent leakage, when installing.
6. Please install and use the product under local fire regulations.


Ground mounted




Surface mounted



Wall mounted



Column mounted



Packaging information

Model	Carton size	N.W. (kg)	G.W (kg)	QTY. (PCS)	20'Container (PCS)	40'Container (PCS)
CH-STL-W400-S9-A	43x43x20CM	8	10.5	1	840	1720
CH-STL-W600-S9-A	62x60x18CM	17	20.5	1	444	912
CH-STL-W1000-S9-A	77x72x19CM	26	29	1	303	606
CH-STL-W1600-S9-A	93x88x20CM	42	47	1	174	360