

LED Stadium Light STL-B Series




Features


- Multiple functions: Motion sensor, Daylight sensor, DALI, Zigbee, 0-10V and other smart dimming are your options.
- High luminous efficiency and stability with using the world-class accessories (LEDs/Driver/etc.).
- Long lifetime with excellent thermal design, The radiator is made of high purity aluminum, which has good heat dissipation performance.
- Certificate: ETL, DLC, CE, RoHS, ERP.

Applications

- Shopping mall
- Exhibition hall
- Parking lot
- Playground
- Gymnasium
- Billboards
- Building facade and public corridor

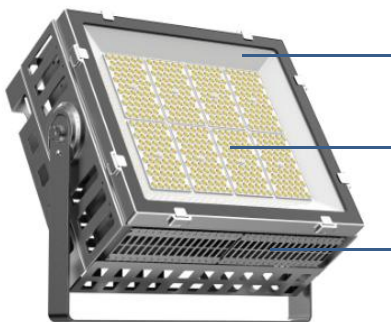

- High strength tempered glass
- Highly transparent lens
- Aviation grade aluminum




Excellent cooling design,
longer service life

Options

Model	Power	Input	Beam angle	Lumen	Power Factor	CCT	CRI	Size(mm)	Net Weight	Warranty
CH-STL-W400-S9-B	400W	AC100-277V AC200-528V	20° 30° 60° 90°	140LM/W	>0.95	2700K-6500K	>80	394x372x163mm	7.6kg	5 years
CH-STL-W600-S9-B	600W	AC100-277V AC200-528V	20° 30° 60° 90°	140LM/W	>0.95	2700K-6500K	>80	515x372x163mm	10.2kg	5 years
CH-STL-W1000-S9-B	1000W	AC100-277V AC200-528V	20° 30° 60° 90°	140LM/W	>0.95	2700K-6500K	>80	576x473x163mm	14.4kg	5 years



Dimensional drawin

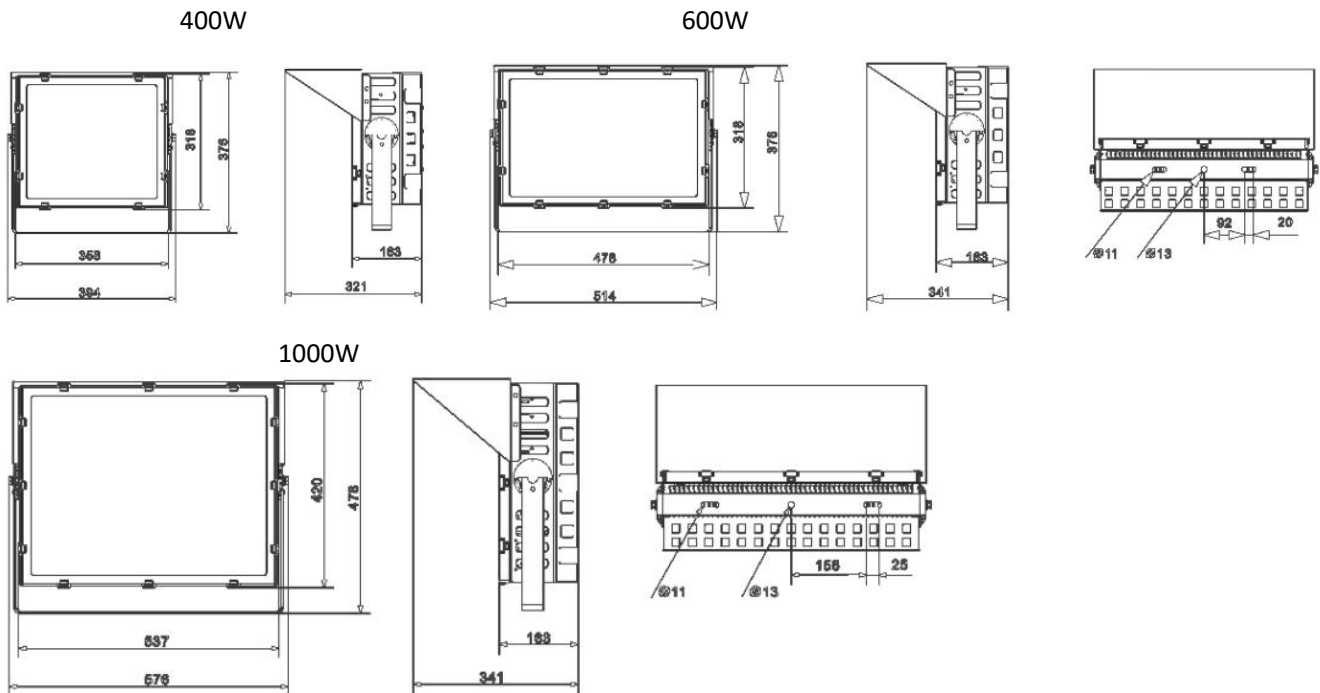


Installation

1. Please turn off the power before operation.
2. LED lamp is extremely bright. To avoid possible damage to the eyes, do not stare into LED beam.
3. Please check the working voltage of product from the product label, do not exceed the working voltage range.
4. Input product line: brown or black is **L**, blue or white is **N**, yellow-green or green is **GND**.
5. Be sure wiring is closed and prevent leakage, when installing.
6. Please install and use the product under local fire regulations.

Ground mounted



Surface mounted



Wall mounted



Column mounted



Packaging information

Model	Carton size	N.W. (kg)	G.W (kg)	QTY. (PCS)	20'Container (PCS)	40'Container (PCS)
CH-STL-W400-S9-B	41x41x21CM	7.6	9.0	1	793	1643
CH-STL-W600-S9-B	41x53x21CM	10.2	12.0	1	614	1271
CH-STL-W1000-S9-B	51x59x21CM	14.4	17.0	1	443	918