



Base Cloths








Shibori offers a wide variety of commercial grade, high performance fabrics and wallcoverings suitable for commercial and residential use. Available in a variety of designs, colours and substrates Shibori fabrics offers a design solution for every application.





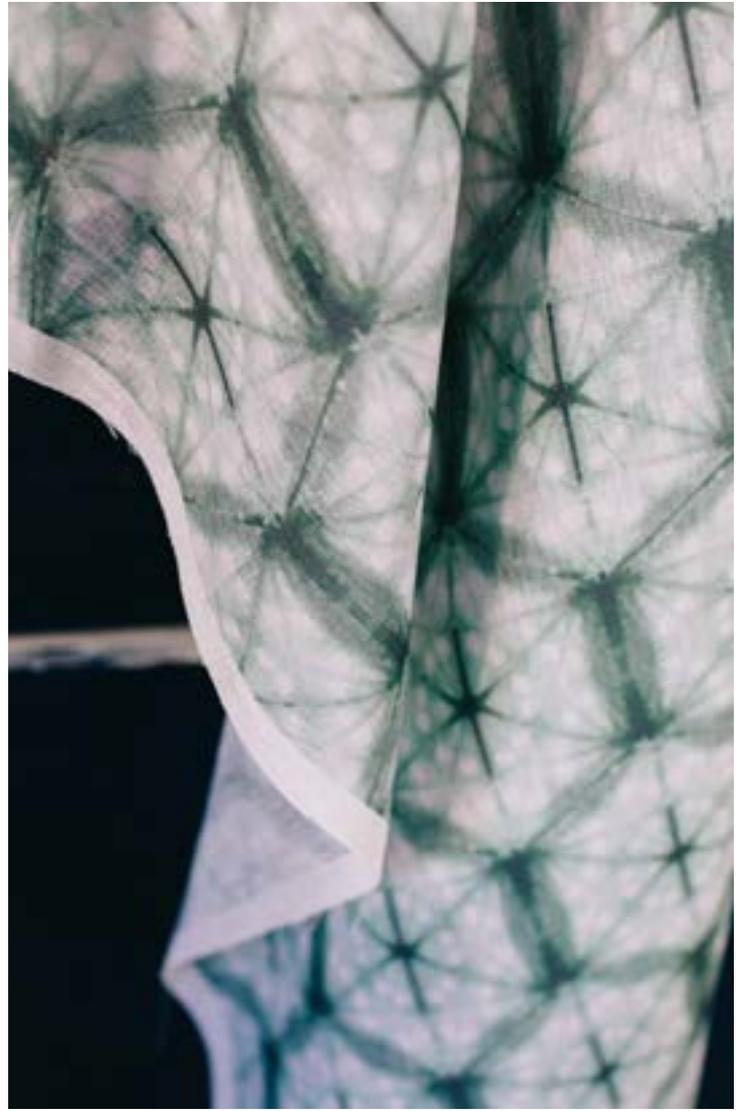

Fabrics





Composition: 100% Polyester Printed Width: 140cm Weight: 390 g/m2

Description: Soft and luxurious high performance felted polyester.

Performance

Abrasion: AS 2001.2.25.2 – 2006	90,000	Colourfastness To Light : ISO-BO2-1994 (CMYK)	5 - (6-7)
Fire Rating: AS 1530.3	Yes	Colourfastness to Washing: 5 AS 2001.4.15-2006	
Pilling Resistance: IWS 1 6-1996	5	Colourfastness to Rubbing: (AS2687 - 1997 Class 4)	Wet 4-5, Dry 5

Care Instructions

Machine Washable | Iron on Medium Heat | Do Not Bleach | Line Dry

Protect from direct sunlight | Regularly vacuum on low suction, using the upholstery attachment.

Maintenance

Spot cleaning -

Test cleaning method on hidden section first

Treat spills and stains as soon as possible: Gently remove soil or mop any liquids from the surface of the fabric.

Do not scrub. Apply dry cleaning solvent strictly according to instructions.

Do not saturate the fabric with water or other cleaning liquids.

If further cleaning is needed, professional use of dry-cleaning or hot water extraction machines is recommended.

Recommendations -

Only use upholstery detergents.

Dry in shade away from direct heat or sunlight

spec sheet: FLOYD





Composition: 100% Polyester

Printed Width: 140cm

Weight: 554 g/m2

Description: The look and feel of linen upholstery, in 100% polyester for increased performance and occasional outdoor use.

Performance

Abrasion: 100,000
AS 2001.2.25.2 – 2006

Fire Rating: Yes
AS 1530.3

Colourfastness To Light : 5 - (6-7)
ISO-BO2-1994 (CMYK)

Colourfastness to Washing: 5
AS 2001.4.15-2006

Colourfastness to Rubbing: Wet 4-5, Dry 5
(AS2687 - 1997 Class 4)

Care Instructions

Machine Washable | Iron on Medium Heat | Do Not Bleach | Line Dry

Protect from direct sunlight | Regularly vacuum on low suction, using the upholstery attachment.

Maintenance

Spot cleaning -

Test cleaning method on hidden section first

Treat spills and stains as soon as possible: Gently remove soil or mop any liquids from the surface of the fabric.

Do not scrub. Apply dry cleaning solvent strictly according to instructions.

Do not saturate the fabric with water or other cleaning liquids.

If further cleaning is needed, professional use of dry-cleaning or hot water extraction machines is recommended.

Recommendations -

Only use upholstery detergents.

Dry in shade away from direct heat or sunlight

spec sheet: FELIX





Composition: 100% Polyester **Printed Width:** 140cm **Weight:** 190 g/m²

Description: Contemporary Bouclé sheer drapery suitable for occasional outdoor use.

Performance

Fire Rating: AS 1530.3 Yes

Colourfastness To Light : ISO-BO2-1994 (CMYK) 5 - (6-7)

Colourfastness to Washing: AS 2001.4.15-2006 5

Colourfastness to Rubbing: (AS2687 - 1997 Class 4) Wet 4-5, Dry 5

Care Instructions

Machine Washable | Iron on Medium Heat | Do Not Bleach | Line Dry

Protect from direct sunlight

Maintenance

Spot cleaning -

Test cleaning method on hidden section first

Treat spills and stains as soon as possible: Gently remove soil or mop any liquids from the surface of the fabric.

Do not scrub. Apply dry cleaning solvent strictly according to instructions.

Do not saturate the fabric with water or other cleaning liquids.

If further cleaning is needed, professional use of dry-cleaning or hot water extraction machines is recommended.

Recommendations -

Only use upholstery detergents.

Dry in shade away from direct heat or sunlight

spec sheet: SAVANNAH







Wallcovering





Composition: Vinyl Face Printed Width: 133cm Weight: 616g/m²

Description: Commercial vinyl wallcovering with a heavy texture. Printed using waterbased latex ink technology.

Performance

Mould/Mildew: Yes
CA-1350 Air Quality Standards

Fire Rating: Yes
AS/NZS 3837-1998
ASTM-E84 Tunnel Test Class A

Environmental: Yes
ASTM-G21

Construction:

Ultra-white embossed vinyl face with laminated fabric backing. Backing is poly-cotton woven or polyester/pulp non-woven depending on face emboss.

Maintenance:

Laminates are available for application at the installation phase which can provide additional protection.

Do not scrub wallpapers with abrasive materials as this could cause the print to be lifted.

Listed below are the solutions that can be used for cleaning.

1. Clear warm water.
2. Mild soapy warm water, then rinse.
3. Light household cleaners, warm water, then rinse.
4. Do not use solvent based cleaning agents, lacquer thinners, nail polish remover, pine oil or cleaning agents containing bleach, which may cause discoloration over a period of time.
5. A cloth or towel should only be used to PAT dry (not rub). Do not use manmade (i.e. polyester) sponges.

spec sheet: VERONA

