

LED Covered Strip Fixture

CERTIFICATIONS



PRODUCT FEATURES



Construction

Steel housing and acrylic lens

Applications

- Schools
- Offices
- Hospitals
- Stores

Mounting

- Surface Mount
- Aircraft Cables

Warranty

7-Year Limited Product Warranty
(Optional 10-Year Warranty available)

BENEFITS

- Available in 4' and 8'
- Designed as a direct replacement for fluorescent strips.
- Standard 0-10VDC dimming capability
- Selectable wattage and patent-pending sensory ready technology available



SPECIFICATIONS

Available Wattage	24W - 65W
Available CCT	4000K, 5000K
Efficacy Average	131 LM/W - 133 LM/W
Lumen Output	3,144 LM - 8,645 LM
Input Voltage	AC100-277V
Input Frequency	50/60HZ
CRI	>80
Power Factor	0.9
THD	>20%
Working Temp	-40F to 122F (-40C to 50C)
Lens	Frosted
IP Rating	IP44
Dimming	Yes
Life Span (Hours)	>70,000



LED Covered Strip Fixture



Order Coder	DLC Code	Size	Watts	CCT	LM/Watt	Total LM	Voltage
02390	MES-STRIP-4FT-32WD-40K	4FT	32W	4000K	131 LM/W	4,192 LM	100-277V
02391	MES-STRIP-4FT-32WD-50K	4FT		5000K	133 LM/W	4,256 LM	100-277V
02394	MES-STRIP-8FT-65WD-40K	8FT	65W	4000K	131 LM/W	8,515 LM	100-277V





Order Coder	DLC Code	Size	Watts	CCT	LM/Watt	Total LM	Voltage
02392	MES-STRIP-4FT-24WD-40K	4FT	24W	4000K	131 LM/W	3,144 LM	100-277V
02393	MES-STRIP-4FT-24WD-50K	4FT		5000K	133 LM/W	3,192 LM	100-277V
02392	MES-STRIP-4FT-32WD-40K	4FT	32W	4000K	131 LM/W	4,192 LM	100-277V
02393	MES-STRIP-4FT-32WD-50K	4FT		5000K	133 LM/W	4,256 LM	100-277V
02392	MES-STRIP-4FT-40WD-40K	4FT	40W	4000K	131 LM/W	5,240 LM	100-277V
02393	MES-STRIP-4FT-40WD-50K	4FT		5000K	133 LM/W	5,094 LM	100-277V
02396	MES-STRIP-8FT-40WD-40K	8FT	40W	4000K	131 LM/W	5,240 LM	100-277V
02397	MES-STRIP-8FT-40WD-50K	8FT		5000K	133 LM/W	5,320 LM	100-277V
02396	MES-STRIP-8FT-65WD-40K	8FT	65W	4000K	131 LM/W	8,515 LM	100-277V
02397	MES-STRIP-8FT-65WD-50K	8FT		5000K	131 LM/W	8,382 LM	100-277V




Order Coder	DLC Code	Size	Watts	CCT	LM/Watt	Total LM	Voltage
02377	MES-STRIP-4FT-24WD-40K	4FT	24W	4000K	131 LM/W	3,144 LM	100-277V
02378	MES-STRIP-4FT-24WD-50K	4FT		5000K	133 LM/W	3,192 LM	100-277V
02377	MES-STRIP-4FT-32WD-40K	4FT	32W	4000K	131 LM/W	4,192 LM	100-277V
02378	MES-STRIP-4FT-32WD-50K	4FT		5000K	133 LM/W	4,256 LM	100-277V
02377	MES-STRIP-4FT-40WD-40K	4FT	40W	4000K	131 LM/W	5,240 LM	100-277V
02378	MES-STRIP-4FT-40WD-50K	4FT		5000K	133 LM/W	5,094 LM	100-277V
02379	MES-STRIP-8FT-40WD-40K	8FT	40W	4000K	131 LM/W	5,240 LM	100-277V
02380	MES-STRIP-8FT-40WD-50K	8FT		5000K	133 LM/W	5,320 LM	100-277V
02379	MES-STRIP-8FT-65WD-40K	8FT	65W	4000K	131 LM/W	8,515 LM	100-277V
02380	MES-STRIP-8FT-65WD-50K	8FT		5000K	131 LM/W	8,382 LM	100-277V

LED Covered Strip Fixture

PHOTOMETRIC DATA

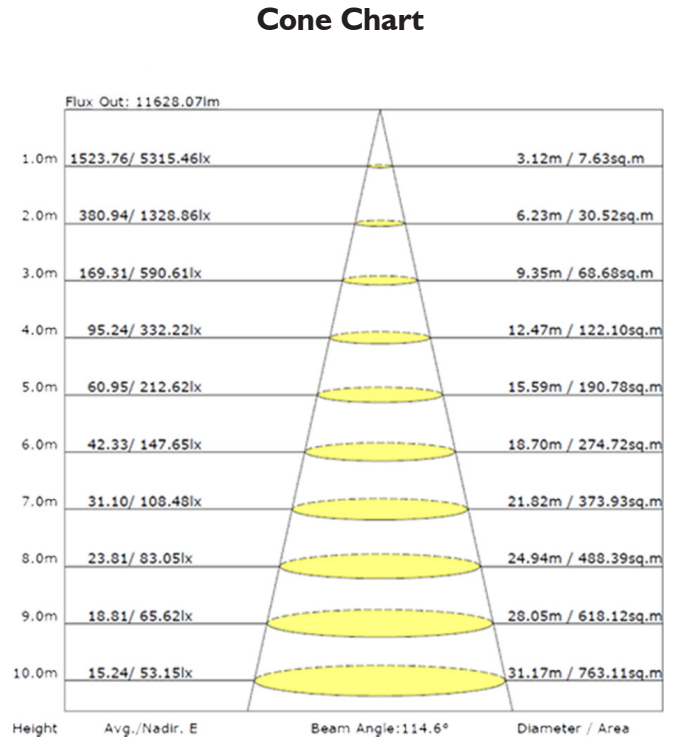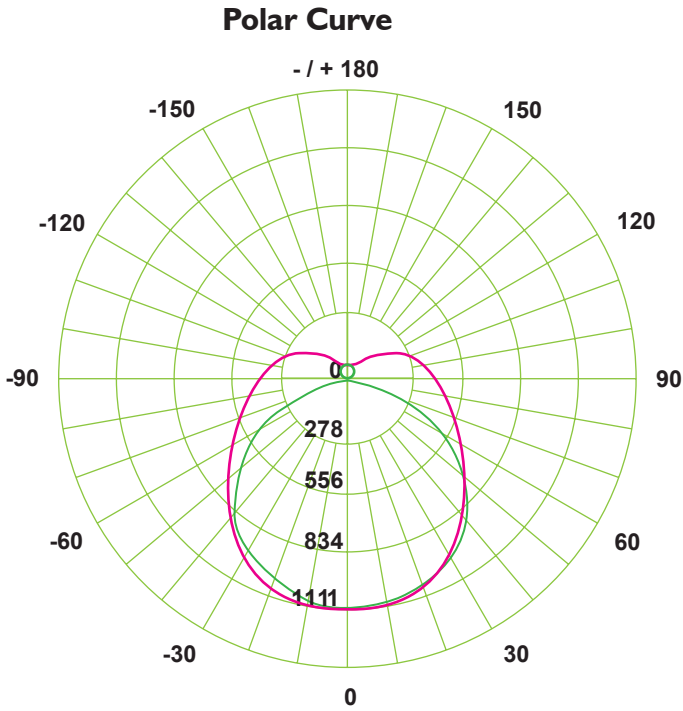

DIMENSIONS

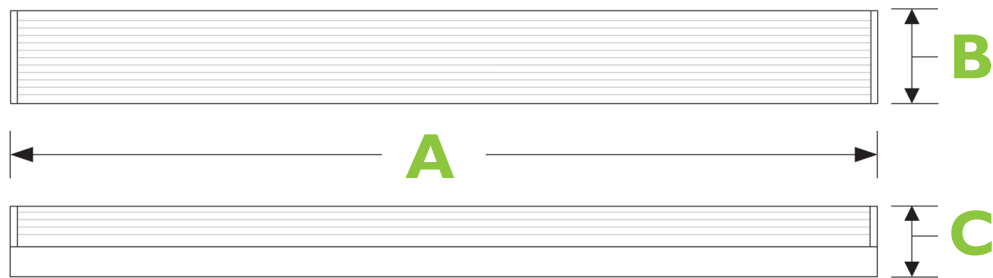

Fixture Length	A	B	C
4'	48"	3.08"	3.5"
8'	95"	3.08"	3.5"

LED Covered Strip Fixture

LIGHTING CONTROLS

Order Code	Description	Height	Voltage	Color	Version	Function
06450	LED PIR Fixture Mounted Sensor	49ft	120-277V	White	Standard	Simple On/Off
06221	LED Microwave Fixture Mounted Sensor	19ft	120-277V	White	Standard	3-in-1
06222	LED Microwave Fixture Mounted Sensor	49ft	120-277V	White	Standard	3-in-1
06225	LED Microwave Fixture Mounted Sensor	49ft	347-480V	White	Standard	3-in-1
06230	DC Powered 3-in-1 Microwave Sensor for Sensor Ready Troffer	19ft	10-15 VDC	White	Sensor Ready	3-in-1
06278	LED Intelligent Remote Control	-	-	White	Standard	LCD Display