


LED Downlight (Cedar G)

CERTIFICATIONS



PRODUCT FEATURES

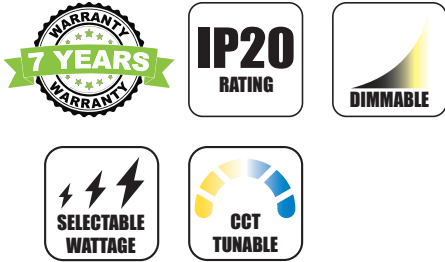

Construction

High-grade aluminum housing

Applications

- Offices
- Conference rooms
- Schools
- Retail stores
- Health care facilities

Mounting

- Mountable in a T-grid or hard ceiling

Warranty

7-Year Limited Product Warranty
(Optional 10-Year Warranty available)

BENEFITS

- Available in 4", 6", 8", and 10"
- Selectable wattage and color temperatures
- Internal flicker free driver
- 0-10V dimming



SPECIFICATIONS	
Available Wattage	6W - 50W
Available CCT	3000K , 4000K, 5000K
Efficacy Average	85 LM/W
Lumen Output	510 LM - 4,250 LM
Input Voltage	AC120-277V
Input Frequency	50/60HZ
CRI	>80
Power Factor	0.9
THD	<25%
Working Temp	14F TO 104F (-10C TO 40C)
Lens	Frosted
IP Rating	IP20
Dimming	Yes
Life Span (Hours)	>70,000

LED Downlight (Cedar G)


Order Code	Size	Wattage	CCT	LM/Watt	Total LM	Voltage
02920	4"	6W	3000K 3500K 4000K	85 LM/W	510 LM	120-277V
		7.5W			638 LM	
		11.5W			978 LM	
02921	6"	15W	3000K 3500K 4000K	85 LM/W	1,275 LM	120-277V
		23W			1,955 LM	
		30W			2,550 LM	
02922	8"	15W	3000K 3500K 4000K	85 LM/W	1,275 LM	120-277V
		23W			1,955 LM	
		30W			2,550 LM	
02923	8"	37W	3000K 3500K 4000K	85 LM/W	3,145 LM	120-277V
		42W			3,570 LM	
		50W			4,250 LM	
02925	4"	6W	3500K 4000K 5000K	85 LM/W	510 LM	120-277V
		7.5W			638 LM	
		11.5W			978 LM	
02926	6"	15W	3500K 4000K 5000K	85 LM/W	1,275 LM	120-277V
		23W			1,955 LM	
		30W			2,550 LM	
02927	8"	15W	3500K 4000K 5000K	85 LM/W	1,275 LM	120-277V
		23W			1,955 LM	
		30W			2,550 LM	
02928	8"	37W	3500K 4000K 5000K	85 LM/W	3,145 LM	120-277V
		42W			3,570 LM	
		50W			4,250 LM	
02929	10"	37W	3500K 4000K 5000K	85 LM/W	3,145 LM	120-277V
		42W			3,570 LM	
		50W			4,250 LM	

↑ When placing your order, please use **Order Code**.


LED Downlight (Cedar G)

PHOTOMETRIC DATA



Polar Curve

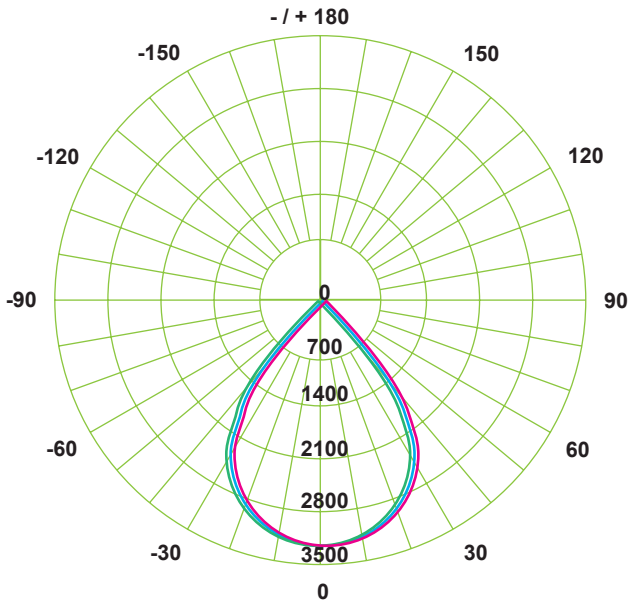

Cone Chart

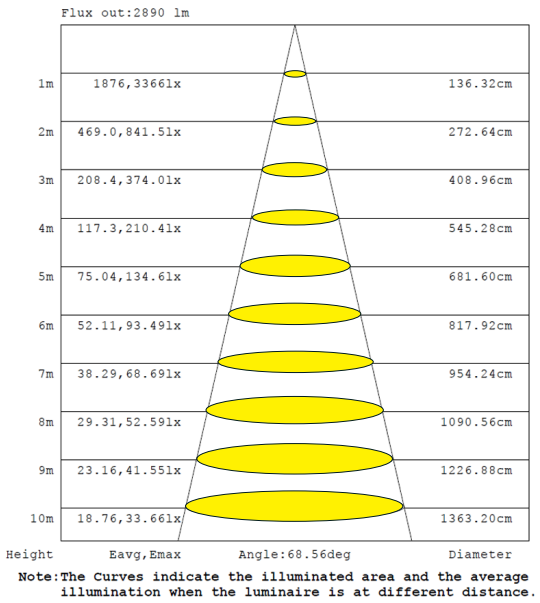

DIMENSIONS

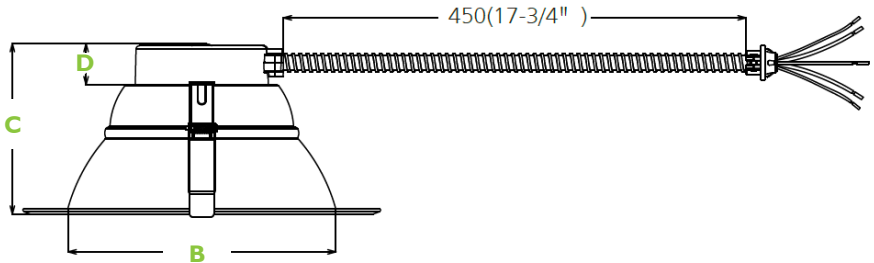

Fixture Size	A	B	C	D
4"	5.9"	3.8"	3.6"	1.3"
6"	8.3"	5.3"	4.3"	1.3"
8"	10.6"	7.8"	4.8"	1.3"
10"	11.5"	8.6"	5.5"	1.3"

LED Downlight (Cedar G)

LIGHTING CONTROLS

Order Code	Description	Height	Voltage	Color	Version	Function
06210	3-in-1 Microwave Fixture Embedded w/ Detachable Sensor	19ft	120-277V	White	Standard	3-in-1
06278	LED Intelligent Remote Control	-	-	White	Standard	LCD Display

