

LED Full Cut Off Wall Pack

CERTIFICATIONS



PRODUCT FEATURES



Construction

Die-cast aluminum housing with die-cast aluminum with polycarbonate lens

Applications

- Hospitals
- Warehouses
- Factories
- Storage
- Retail

Mounting

- Surface mount

Warranty

7-Year Limited Product Warranty
(Optional 10-Year Warranty available)

BENEFITS

- Rugged exterior housing
- Ideal for commercial outdoor buildings, and easily replaces any preexisting wall pack fixture.

SPECIFICATIONS	
Available Wattage	30W - 80W
Available CCT	5000K
Efficacy Average	123 LM/W - 135 LM/W
Lumen Output	3,720 LM - 10,960 LM
Input Voltage	AC120-277V, AC120-347V
Input Frequency	50/60HZ
CRI	>70
Power Factor	0.9
THD	<20%
Working Temp	-22°F to 113°F (-30°C TO 45°C)
Lens Type	Polycarbonate
IP Rating	IP65
Dimming	Yes (0-10V)
Life Span (Hours)	>70,000



LED Full Cut Off Wall Pack

Order Code	DLC Model #	Wattage	CCT	LM/Watt	Total LM	Voltage
05123	MES-FWP-G2-30WL[D,PS,M]-5K	30W	5000K	137 LM/W	4,110 LM	120-277V
05123	MES-FWP-G2-40WL[D,PS,M]-5K	40W		137 LM/W	5,480 LM	120-277V
05124	MES-FWP-G2-40WL[D,PS,M]-5K	40W		137 LM/W	5,480 LM	120-277V
05124	MES-FWP-G2-60WL[D,PS,M]-5K	60W		137 LM/W	8,220 LM	120-277V
05124	MES-FWP-G2-80WL[D,PS,M]-5K	80W		137 LM/W	10,960 LM	120-277V
05125	MES-FWP-G2-40W[L;M][P;C;MC;PC;PSC;SC]-3CCT	30W	3000K 4000K 5000K	124 LM/W	3,720 LM	120-277V 120-347V
05125	MES-FWP-G2-40W[L;M][P;C;MC;PC;PSC;SC]-3CCT	40W		124 LM/W	4,960 LM	120-277V 120-347V

↑ When placing your order, please use **Order Code**.



PHOTOMETRIC DATA

Polar Curve

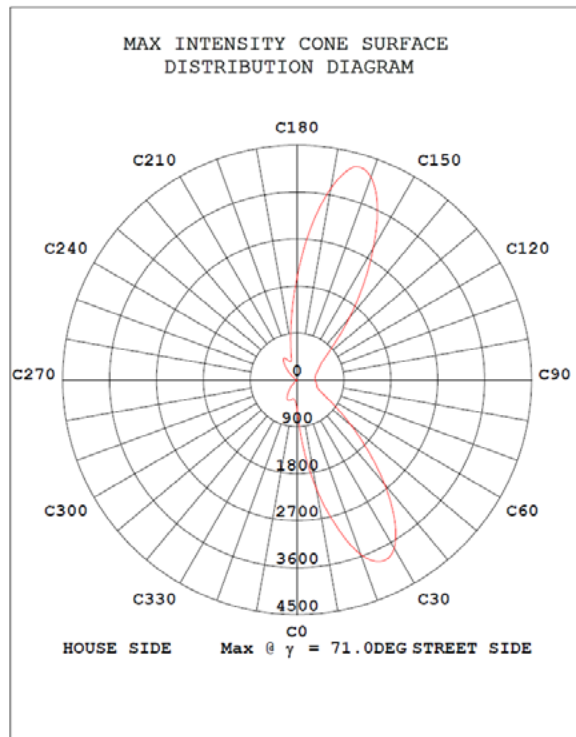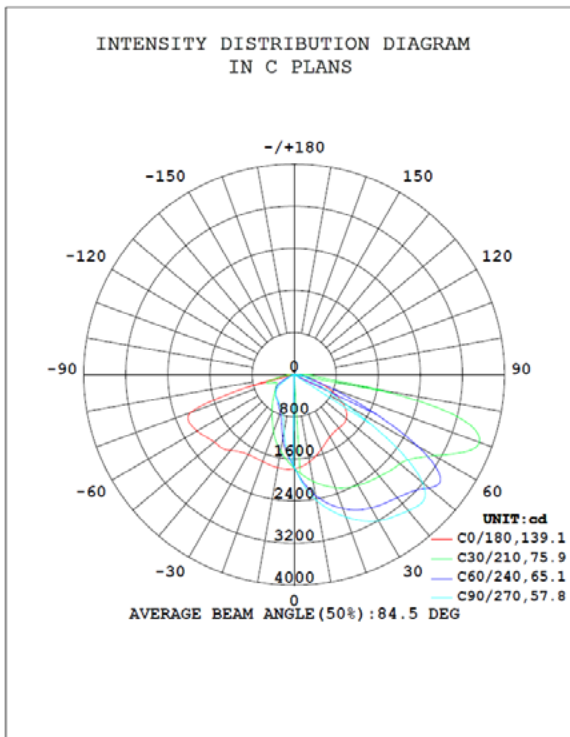

LED Full Cut Off Wall Pack

DIMENSIONS

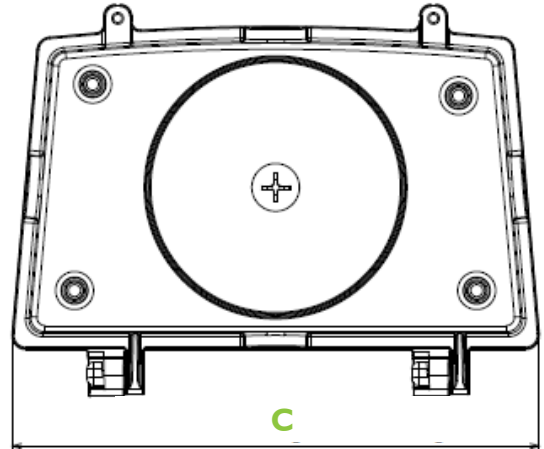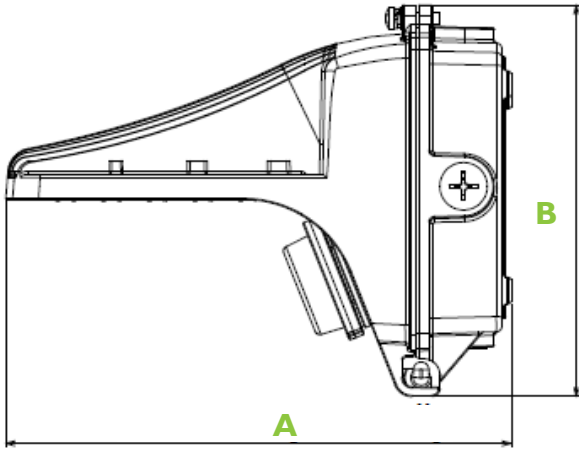

A	B	C
8.7"	6.7"	9.07"

LIGHTING CONTROLS

Order Code	Description	Height	Voltage	Color	Version	Function
06251	DC Powered 3 in 1 Sensor for Outdoor Fixtures	49ft	120-277V	Black	Standard	3-in-1