

LED Petroleum Canopy Light

CERTIFICATIONS



PRODUCT FEATURES



Construction

Die-Cast aluminum housing with integral heat sink

Applications

- Warehouse
- Factory
- Workshops
- Gas station

Mounting

- Soffit
- Canopy
- Surface mount

Warranty

7-Year Limited Product Warranty
(Optional 10-Year Warranty available)

BENEFITS

- Capable of being mounted in any soffit/canopy or even surface mounted.
- 120-degree beam angle is perfect for illuminating large spaces without leaving dark spots.

SPECIFICATIONS

Available Wattage	120W - 150W
Available CCT	5000K
Efficacy Average	132 LM/W - 133 LM/W
Lumen Output	15,942 LM - 19,974 LM
Input Voltage	AC100-277V
Input Frequency	50/60HZ
CRI	>80
Power Factor	0.9
THD	> 15%
Working Temp	-40F TO 113F (-40C TO 45C)
Lens	Striped
IP Rating	IP65
Dimming	No
Life Span (Hours)	>70,000


LED Petroleum Canopy Light

Order Coder	DLC Code	Watts	CCT	LM/Watt	Total LM	Voltage
05853	MES-CP-G3B-I20WAS-a50	120W	5000K	132 LM/W	15,942 LM	100-277V
05854	MES-CP-G3B-I50WAS-a50	150W	5000K	133 LM/W	19,974 LM	100-277V


↑ When placing your order, please use **Order Code**.

PHOTOMETRIC DATA

Polar Curve

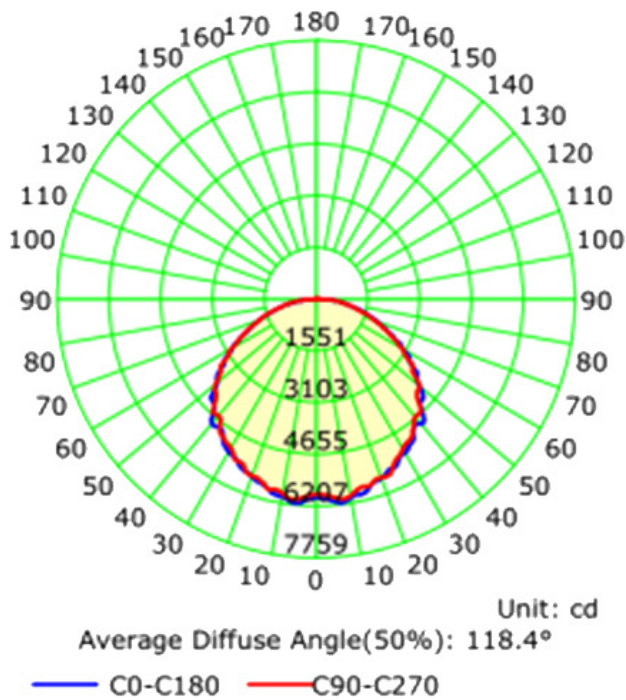


Cone Chart

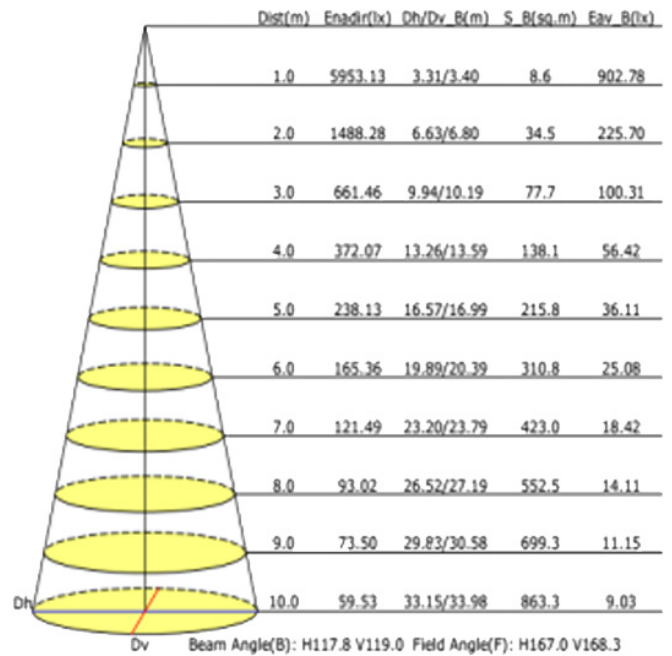

LED Petroleum Canopy Light

DIMENSIONS

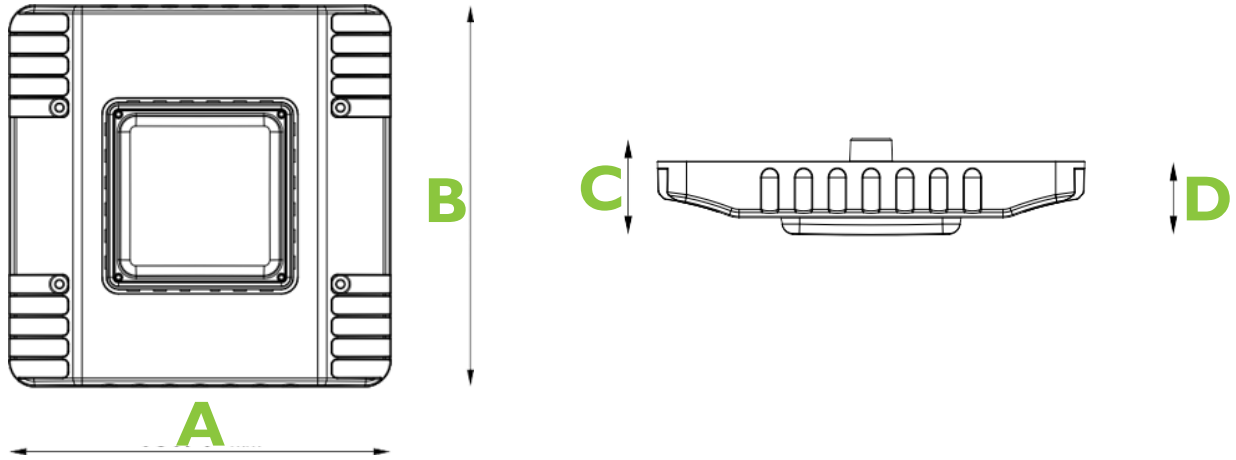

A	B	C	D
15"	15"	3.4"	2.6"

ACCESSORIES

Order Code	Description	Size	Hole	Voltage
05880	Canopy Flat Plate	18x18	8x8 Square Hole	-
05882	Canopy Flat Plate	18x18	-	-
05883	Canopy Flat Plate	24x24	8x8 Square Hole	-
05884	Canopy Flat Plate	24x24	-	-
08360	Step Down Transformer	-	-	480V to 100-277V

