

LED Type A, B, A+B Tubes (High Lumen)

CERTIFICATIONS



PRODUCT FEATURES



- Construction**
- Shatterproof, frosted glass
 - Double-end input

- Applications**
- Retail
 - Schools
 - Offices
 - Healthcare
 - Other various commercial applications

- Mounting**
- Twist in

Warranty
 7-Year Limited Product Warranty
 (Optional 10-Year Warranty available)

BENEFITS

- Instant startup
- Frosted glass eliminates pixelation
- Shatter-proof
- Environmentally friendly, no mercury used



SPECIFICATIONS	
Available Wattage	6W - 9W
Available CCT	4000K, 5000K
Efficacy Average	140 LM/W - 180 LM/W
Lumen Output	840 LM - 1,650 LM
Input Voltage	AC100-277V
Input Frequency	50/60HZ
CRI	>80
Power Factor	0.9
THD	>20%
Working Temp	-40F to 113F (-40C to 45C)
Lens	Frosted
IP Rating	IP20
Dimming	Yes
Life Span (Hours)	>70,000


LED Type A, B, A+B Tubes (High Lumen)

Order Code	DLC Model #	Wattage	Length	CCT	LM/Watt	Total LM	Voltage
09230	T8-006T051UD-24D (Type B)	6W	2ft	4000K	140 LM/W	840 LM	100-277V
09231	T8-006T051UD-24D (Type B)	6W	2ft	5000K	140 LM/W	840 LM	100-277V
09232	T8-009T102UD-24D (Type B)	9W	4ft	4000K	180 LM/W	1,650 LM	100-277V
09233	T8-009T102UD-24D (Type B)	9W	4ft	5000K	180 LM/W	1,650 LM	100-277V
09234	T8-009T102UD-24D (Type A+B)	9W	4ft	4000K	180 LM/W	1,650 LM	100-277V
09235	T8-009T102UD-24D (Type A+B)	9W	4ft	5000K	180 LM/W	1,650 LM	100-277V

↑ When placing your order, please use **Order Code**.


PHOTOMETRIC DATA

Polar Curve

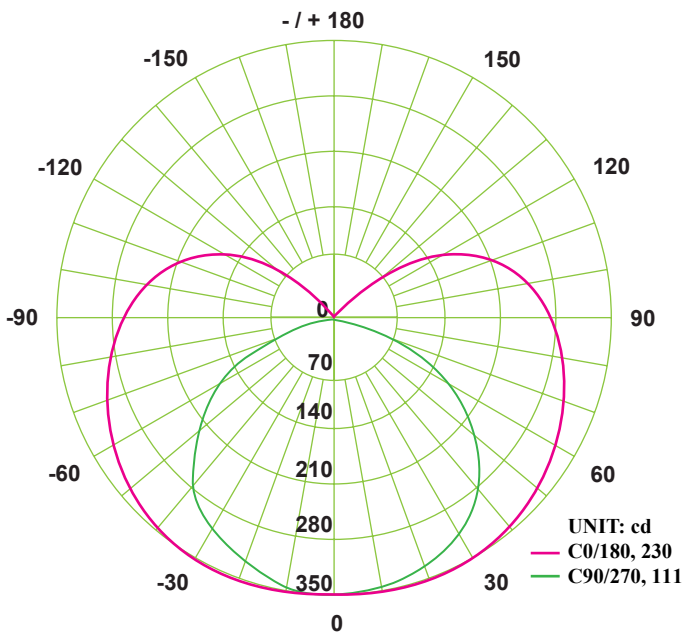


AVERAGE BEAM ANGLE (50%): 170.7 DEG

Cone Chart

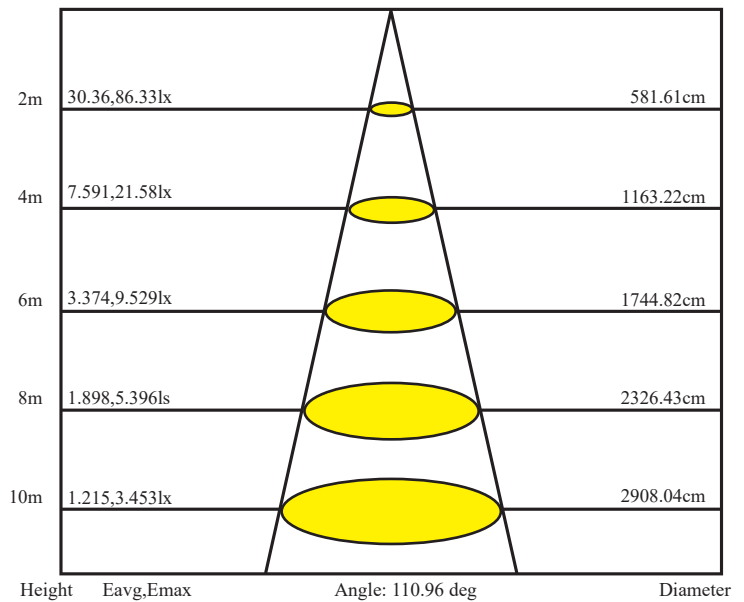

**LED Type A, B, A+B
 Tubes (High Lumen)**

DIMENSIONS

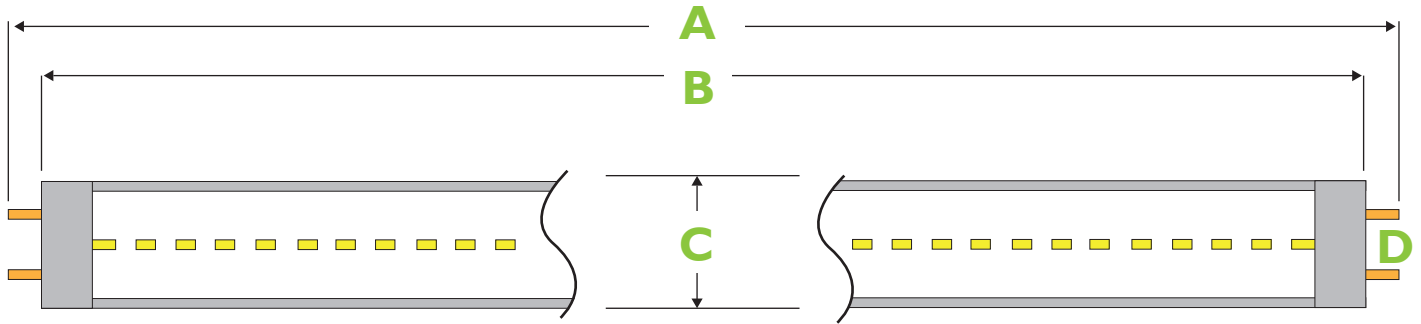

Fixture Length	A	B	C	D
2ft	23.7"	23.1"	1.0"	0.5"
4ft	47.7"	47.1"	1.0"	0.5"