

avenir[®]

Technical Specifications

VERSION 2022.03



Curv

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Watts/rail
TRH2-50	Use heated version	40 x 500 mm	1 to 5	10 Watts
TRH2-77	Use heated version	40 x 770 mm	1 to 5	20 Watts

NOTES

- This is a Low Voltage product - Safe to be installed in Zone 1 (wet areas)
- Transformer required - TRTR200-24V - Max 6 rails (Sold separately)
- Wire specifications: Use flexible multistrand 1mm² - Do not exceed 5 meters in length.

STANDARD FINISHES

Mirror Polished
Stainless Steel

RRP

Brushed
Stainless Steel

+20% (Stocked)

Matt Black/White
Painted

+40% (Stocked)

Gunmetal
PVD

+50% (Stocked)

Brushed Gold
PVD

+60% (Stocked)

SPECIFICATIONS

Voltage
24 Volts

Material
Stainless Steel 304

Finish
Mirror Polished

Ingress Protection
IPX5 (Suitable for wet areas)

Standards
AS/NZ 60335.2.43

Electrical Connection
Concealed Wiring only - any leg

Heating Method
Dry Internal Heating Element

Required / Sold Separately
Transformer (TRTR200-24V)

DEVELOPED IN
AUSTRALIA




HEATING TIME
30 MINUTES



WARRANTY
10 YEAR



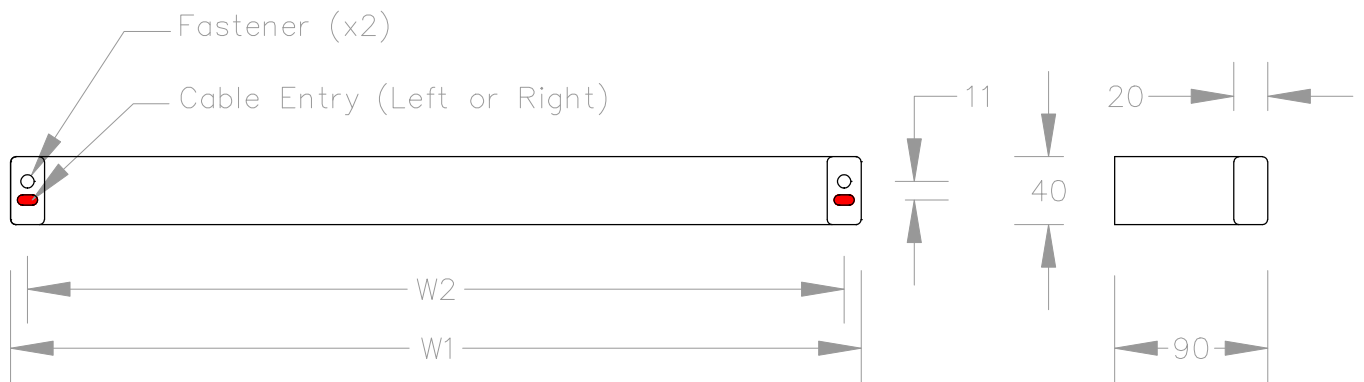

VARIATIONS

Heated Version	H1	W1 (Overall)	W2 (Fixings)
TRH2-50	40mm	500mm	480mm
TRH2-77	40mm	770mm	750mm