



Technical Specifications

VERSION 2022.01



Hybrid 1320

Heated & Non-Heated Towel Rails

VARIATIONS

| Heated Version | Non-Heated Version | Height x Width | Rails | Wattage |
|----------------|--------------------|----------------|-------|-----------|
| HYH-132x45 | HYN-132x45 | 1320 x 450 mm | 9 | 83 Watts |
| HYH-132x60 | HYN-132x60 | 1320 x 600 mm | 9 | 113 Watts |
| HYH-132x75 | HYN-132x75 | 1320 x 750 mm | 9 | 143 Watts |
| HYH-132x90 | HYN-132x90 | 1320 x 900 mm | 9 | 174 Watts |
| HYH-132x105 | HYN-132x105 | 1320 x 1050 mm | 9 | 203 Watts |

NOTES

- This is a Low Voltage product - Safe to be installed in Zone 1 (wet areas)
- Transformer included
- Concealed wiring available through any of the 4 legs
- Wire specifications: Use flexible multistrand 1.5mm² - Do not exceed 5 meters in length.
- Non Heated version available (Less \$50)
- Plug-In version not available

STANDARD FINISHES

Mirror Polished
Stainless Steel

RRP

Brushed
Stainless Steel

+20% (Stocked)

Matt Black/White
Painted

+40% (Stocked)

Gunmetal
PVD

+50% (Stocked)

Brushed Gold
PVD

+60% (Stocked)

SPECIFICATIONS

Voltage
24 Volts

Material
Stainless Steel 304

Finish
Mirror Polished

Ingress Protection
IPX5 (Suitable for wet areas)

Standards
AS/NZ 60335.2.43

Electrical Connection
Concealed Wiring std - any leg

Heating Method
Dry Internal Heating Element

Options
Non Heated

MADE IN
AUSTRALIA




HEATING TIME
30 MINUTES



WARRANTY
10 YEAR



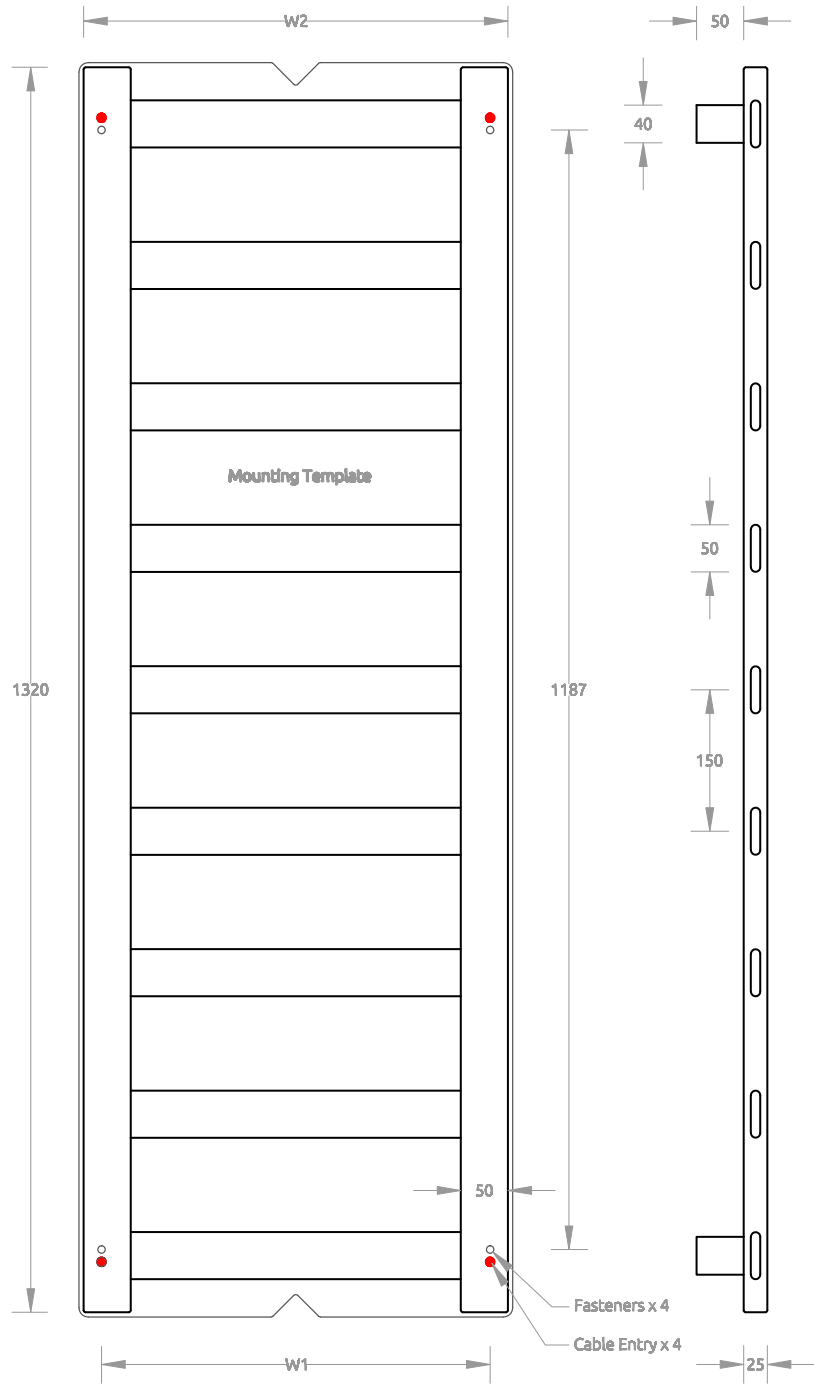

VARIATIONS

| Heated Version | Non-Heated Version | W1 (Fixings) | W2 (Overall) |
|----------------|--------------------|--------------|--------------|
| HYH-132x45 | HYN-132x45 | 412mm | 450mm |
| HYH-132x60 | HYN-132x60 | 562mm | 600mm |
| HYH-132x75 | HYN-132x75 | 712mm | 750mm |
| HYH-132x90 | HYN-132x90 | 862mm | 900mm |
| HYH-132x105 | HYN-132x105 | 1012mm | 1050mm |