



Technical Specifications

VERSION 2022.01



Hybrid 420

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Wattage
HYH-42x45	HYN-42x45	420 x 450 mm	3	28 Watts
HYH-42x60	HYN-42x60	420 x 600 mm	3	38 Watts
HYH-42x75	HYN-42x75	420 x 750 mm	3	48 Watts
HYH-42x90	HYN-42x90	420 x 900 mm	3	58 Watts
HYH-42x105	HYN-42x105	420 x 1050 mm	3	68 Watts




NOTES


- This is a Low Voltage product - Safe to be installed in Zone 1 (wet areas)
- Transformer included
- Concealed wiring available through any of the 4 legs
- Wire specifications: Use flexible multistrand 1.5mm² - Do not exceed 5 meters in length.
- Non Heated version available (Less \$50)
- Plug-In version not available

STANDARD FINISHES

Mirror Polished Stainless Steel	Brushed Stainless Steel	Matt Black/White Painted	Gunmetal PVD	Brushed Gold PVD
RRP	+20% (Stocked)	+40% (Stocked)	+50% (Stocked)	+60% (Stocked)

SPECIFICATIONS

Voltage 24 Volts	Standards AS/NZ 60335.2.43	MADE IN AUSTRALIA 
Material Stainless Steel 304	Electrical Connection Concealed Wiring std - any leg	HEATING TIME 30 MINUTES 
Finish Mirror Polished	Heating Method Dry Internal Heating Element	WARRANTY 10 YEAR 
Ingress Protection IPX5 (Suitable for wet areas)	Options Non Heated	

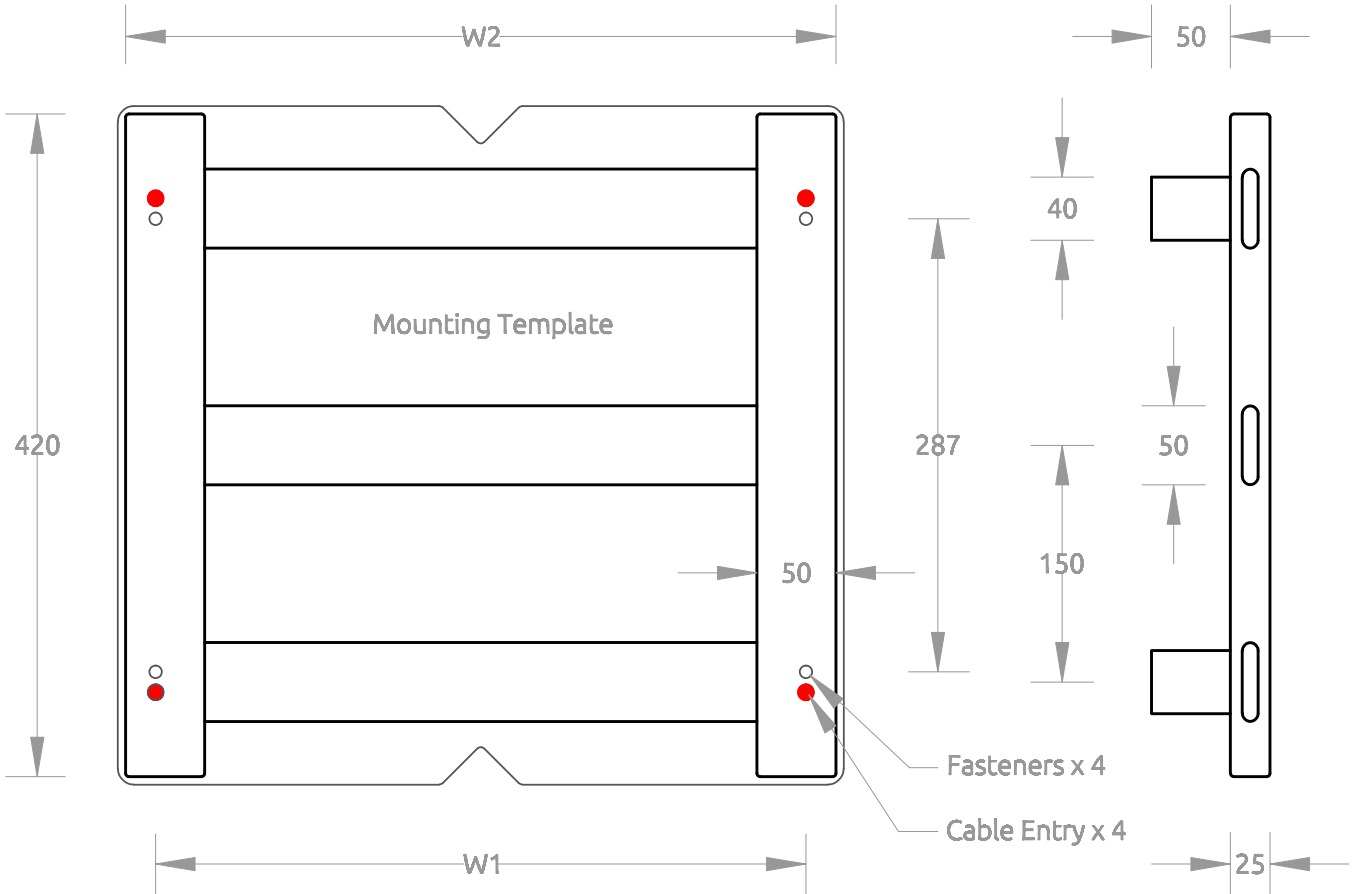

VARIATIONS

Heated Version	Non-Heated Version	W1 (Fixings)	W2 (Overall)
HYH-42x45	HYN-42x45	412mm	450mm
HYH-42x60	HYN-42x60	562mm	600mm
HYH-42x75	HYN-42x75	712mm	750mm
HYH-42x90	HYN-42x90	862mm	900mm
HYH-42x105	HYN-42x105	1012mm	1050mm