

avenir[®]

Technical Specifications

VERSION 2022.01



Therm 9

Heated & Non-Heated Towel Rails

VARIATIONS

Heated Version	Non-Heated Version	Height x Width	Rails	Wattage
TLH9-130 x 40	TLN9-130 x 40	1300 x 428 mm	9	77 Watts
TLH9-130 x 48 (*LV)	TLN9-130 x 48	1300 x 508 mm	9	87 Watts
TLH9-130 x 60	TLN9-130 x 60	1300 x 628 mm	9	102 Watts
TLH9-130 x 75	TLN9-130 x 75	1300 x 778 mm	9	122 Watts
TLH9-130 x 90	TLN9-130 x 90	1300 x 928 mm	9	140 Watts

NOTES

- This is a 240VAC product - Earth connection is ESSENTIAL
- Safe to be installed in Zone 1 (wet areas)
- Concealed wiring available through any of the 4 legs
- Wire specifications: Use flexible multistrand 1.5mm²
- Non Heated version available (Less \$50)
- Plug-In version available (Plus \$50)
- *LV - Low Voltage version - Includes Transformer (+\$135)

STANDARD FINISHES

Mirror Polished

Stainless Steel

RRP

Brushed

Stainless Steel

+20% (Stocked)

Matt Black

Painted

+40% (Stocked)

Gunmetal

PVD

+50% (Stocked)

Brushed Gold

PVD

+60% (Stocked)

SPECIFICATIONS

Voltage

240 Volts

Standards

AS/NZ 60335.2.43

Material

Stainless Steel 304

Electrical Connection

Concealed Wiring std - any leg

Finish

Mirror Polished

Heating Method

Dry Internal Heating Element

Ingress Protection

IPX5 (Suitable for wet areas)

Options

Non Heated, Plug-In, Low Voltage

MADE IN
AUSTRALIA




HEATING TIME
30 MINUTES



WARRANTY
10 YEAR



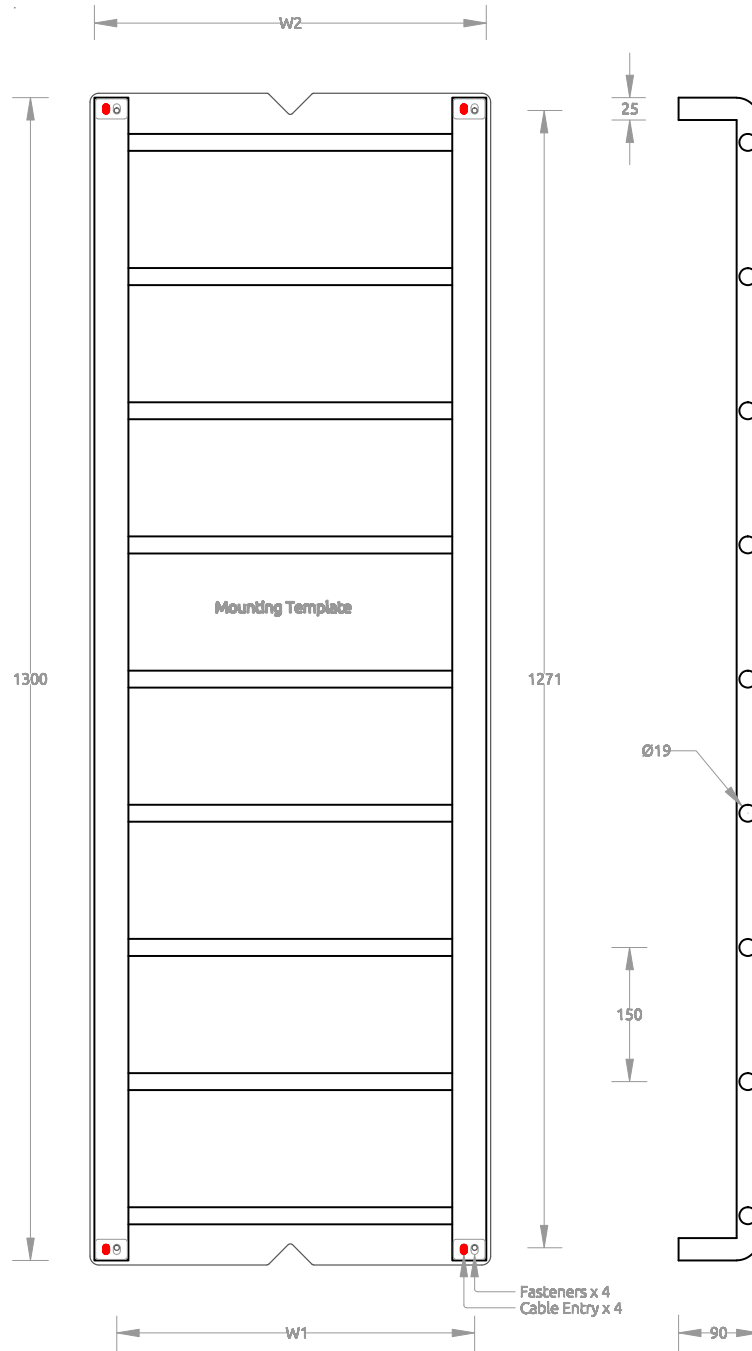

VARIATIONS

Heated Version	Non-Heated Version	W1 (Fixings)	W2 (Overall)
TLH9-130x40	TLN9-130x40	400mm	438mm
TLH9-130x48 (*LV)	TLN9-130x48	480mm	518mm
TLH9-130x60	TLN9-130x60	600mm	638mm
TLH9-130x75	TLN9-130x75	750mm	788mm
TLH9-130x90	TLN9-130x90	900mm	938mm