



Sheet Notes:

- 1- All dimensions are given to the center of the respective junction box.
- 2- All dimensions given are Above Finished Floor (AFF)
- 3- All power and data requirements included in this drawing are provided specifically and exclusively for AV systems.
- 4- Drawings provided are typical of new construction details. Retrofit environments require boxes and pathways that are minimally compliant with the AHJ and could vary significantly in type, but not location from the provided details.
- 5- All trades are to follow local rules, codes, and regulations by the Authority Having Jurisdiction (AHJ).
- 6- Display to be mounted with Chief TS525TU not shown below.

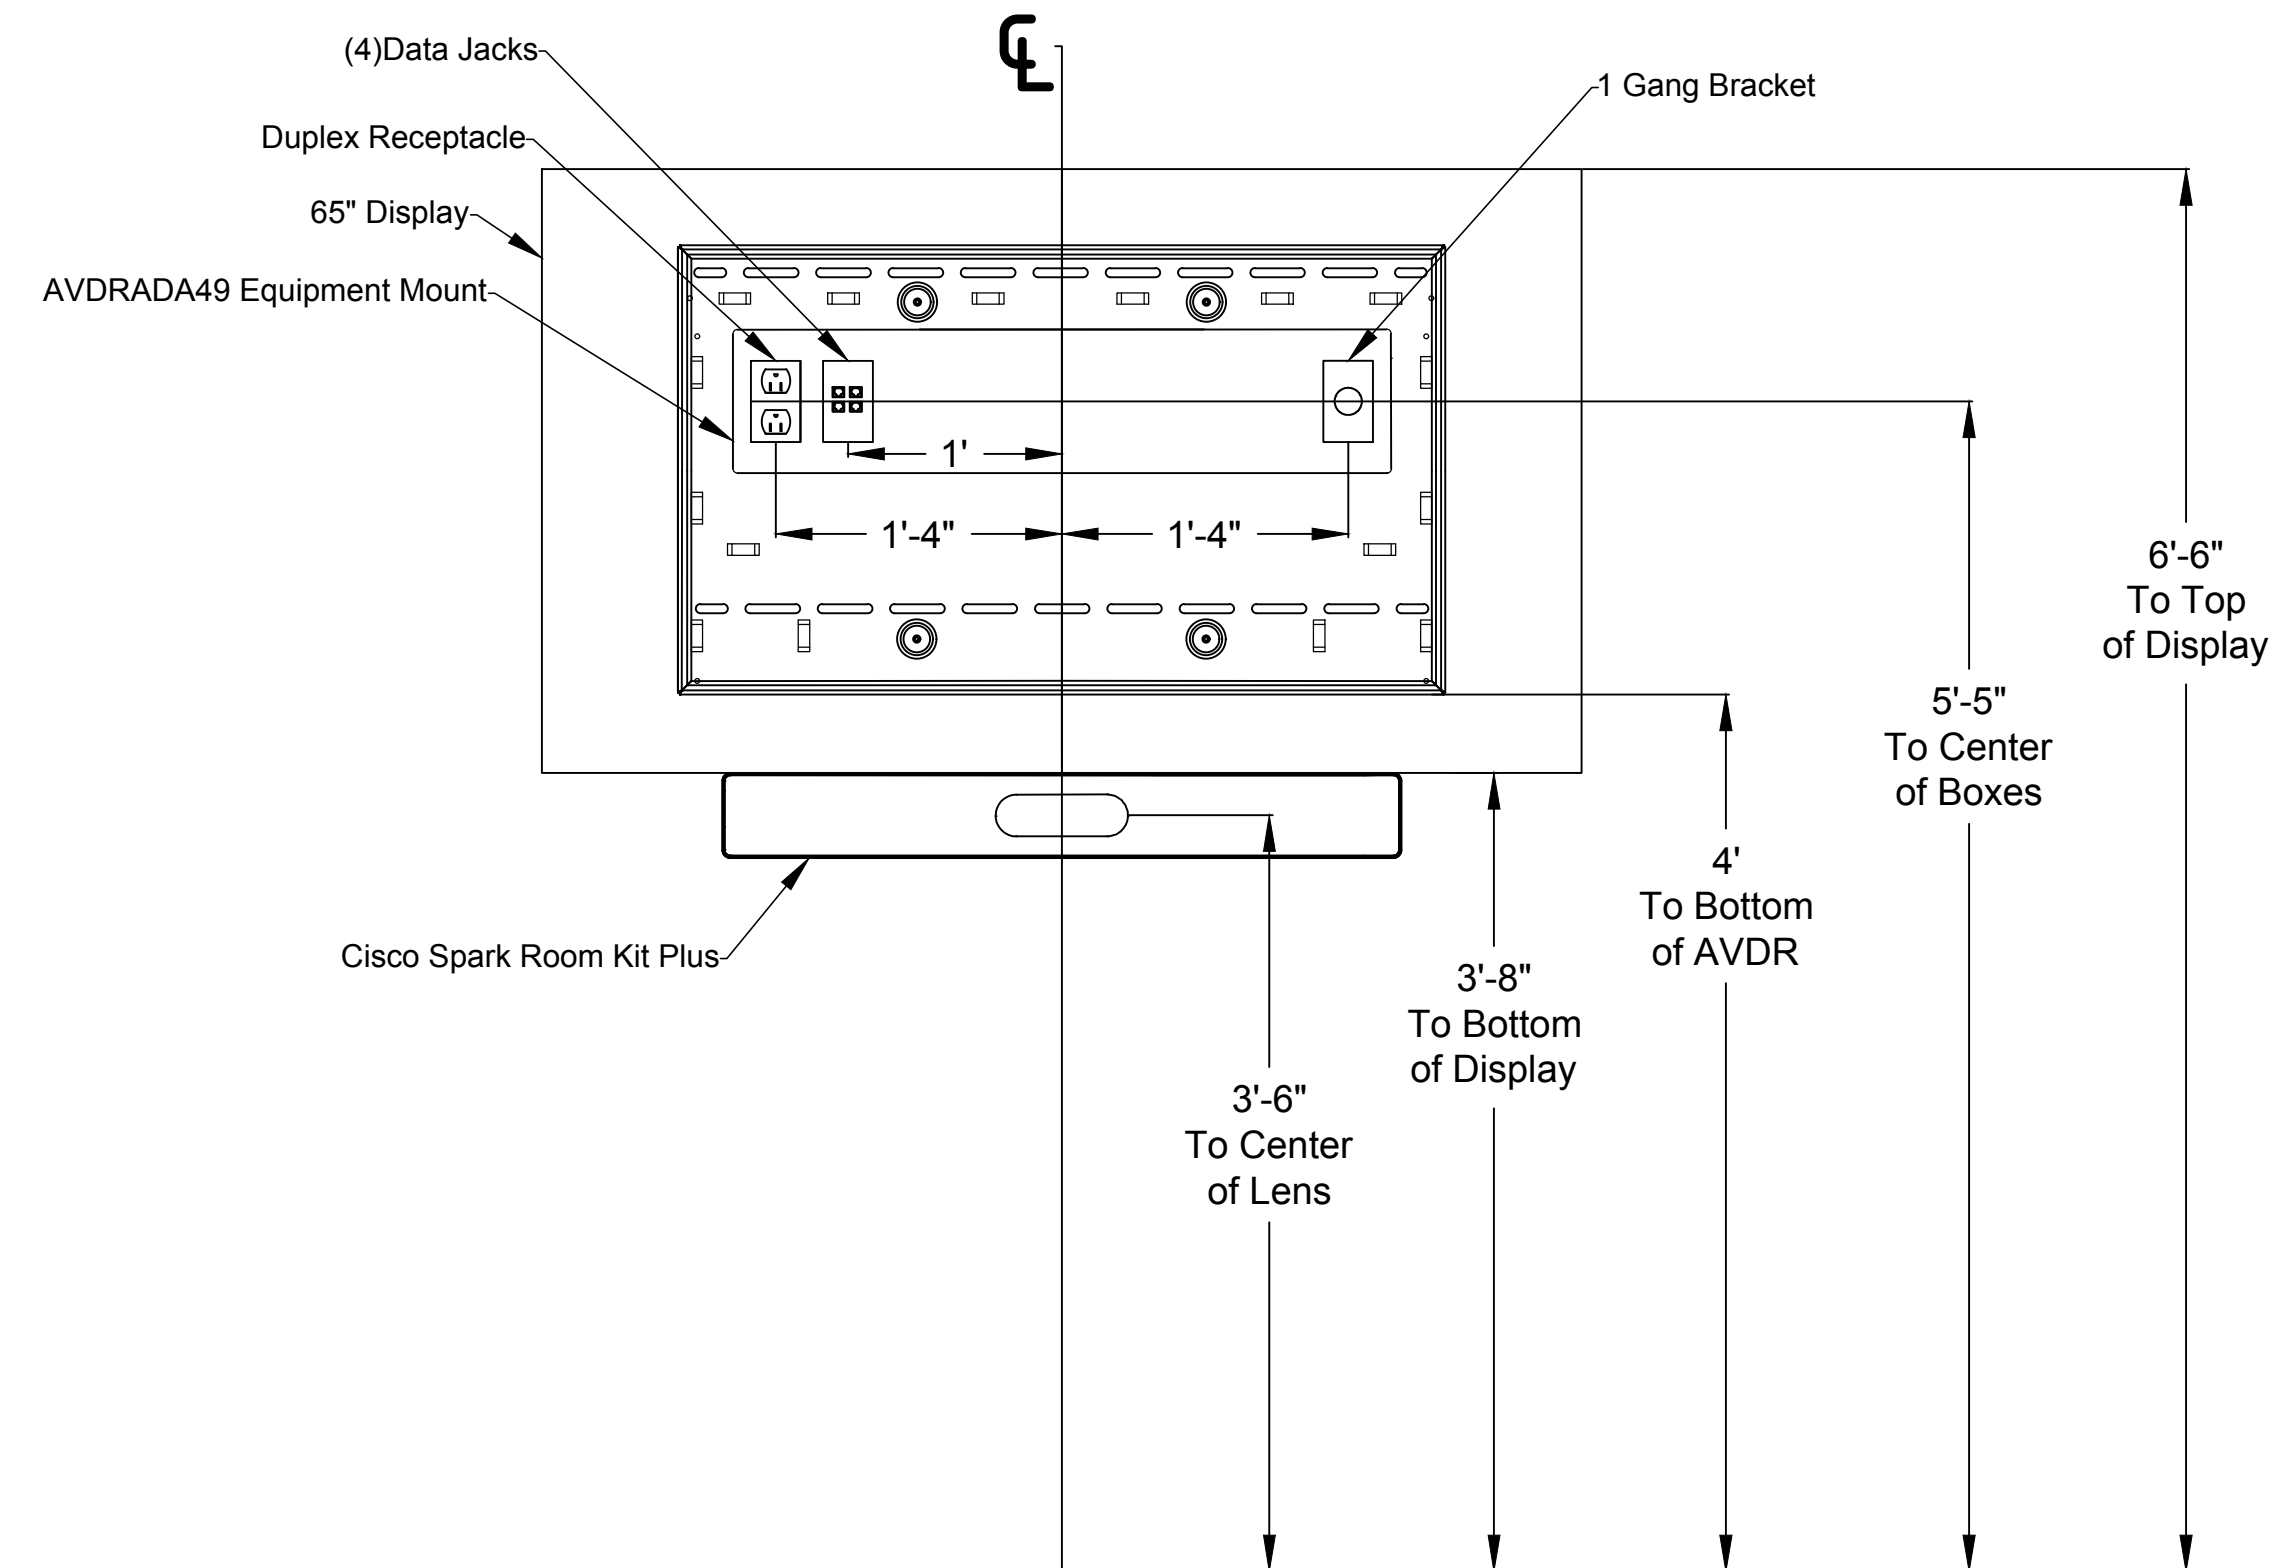

1 65" Display Elevation Diagram

- 1- CL is to be determined in the field by the customer defined Center line of the functional space in a room.
- 2- Wall must be of sufficient structural integrity to support all wall mounted equipment as defined by the AHJ.
- 3- All wall mounting hardware must be of sufficient quality and grade to safely support all wall mounted equipment.

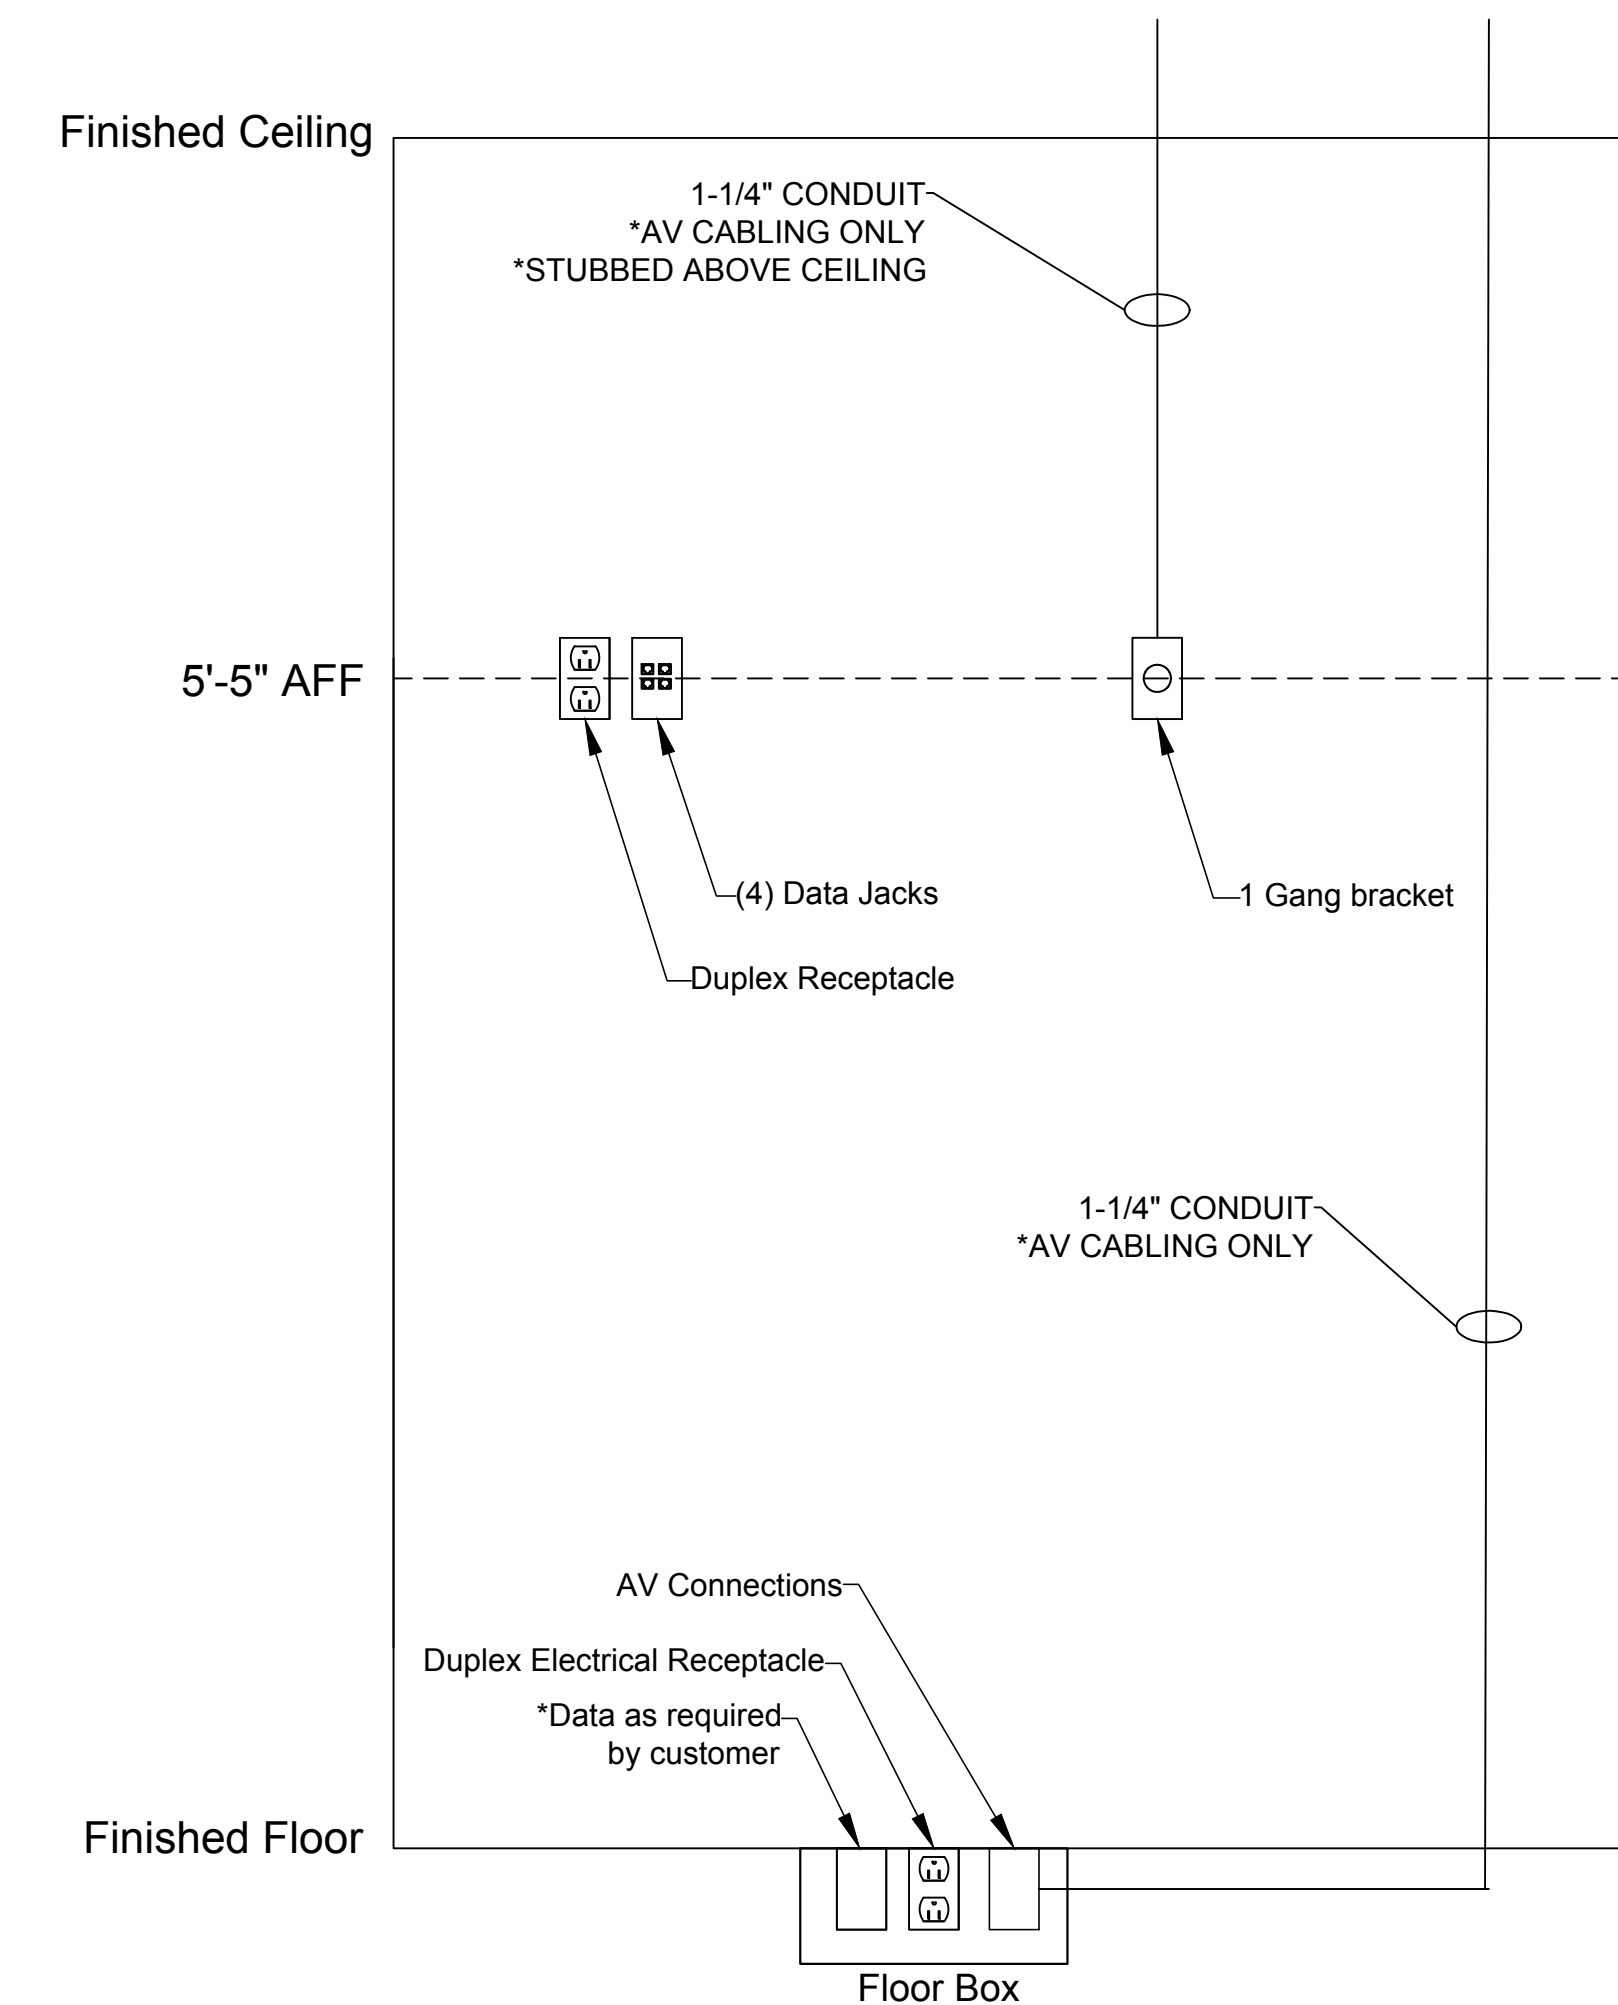

2 65" Display Riser Diagram

- 1- When ceiling mounted equipment is required, a continuous pathway must be provided from the wall mounted equipment location (within 100' of total linear pathway), to an accessible ceiling location where the ceiling mounted equipment can be installed and accessed. In the event of a retrofit scenario, wall cavities are considered accessible as long as they are accessible at top of either side of the wall.
- 2- In the event no pathway exists or can be created at a reasonable cost, surface mounted raceway is to be used in accordance with the AHJ.

Customer Information

Spark Room Kit Plus

Job Completion Date

Project Manager	TBD
Lead Installer	
Programmer	
Drawn By	JT
Approved By	
Scale	

Drawing Description

65" Display Elevation and Riser Diagram

Drawing Date	Revision
8/29/2017	

Drawing Number

AV65SB