DC Motor

FF-N30 Series

General Specifications

Ø12 mm 2.5/6.8 VDC 0.3 mNm

Customized solutions on request.

Electrical Specifications





Delal 得莱电机


Model	Voltage	No-load Current	No- Ioad Speed	Rated Current	Rated Speed	Rated Torque	Starting Torque	Starting Current
	VDC	A	rpm	A	rpm	mNm	mNm	Α
FF-N30VB-09210	2.5	0.015	5300	0.061	4200	0.2	0.8	0.23
FF-N30VB-9Z220	6.8	0.022	14200	0.13	11800	0.3	2.2	0.65

Mechanical Dimensions

DIRECTION OF ROTATION

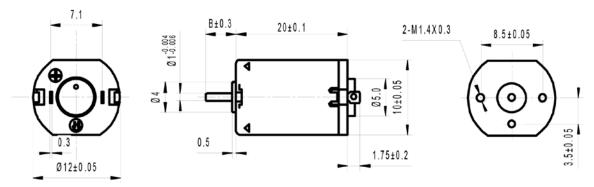







The specifications are believed to be accurate and reliable. However, the suitability has to be determined for a specific application. Specifications are subject to change without notice.