GF-9

Universal Wedge Action Tensile Grip

This self-tightening wedge grip is ideal for samples up to 25 mm (0.98 in) wide and 6 mm (1/4 in) in diameter. The gripping length is 35 mm (1.38 in). Grip features a spring force lever for quickly releasing the jaws and serrated, hardened steel faces.

Capacity

2.5 kN, 562 lbf

Packaging

Includes upper and lower grips.

Applications

Used for general purpose tensile testing.

Replacement Jaw Face Face Type


Straight Cut

Dimension 25.4 x 31.4 mm 1.00 x 1.24"

eage Action Grips

> Straight Cut Faces



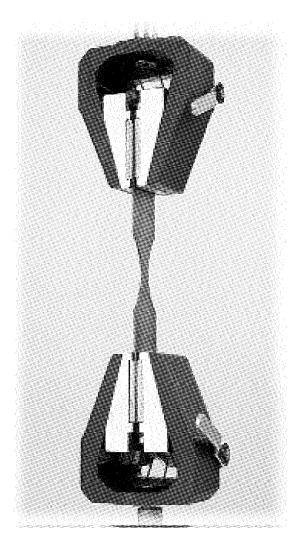

Note: The GF-9 is supplied with the following adapters for mounting to some force gauges, loadcells and test stands.

Part Number Coupling, 1/4-20F x 5/16-18F 17056 Coupling, 1/4-20F x #10-32F 17057 Adapter, 1/4-28 x 3/8-16 21046-1 Adapter, #10-32 x 3/8-16 21046-2

Note: See Grip Adapter Section (Page 105) for adapters required to fit force gauges, loadcells and test stands.

Ordering Information

Ordering In	formation	
Model	Part No.	Description
GF-9	GF-9	Universal Wedge Action Tensile Grip - 2.5 kN (562 lbf)
annangananganangana a sa a Magalangangang ang a sa Magalangangang ang kas		
nnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinni Naillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinnillinni		
		14 North Peoria St, Suite B-101 Chicago, IL 60607- Phone 312.666.0595 info@jlwinstruments.com Fax 312.733.