

PS FORCE SOCCER GUARD




ASSEMBLY INSTRUCTIONS


POWER SOCCER SHOP, INC. 11841 243 AVE. ZIMMERMAN, MN 55398 763-856-2044 x.204

POWER SOCCER SHOP.COM

2. Use clamps and two 2½" bolts to attach each side panel to the wheelchair's leg rest. The smaller holes on the side panel are for the standard clamps while the larger holes are for the stainless steel clamps. Secure with one washer and hex nut for each bolt.




- 3. Attach 1 side panel to Right Front Panel. Insert one 1½" bolt in the row of holes in the side panel to attach the guard at the correct height (2 -5 inches from the ground). Insert a second 1½" bolt into the long slot on the side panel to adjust the angle of the guard (flat front, approximately 90 degrees from the floor). Secure with one washer and hex nut for each bolt.
- 4. Attach second side panel to Left Front Panel.

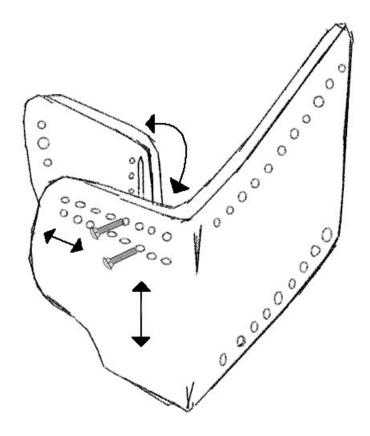

POWER SOCER



5. Select width of guard. Insert four 1½" bolts to attach Left Front Panel to Right Front Panel. Secure with one washer and hex nut for each bolt.

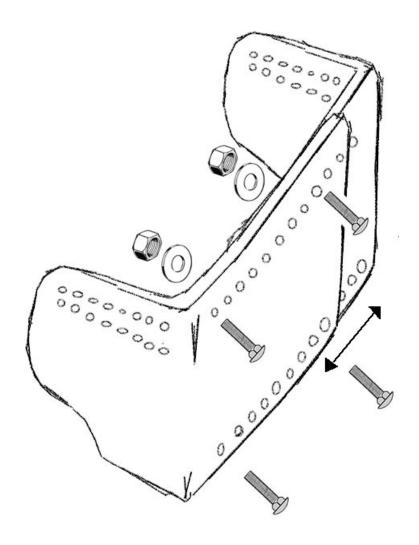

POWER SOCER SHOP.COM







