

ASSEMBLY MANUAL



4 STAR 54

KIT NO.: SIGRC44EGARFR - (red)
SIGRC44EGARFY - (yellow)




ALMOST READY TO FLY



Fly With Electric Or Glow Power!

SPECIFICATIONS:

Wing Span:	54 in.	(1372 mm)
Wing Area:	585 sq.in.	(37.7 dm ²)
Length:	47.5 in.	(1206 mm)
Flying Weight:	5 - 5.5 lbs.	(2268 - 2495 g)
Wing Loading:	19.7 - 21.7 oz./sq.ft.	(60 - 66 g/dm ²)
Radio Req.:	4-Channel with 5 Standard Servos (glow) 4-Channel with 4 Standard Servos (electric)	
Glow Power:	2-Stroke .40 - .46 cu.in. (6.5 - 7.5 cc) 4-Stroke .40 - .54 cu.in. (6.5 - 8.8 cc)	
Electric Power:	500 - 800 watt Brushless Motor (800-1000 kv) 50-75A Speed Control (ESC) 3-4S 3000-5000 mAh Lipo Battery Pack	

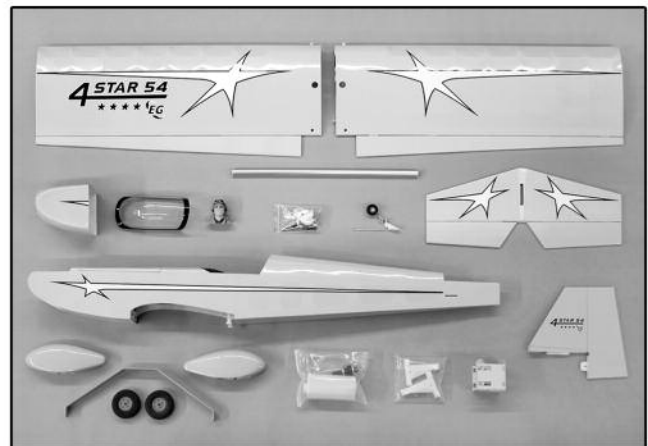

SIG MFG. CO., INC. PO Box 520 Montezuma, IA 50171-0520
www.sigmfg.com



INTRODUCTION

Congratulations on your purchase of the SIG 4-STAR 54 EG ARF. We hope you will enjoy this unique fun scale R/C model.

Assembly of your 4-STAR 54 EG ARF is fast and simple when following the detailed instructions in this manual. We urge you to read this assembly manual completely before assembly. Familiarize yourself with the parts and the assembly sequences. The successful assembly and flying of this airplane is your responsibility. If you deviate from these instructions, you may wind-up with problems later on.


Good luck with the 4-STAR. Let's get started!

ADDITIONAL ITEMS YOU WILL NEED TO PURCHASE

In addition to this kit, you will need the following items to complete your 4-STAR 54 and make it flyable.

□ RADIO SYSTEM

The Four Star 54 EG requires a standard 4-channel radio system and four to five standard size servos (number of servos depends on whether you are using glow or electric power). In addition, you'll need two 6"-12" long Servo Extension Chords (actual length needed will depend on how long the wires are coming off your servos – plan accordingly), and one Y-Harness Chord for connection of the two aileron servos to the receiver.

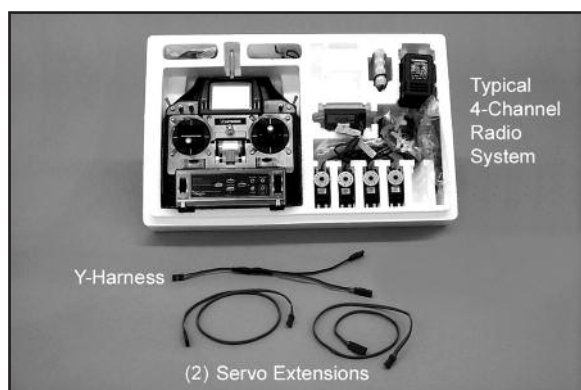

POWER SYSTEM - GLOW OR ELECTRIC?

The biggest decision you will have to make is whether to power your 4-STAR 54 with a glow engine (2-stroke or 4-stroke) or an electric motor. We have flown the 4-STAR 54 on a variety of both types of power systems, and we make the following recommendations based on our successful on-field experience.

FOR GLOW POWER

□ ENGINE

We recommend the following size engines for the 4-STAR 54.

- 2-STROKE - .40 to .46 cu. in.
- 4-STROKE - .40 to .54 cu. in.

Whatever brand engine you choose, take the time to carefully break it in according to the manufacturer's instructions. A good running, reliable engine is a minimum requirement for the enjoyment of this or any R/C model aircraft.

□ PROPELLER FOR GLOW

Refer to the engine manufacturer's instructions for recommendations on proper propeller size for their engine. In our experience, most 2-stroke .40-.46 glow engines will fly the 4-STAR 54 very nicely with a 10x6 prop.


FOR ELECTRIC POWER

□ 500 - 800 watt BRUSHLESS OUTRUNNER MOTOR

The 4-STAR 54 is designed to be powered with a 500 to 800 watt electric brushless outrunner motor. This size motor is sometimes referred to as a "32" or "40" class motor to those who like to make a comparison to a glow motor. Also, the motor you choose should be rated at 800-1000 kv, in order to turn an appropriate propeller.

Here is are some motor sizes that work well in the 4-STAR 54:

- 4250-800**
- 4250-770**
- 4248-800**
- 3554-800**

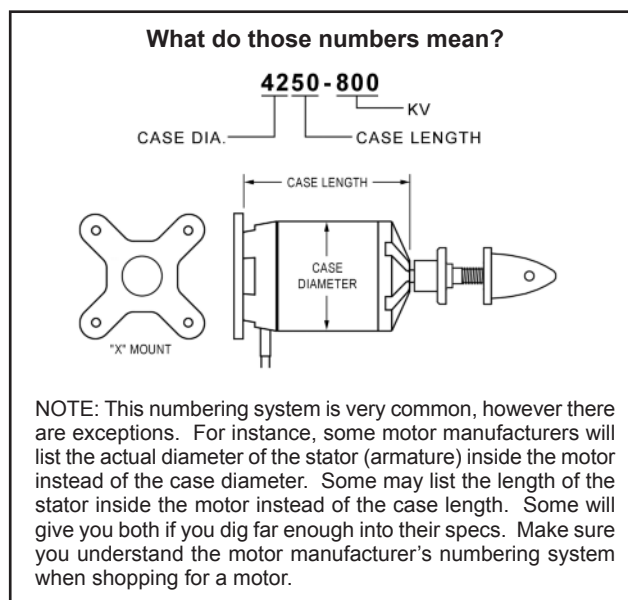

□ MOTOR MOUNT

A laser-cut plywood adjustable motor mount is included in this kit. It should work perfectly for any suitable brushless outrunner motor which has an "X" or "cross" motor mount plate on the back.

□ 60-75 amp ESC (Electronic Speed Control)

We used a Castle Creations 75 amp ESC in our 4-STAR 54 prototypes. This is an excellent "switching type" ESC that has a built-in 5amp BEC that is safe to use with a 4 cell lipo battery pack.

Important Note: BEC (Battery Eliminator Circuit) allows you to use the same battery pack to power both your motor and your radio system, eliminating the normal radio battery pack. When the single battery pack runs down in flight to a prescribed point, the BEC circuit in the ESC will shut down the motor and leave enough power to operate the radio while you land the model. Note that the BEC feature in some ESCs does not work with 4 cell and larger lipo battery packs - only 3 cell packs. Check the manual of your particular ESC to learn if this is true in your case. If your BEC is only rated for 3 cells, you have three options: 1) fly only 3 cell lipo packs (and have lower power); or 2) disable the BEC and install a normal receiver battery pack to run the radio full time; or 3) install an aftermarket BEC that is properly rated for your setup

❑ 3 or 4 cell 3000-5000 mah LIPO BATTERY PACK

You can fly your 4-STAR 54 with a 3 cell (3S1P) or 4 cell (4S1P) Lipo pack. Pack capacity should be 3000-5000 mah for good flight duration. A 3 cell pack (11.1 volts) provides good flight performance with mild aerobatic capability. A 4 cell pack (14.8 volts) provides more power with outstanding aerobatic performance.

CAUTION: You must match your propeller size to the cell count of your lipo pack, to avoid drawing too many amps and damaging your ESC or motor.

❑ PROPELLER

With electric powered models there are many factors that have a bearing on what propeller to use. The best place to start answering that question is in the instructions that come with your motor. Another fine source of information is one of the electric flight calculators that are available for you to use free online (there is a good one on Castle Creations web site).

OUR FLIGHT TEST REPORT

After extensive test flying, our favorite setup for the 4-STAR 54 is a 4250 (case dimensions) 770 kv brushless motor, with a 75 amp ESC, 4S lipo battery pack, and an APC 13 x6.5 E propeller. This combination gave outstanding flight performance. When using a 4S 3000 mah lipo, we had flight times around 6-8 minutes, depending of course on throttle management. Your results may vary. For more flight time use a larger pack. Prop size, size and quality of the battery pack, throttle management, air temperature, etc., all have a bearing on electric flight performance and flight time. Experiment to find the best combination for your setup.

❑ BATTERY CHARGER

FOR SAFETY AS WELL AS PERFORMANCE, CHARGE LIPO BATTERIES ONLY WITH A LIPO BATTERY CHARGER!

In addition to providing the critical charging profile needed to safely charge lipo batteries, a lipo battery charger also includes the capability of "balancing" the available voltage in the cells, ensuring that the battery pack is at peak capacity at the end of the charge cycle. This translates to better flight times and a longer life from the battery pack.

REQUIRED TOOLS

For proper assembly, we suggest you have the following tools and materials available:

A selection of glues - SIG Thin, Medium, & Thick CA Glue
CA Accelerator, CA Debonder
SIG Kwik-Set 5-Minute Epoxy

Screwdriver Assortment

Pliers - Needle Nose & Flat Nose

Diagonal Wire Cutters

Small Allen Wrench Assortment

Pin Vise for Small Dia. Drill Bits

Hobby Knife with Sharp #11 Blades

Small Power Drill With Selection of Bits

Dremel® Tool With Selection of Sanding & Grinding Bits

Scissors

Sandpaper

Covering Iron & Trim Seal Tool

Masking Tape, Paper Towels

Alcohol and/or Acetone For Epoxy Clean-up

COMPLETE KIT PARTS LIST

The following is a complete list of all parts contained in this kit. Before beginning assembly, we suggest that you take the time to inventory the parts in your kit. Use the check-off boxes ❑ provided in front of each part description. Please also note that the bolts and nuts required to mount a glow engine to the engine mounts are not included and must be purchased separately.

- ❑ (1) Fuselage
- ❑ (1) Right Wing Panel & Aileron, hinges not glued

- ❑ (1) Left Wing Panel & Aileron, hinges not glued
- ❑ (1) Aluminum Tube Main Wing Joiner
- ❑ (1) Horizontal Stabilizer & Elevator, hinges not glued
- ❑ (1) Vertical Fin & Rudder, hinges not glued
- ❑ (1) Fiberglass Cowling
- ❑ (4) M3 x 10mm Sheet Metal Screws, for cowl mounting
- ❑ (1) Clear Plastic Canopy
- ❑ (1) Pilot figure

Main Landing Gear

- ❑ (1) Aluminum Main Landing Gear
- ❑ (1) Right Fiberglass Wheel Pant
- ❑ (1) Left Fiberglass Wheel Pant
- ❑ (4) M3 x 12mm Socket-Head Bolts, for wheel pants
- ❑ (3) M4 x 20mm Socket-Head Bolts, for main gear
- ❑ (3) M4 Split-Ring Lock Washers
- ❑ (2) 4mm dia. Threaded Axles
- ❑ (2) 5mm Hex Nuts; for axles
- ❑ (4) 4mm ID Wheels Collars; for axles
- ❑ (2) 2-1/2" dia. Main Wheels

Tailwheel Assembly

- ❑ (1) Tailwheel Assembly, with wheel, Formed Wire, Nylon Bearing, Wheel Collars(2)
- ❑ (1) Nylon Rudder Steering Control Clasp, with M2 x 15mm Bolt and M2 Hex Nut
- ❑ (2) M3 x 12mm Sheet Metal Screws

Electric Motor Mount

- ❑ (1) Plywood Electric Motor Mount Assembly
- ❑ (1) Balsa Triangle Stock; for motor mount reinforcement
- ❑ (4) M4 x 20mm Socket-Head Mounting Bolts
- ❑ (4) M4 Flat Washers
- ❑ (4) M4 x 16mm Socket-Head Mounting Bolts
- ❑ (4) M4 Split-Ring Lock Washers
- ❑ (4) M4 Blind Nuts

Glow Engine Mounts, Fuel Tank, Throttle Pushrod


- ❑ (2) Nylon Engine Mounts; for glow engines
- ❑ (4) M4 x 20mm Mounting Bolts, for motor mount to firewall
- ❑ (4) M4 Flat Metal Washers, for motor mount to firewall
- ❑ (1) Fuel Tank
- ❑ (1) Rubber Stopper Assembly
- ❑ (1) Fuel Pick-Up Weight (clunk)
- ❑ (1) Fuel Line Tubing, for inside tank
- ❑ (1) Metal Pushrod Keeper with Set Screw
- ❑ (2) Hex Nuts for throttle servo connector
- ❑ (1) Plywood Fuel Tank Support
- ❑ (1) small Balsa Block; for fuel tank stop

Misc.

- ❑ (2) M6.5 x 45 mm Nylon Wing Bolts
- ❑ (4) Nylon Control Horns; for ail(2), ele(1), rud(1)
- ❑ (12) M2 x 12mm Screws; for control horns
- ❑ (4) Metal RC Clevis; for ail(2), ele(1), rud(1)
- ❑ (4) Small pieces of Fuel Tubing; for R/C clevis keepers
- ❑ (4) Pushrod Snap Keepers; for ail(2), ele(1), rud(1)
- ❑ (2) Plastic Cinch Straps
- ❑ (2) Hook-&-Loop (Velcro®) Straps
- ❑ (1) Strip of Covering Material

Pushrods

- ❑ (2) 28" long Wire Pushrods, threaded on one end, including M2 Hex Nuts(2); for elevator & rudder
- ❑ (2) 7" long Wire Pushrods, threaded on one end, including M2 Hex Nuts(2); for ailerons
- ❑ (1) 18.25" long Wire Pushrod, with Z-bend one end; for throttle
- ❑ (1) Nylon Pushrod Tube, for throttle



COVERING MATERIAL

Your 4-STAR 54 is covered with ORACOVER®, a premium quality covering made in Germany, and sold in the U.S. by Hanger-9 as Ultracote®.

Colors Used On Your Airplane

ORACOVER® #30 Cub Yellow (Ultracote® # HANU884)

or

ORACOVER® #23 Ferrari Red (Ultracote® #HANU866)

If sometime in the future you need replacement covering or matching paint for repairs, they are available from your local hobby dealer or online from Hanger-9.

How To Tighten Loose Covering

After you open your 4-STAR 54 and take all the covered parts out of their plastic bags, the covering may begin to wrinkle. This is not unusual and is no cause for alarm. Your airplane was built and covered in a part of the world which has relatively high humidity and therefore, the wood was likely carrying a fair amount of moisture. When exposed to drier air, the wood typically loses this moisture, dimensionally "shrinking" in the process. In turn, this may cause some wrinkles. However, wrinkles are easy to remove by just using a hobby type heat iron.

Caution: Trying to remove the wrinkles by hastily going over them with a heat gun can lead to more problems. You should take your time to carefully go over the entire model with a covering iron, as we will describe.



We suggest using a model airplane covering iron for this process. Cover the iron's shoe with a thin cotton cloth, such as an old t-shirt, to prevent scratching the covering as you work.

After covering your iron, the next step is to set the iron to the correct temperature. This is critical for achieving a good result! The iron should be set to about **220°F - 250°F (104°C - 121°C)** as measured on the bottom of the iron using a thermometer.

If you do not have a thermometer, you can find the correct temperature by trial and error. Set your iron to a medium setting. Glide the iron over some of the covering that is over solid wood, such as the sheeted wing center section. Observe the covering to see if any bubbles appear. If bubbles appear, the covering is getting too hot! Turn down the temperature of the iron and repeat the test.

If no bubbles appear, turn up the heat slightly and repeat the test. Keep adjusting until you "zero in" on the correct temperature. Find the temperature that will get the covering to stick down without forming bubbles or causing the seams to pull away.

Once your iron is set to the correct temperature, go over the entire framework of the airplane, making sure that the covering is securely bonded to the structure everywhere the covering comes in contact with the wood underneath. This takes some time, but is worth the effort.



After you have all the covering secured onto the solid areas, turn the temperature of the iron up to approximately **300°F - 320°F (149°C - 160°C)**. This is the correct temperature for shrinking the covering material.

Use the iron to tighten up any wrinkles in the "open" areas of the model (no wood underneath the covering). Glide the iron over the wrinkle for a few seconds, then remove. Repeat until the covering is tight with no wrinkles.

If wrinkles keep coming back on the tail surfaces, you may need to "ventilate" the areas between the ribs. Otherwise the air that is sealed in those relatively small areas will expand when the heat is applied and actually cause the covering to stretch instead of shrink. Use a pin to poke a tiny hole in the covering between each rib, on the bottom of the part. That will let the expanding air escape and the covering to shrink properly.

Caution When Using Heat Guns: You can also use a hobby-type heat gun to shrink the covering, but you must be careful around seams or color joints. Getting too much heat on the seams may cause them to "creep" or come loose. You must also be careful when using a heat gun when working around the windshield and side windows - heat will distort the clear plastic material.

Recommended Temperatures:

To adhere the covering - 220°F - 250°F (104°C - 121°C)

To shrink the covering - 300°F - 320°F (149°C - 160°C)

NOTE: In this manual, any references to right or left, refer to your right or left as if you were seated in the cockpit of the airplane.

WING ASSEMBLY

The wings are designed as a 2-piece system, with separate right and left wing panels joined by an aluminum tube wing joiner and a hardwood locating pin at the rear. Due to the high strength of the wing joiner tube, the wing panels do not need to be permanently glued together. Gluing them permanently together is optional - your call. The obvious benefit to leaving the wing panels separate is the fact that they can be easily transported or stored, requiring a minimum of space.

To help protect your wings during the following steps we recommend that you cover your work surface with a soft cloth or piece of foam.

INSTALLING THE AILERON SERVOS

For the following steps you will need:

- (1) Right Wing Panel
- (1) Left Wing Panel
- (1) Aluminum Tube Wing Joiner
- (2) Servos with Mounting Screws (not furnished)
- (2) 6"-12" Servo Extension Chords (not furnished)
- (1) Servo Y- Harness (not furnished)


□ 1) Mount the aileron servos in the bottom of each wing panel.

a) The servo bays are precut for you but you'll want to double check the covering around the cutout to make sure it is sealed down tight.

b) Install the rubber grommets and brass eyelets (supplied with your radio system) into each aileron servo.


c) Install the control arms on the two aileron servos. The arms should be at 90 degrees to the servo when the aileron control stick on the transmitter is in neutral and the transmitter trims are in neutral as well.

d) Before installing the aileron servos in the wing panels you must attach a servo extension chord to the aileron servo wire. The typical combined length required is approximately 15". A 6" or 12" long extension chord will be needed, depending on how long the chord on the servo is. Plug the servo plug into the extension chord and tape the plugs together for added security.

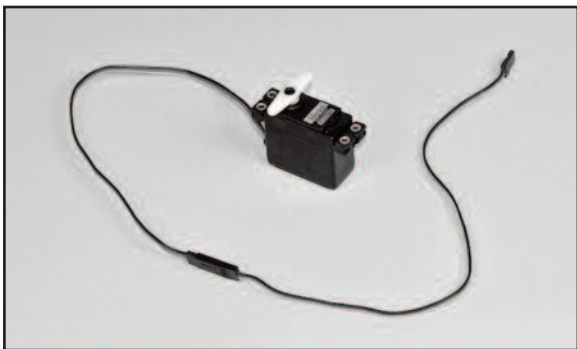

e) Holding the wing panel with the wingtip UP, drop the end of the extension chord into the servo mount cutout and then thru the openings in the wing ribs, working it towards to the center end of the wing panel. The plug on the end of the extension chord will occasionally get hung up on the ribs, however by turning or gently shaking the wing panel you can get it to fall through the openings in the ribs, until it emerges at the end rib. Once you've got the plug to the end rib, direct it through the round hole in the bottom surface of the wing panel. By that time, the servo itself should be next to the servo mount cutout and ready for mounting.


f) Fit the servo into the servo mount in the wing panel, (note that the servo is positioned so that the servo arm is at the forward end toward the wing leading edge). Take up any slack in the servo chord as you insert the servo in the mount. Use a pin vise and a small drill bit to drill small pilot holes in the servo mount for the servo mounting screws. Use the screws supplied with your radio system to mount the servo in place on the servo mount. Repeat this procedure to mount the servo in the opposite wing panel.

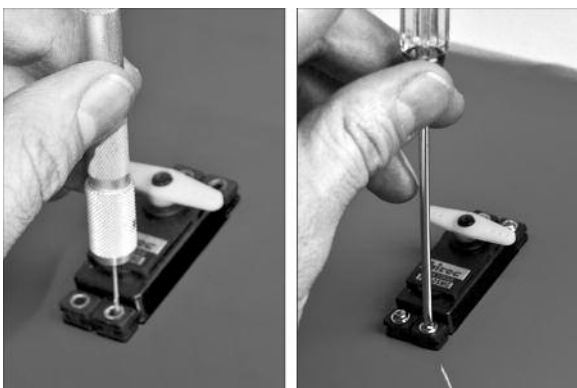

HINGING THE AILERONS

□ 2) Note that the CA Hinges are installed, but not yet glued, in the ailerons and wing panels. The installation process for the hinges is the same for all of the control surfaces on this model.

a) If you removed the ailerons and hinges from the wing panels when you tightened the covering material, reinstall them now. First insert the five CA Hinges into the slots in the aileron. Put two pins in the center of each hinge, up against the leading edge of the aileron, to keep the hinges centered during the next step.

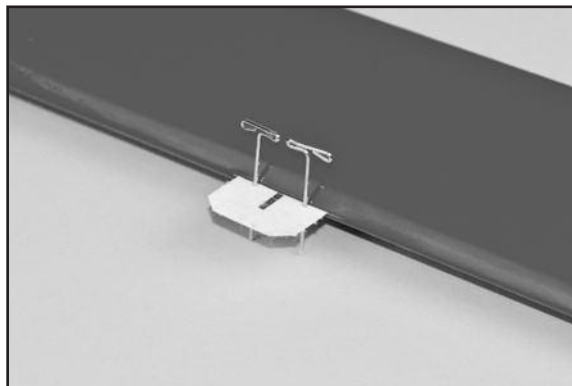

b) Now carefully insert the exposed portion of the five hinges into the trailing edge of the wing. You will find it easiest to slide the hinges into the slots at angle, one hinge at a time, instead of trying to push it straight onto all the hinges at once.

c) Adjust the aileron so that the tip of the aileron is flush with the wing tip. The ailerons should be tight against the pins in the hinges to minimize the gap between the wing and the aileron. The aileron is now in the proper position for permanently gluing them in place with thin CA glue.

d) Flex the aileron down and hold it in this position. Remove the pins from one hinge and then carefully apply 3-4 drops of Thin CA glue directly onto the hinge in the gap. You will notice that the glue is quickly wicked into the slot as it penetrates both the wood and the hinge. We suggest using a fine tipped applicator on the glue bottle to better control the flow of glue.



e) Turn the part over and glue the other side of the hinge. Continue this process until you have glued both sides of all the hinges! Keep a rag handy to wipe off any excess Thin CA glue. (If you get some glue smears on the plastic covering, don't worry about them right now. Once all the hinging is done, you can clean the smears off the covering with CA Debonder).


f) Let the glue dry 10-15 minutes before flexing the hinges. At first you might notice a little stiffness in the joint. This will go away after the hinges have been flexed back and forth a couple dozen times.

INSTALL AILERON CONTROL HORNS & PUSHRODS

From the kit contents locate:

- (2) Nylon Control Horns
- (6) M2 x 12 mm Screws
- (2) 7" long Pushrod Wires with M2 Hex Nut
- (2) Metal R/C Clevis
- (2) Pushrod Snap Keepers
- (2) small pieces of Fuel Tubing

□ 3) Look closely and you will see three holes pre-drilled in the bottom of the ailerons for mounting the nylon control horns. Screw the control horn in position on the bottom of the aileron using three M2 x 14mm screws.

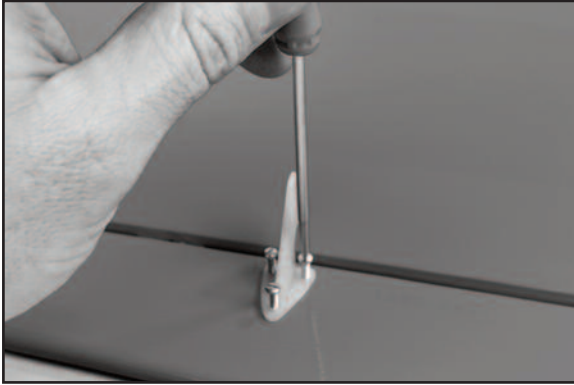


When the tips of the screws begin to emerge at the top surface of the aileron, add the control horn's nylon retaining plate. The aileron will be sandwiched between the control horn on the bottom and the retaining plate on the top. Continue turning in the screws until the horn and retaining plate are snug against both surfaces of the aileron. Do not over tighten the screws and crush the wood.


The excess length of the screws that is extending past the retaining plate can be cut off with a pair of side cutting pliers or ground down with a rotary tool with a cutoff disc.

□ 4) Next assemble and install the aileron pushrods.

a) Slide a short piece of Fuel Tubing onto the small end of the Metal R/C Clevis. Screw the Hex Nut on the Aileron Pushrod Wire all the way up to the end of the threads. Then screw the metal clevis halfway onto the threaded end of the Aileron Pushrod Wire.

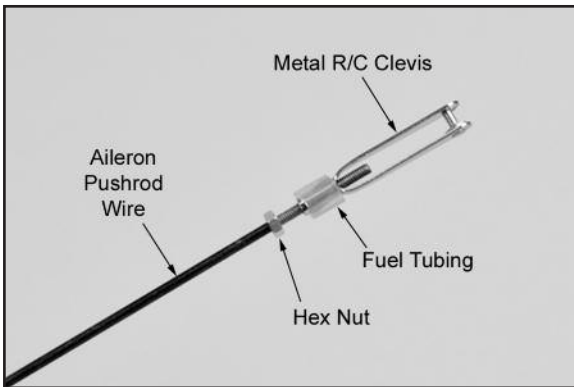


b) Clip the metal clevis into the last hole in the nylon control horn. Lay the other end of the pushrod wire over the outer hole in the servo arm. Use a felt tip pen to mark the wire where it crosses the hole. Use a pair of pliers to put a sharp 90-degree bend in the wire at the mark.

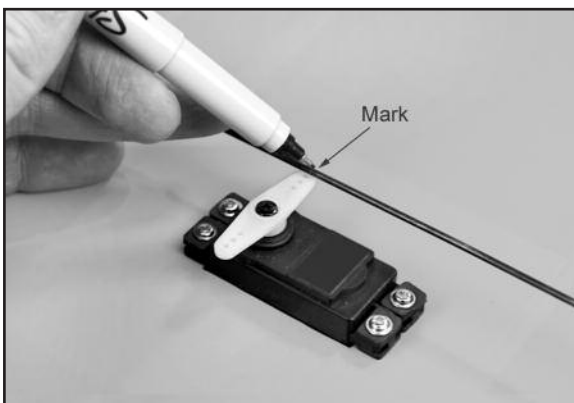

c) Insert the bent end of the pushrod into the servo arm, from the top. Note: You will most likely need to use a 1/16" dia. drill to open the hole in the servo arm to accept the pushrod wire.

d) Mark and cut off the excess end of the pushrod wire, leaving 1/8" of wire protruding below the bottom of the servo arm.

e) Clip a Nylon Snap Keeper in place on the servo end of the pushrod wire. Snap the free end of the keeper up and over the protruding end of the pushrod wire, underneath the servo arm.

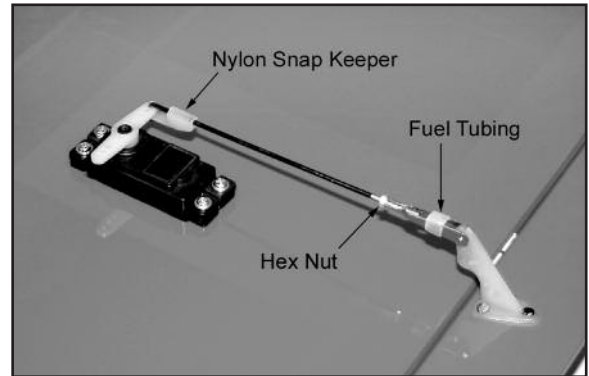


f) Check that the aileron servo is in neutral position and adjust the metal clevis as needed to get the aileron in neutral position.

VERY IMPORTANT

CORRECT NEUTRAL POSITION FOR 4-STAR AILERONS

Adjusting the neutral position of the ailerons of the 4-STAR is a bit different than most models, due to the 4-STAR unique airfoil shape. The 4-STAR airfoil is flat on the bottom from the main spar back to the trailing edge of the wing panel. DO NOT line the aileron up with this flat bottom portion of the airfoil. That would set the both ailerons too high and be detrimental to the flight characteristics of the airplane.

The center line of the ailerons must be lined up with the center line of the airfoil, as shown in this drawing.

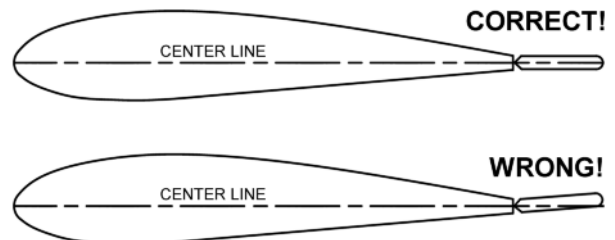

g) Once the ailerons are properly adjusted, insure that the metal clevis can't open up and come loose from the control horn by sliding the piece of Fuel Tubing over the arms of the clevis. Also tighten the M2 Hex Nut up against the back of the clevis.

FUSELAGE ASSEMBLY

INSTALL THE MAIN LANDING GEAR


Locate the following parts from the kit contents:

- (1) Fuselage
- (2) Aluminum Main Landing Gear
- (3) M4 x 20mm Socket-Head Bolts, for main gear
- (3) M4 Washers, for main gear
- (2) 2-1/2" dia. Main Wheels
- (2) 4mm dia. Threaded Axles
- (4) 5mm Hex Nuts; for axles
- (4) 4mm ID Wheels Collars; for axles
- (1) Right Fiberglass Wheel Pant


- (1) Left Fiberglass Wheel Pant
- (4) M3 x 12mm Socket-Head Bolts, for wheel pants

NOTE: We suggest you use a thread locking liquid (like Loctite®) on all bolts and nuts used in the assembly of the landing gear.

□ 5) Install a Threaded Axle into the large hole of the landing gear leg, with the plain end of the axle shaft pointing to the outside. Secure the axle with a 5mm Hex Nut on each side of the gear leg. When tightening the nuts, keep the flats of the nut on the axle side of the gear leg parallel to the front edge of the leg - see photo. This allows the hex nut to fit inside the narrow notch in the wheel pants when they are added later.

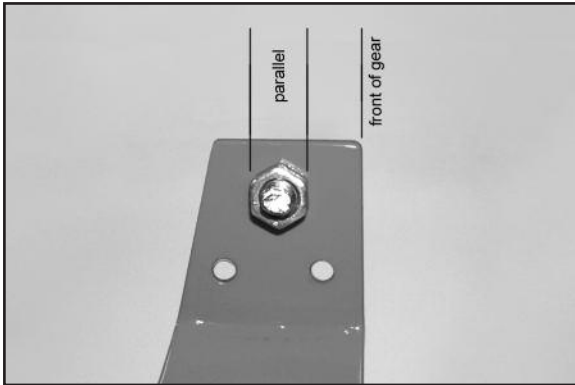

□ 6) Slide a 4mm Wheel Collar onto the axle shaft, but leave approximately 1/8" of space between it and the nut, to provide proper spacing of the wheel in the wheel pant. Tighten the wheel collar set screw securely.

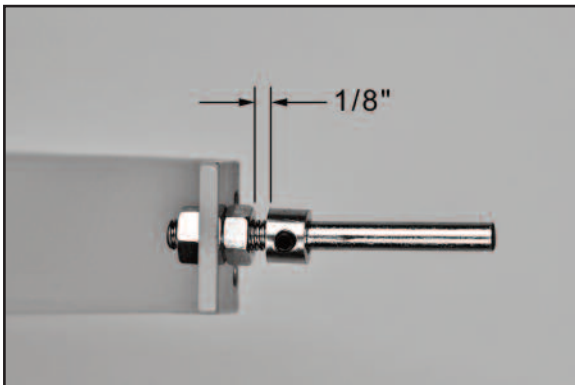

□ 7) Slide the wheel on the axle and test to make sure it spins freely on the axle. Next slide one of the Main Wheels onto the axle and test to make sure it spins freely. If it does not turn freely, drill out the plastic hub of the wheel with an 11/64" or #17 drill bit.

□ 8) Slide a second wheel collar onto the axle and up to the wheel. Leave a small gap between it and the wheel, so the wheel will turn freely, and then tighten the wheel collar set screw.




□ 9) Check the orientation of the landing gear to make sure you

know which way is forward. The two outer holes for mounting the gear to the fuselage go to the front. Then test fit the wheel pants over the wheels and line up the predrilled mounting holes. Secure the wheel pants in place with two M3 x 12mm socket head bolts for each pant.



□ 10) Bolt the main landing gear onto the fuselage using three M4 x 20mm Socket-Head Bolts and three M4 Washers.

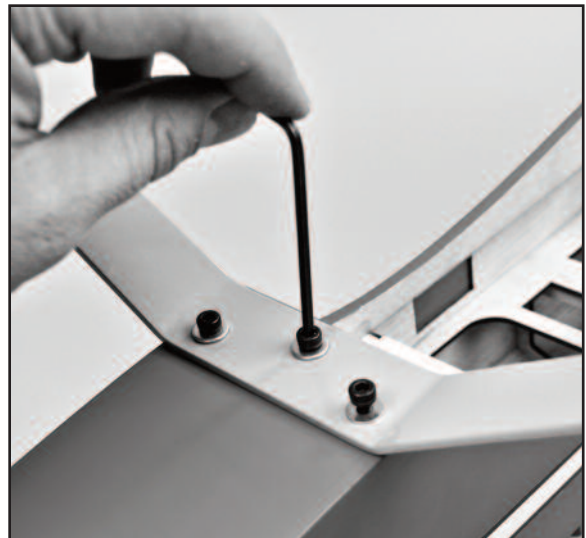


TAIL SURFACE & TAILWHEEL INSTALLATION

For the following steps you will need:

- (1) Fuselage
- (1) Wing
- (1) Stabilizer & Elevator set
- (1) Vertical Fin & Rudder Set
- (2) M6.5 Nylon Wing Bolts
- (1) Tailwheel assembly, including Wheel and Wheel Collars
- (2) M3 x 12mm Screws
- (1) Nylon Rudder Steering Clasp with Bolt and Hex Nut
- (2) Nylon Control Horns
- (6) M2 x 14mm Sheet Metal Screws

□ 11) Remove the elevator and hinges from the horizontal stab and set them aside for now. Test fit the stabilizer on the fuselage. Notice that the covering has been removed from both the fuselage and horizontal stabilizer where they will mate together. Eyeball the location of the horizontal stabilizer and pin it in place.

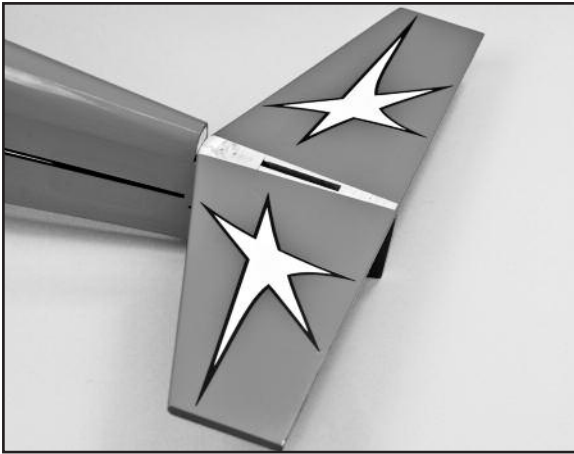


□ 12) Bolt the wing in place on the fuselage with the Nylon Wing Bolts provided. Carefully check the alignment of the stabilizer to the wing.

a) First view the model from directly in front. Check to see if the stabilizer is level with the wing. You should find it to be very close. If necessary use a sanding block to fine tune the stabilizer platform to level the stabilizer to the wing.

b) Next use a tape measure to measure the distance from each stab tip to the back edge of the wing - the distance should be equal on both sides. Adjust if necessary.

c) Mark the front and rear of the stabilizer with a felt pen for alignment guides. You can now remove the pins and lift up the stabilizer for gluing.

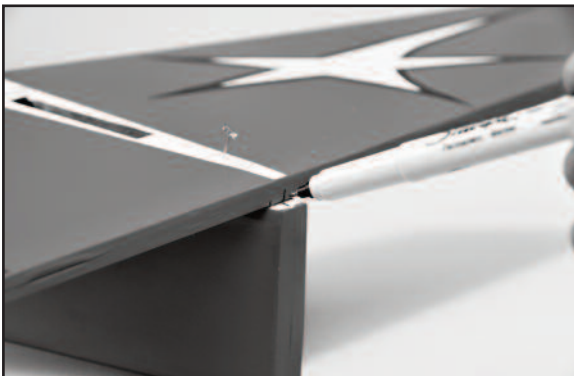

□ 13) The horizontal stabilizer is now glued in place into the rear of the fuselage. We suggest using slow drying epoxy glue for this job to allow time to position the stab accurately and make any final adjustments that might be needed. Apply the glue to both sides and reset the stab in place. Use pins to hold it in place. Re-check the alignment. Wipe away any excess epoxy with rubbing alcohol and a soft paper towel. Allow the glue to dry completely.

□ 14) Pull the Fin and Rudder apart set the rudder and hinges aside for now. Test fit the fin in place on top of the stabilizer. Check to see that the fin sits flush and perpendicular to the stabilizer. When satisfied with the fit, glue the fin in place using slow



drying epoxy glue. Apply a thin coat of glue to the bottom of the fin and to the exposed wood on the stab. With the fin in place, sight the model from the front to make sure the fin is absolutely 90 degrees upright to the stab. If needed, use a little masking tape to hold it in alignment. Wipe off any excess glue rubbing alcohol and a soft paper towel.

□ 15) Just like the aileron hinges, the elevator hinges are factory installed, but not yet glued. Hinge the elevator assembly to the stabilizer, using the same techniques you did for the ailerons on page 5 of this manual. Let the hinges dry before flexing them.



□ 16) The rudder is now hinged to the fin and to the rear of the fuselage using the same techniques you did for the other hinges. Make sure to line up the top of the rudder flush with the top of the fin. This will ensure the tail wheel bracket lines up correctly. Let the hinges dry adequately before proceeding.




□ 17) Mount the Tailwheel assembly in place on the lower rear end of the fuselage, using two M3 x 12mm screws. Note that there are two pilot holes already in the fuselage for the screws.

□ 18) Adjust the wheel collar shown to set the height of the tailwheel wire. Then check to see if the long steering leg of the tailwheel wire is parallel to the bottom of the rudder. The wire may need to be tweaked slightly to make it parallel.




□ 19) Slide the Nylon Rudder Steering Clasp onto the bottom of the rudder and onto the tailwheel wire at the same time. Locate

the clasp at the halfway point on the wire, and then drill a hole for the M2 x 15mm Bolt. Insert the bolt through the hole and tighten down the M2 Hex Nut to clamp the bracket in place.

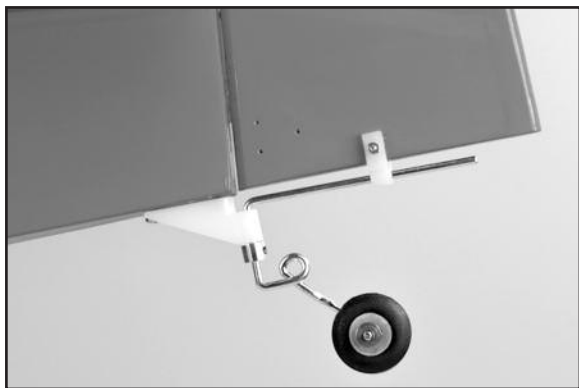

□ 20) Look closely and you will find three holes pre-drilled near the bottom of the rudder for mounting a nylon control horn. Install the control horn on the left side of the rudder, with the retaining plate on the right, using three M2 x 12mm screws.

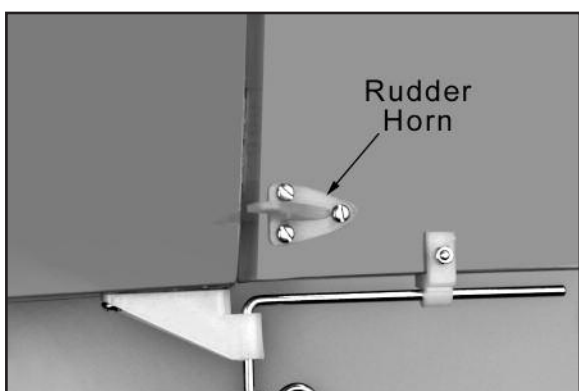

□ 21) Look closely and you will find three holes pre-drilled in one of the elevators for mounting a nylon control horn. Screw the control horn in position on the bottom of the right elevator using three M2 x 12mm screws.




ELEVATOR & RUDDER CONTROLS

For this section you will need:

- (1) Fuselage Assembly
- (2) 28" long Wire Pushrods with M2 Hex Nut
- (2) Metal RC Clevis
- (2) small pieces of Fuel Tubing
- (2) Pushrod Snap Keepers
- (1) Radio Receiver (not furnished)
- (2) Servos with Mounting Screws (not furnished)

□ 22) Install the rudder and elevator servos inside the fuselage in the built-in plywood radio mounting tray. Note that the rudder servo goes on the right side of the airplane, and the elevator servo goes on the left side. (The servo opening in front is for the throttle

servo in a glow installation.) Be sure to drill pilot holes through the plywood tray for the mounting servo mounting screws.

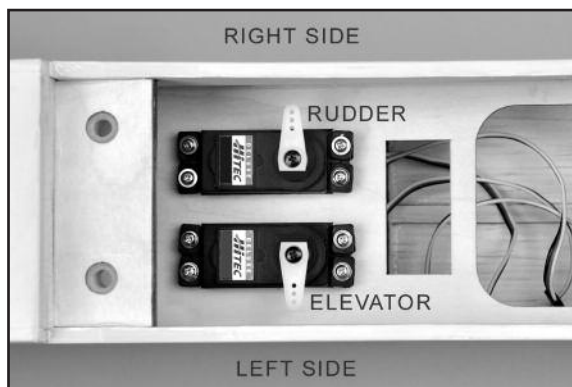


□ 23) Mount your receiver in a place of your choosing. If using a glow engine it is recommended that you wrap the receiver in foam rubber to protect it from vibrations.


□ 24) If you are using a receiver battery pack, mount your on/off switch in the fuselage side. Note that there are pre-cut holes in the fuselage sides, underneath the covering material, for either a standard size switch or a super switch with built-in charging plug. Cut away the covering over the hole that fits your switch and mount using the screw supplied with your switch.

□ 25) Assemble and install the rudder pushrod.

a) First slide a small piece of Fuel Tubing onto the small end of the Metal R/C Clevis. Next screw the Hex Nut that is on the Pushrod Wire all the way up to the end of the threads. Then screw the metal clevis halfway onto the threads.

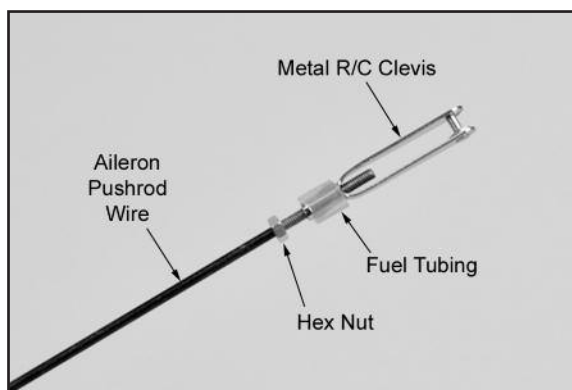

b) Locate the pre-cut pushrod exit hole for the rudder on the left side of the fuselage at the back of the plane. Slide the pushrod into the sleeve and attach the clevis to the control horn. Center the rudder and hold it in place with a couple pieces of tape so it cannot move.

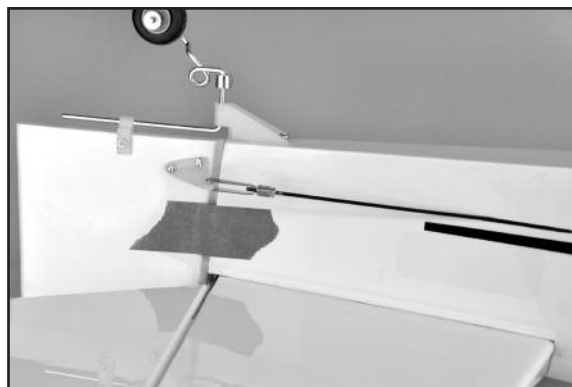

c) Inside the fuselage, hold the pushrod wire over the rudder servo output arm and mark the wire where it crosses over the outer hole in the servo arm.

ELECTRIC POWER SYSTEM

Skip this section if your using a glow engine power setup


For this section you will the Fuselage and:

- (1) Fiberglass Cowling
- (4) M3 x 10mm Screws
- (1) Plywood Electric Motor Mount
- (1) Balsa Triangle Stock
- (4) M4 x 20mm Socket-Head Bolts, for motor mount
- (4) M4 Flat Metal Washers, for motor mount
- (4) M4 x 16mm Socket-Head Bolts, for motor
- (4) M4 Split-Ring Lock Washers, for motor
- (4) M4 Blind Nuts, for motor
- (2) Hook-&-Loop (Velcro®) Straps
- (1) Electric Motor, ESC, Prop, Lipo Battery (not furnished)

NOTE: The mounting of the electric motor in the 4-STAR 54 assumes that your motor has a typical "X" or "cross" mounting plate on the back of the motor. Also note that the firewall portion of the laser-cut plywood motor mount is adjustable fore and aft to accommodate different length motors. Next we will determine where you should set the firewall for your particular motor.


□ 27) Assemble your motor according to the manufacturer's instructions. Then carefully measure the distance from the back of the mounting plate to the front of the thrust washer*.

* The "thrust washer" is the part of the prop adaptor where the back of the propeller will be located.

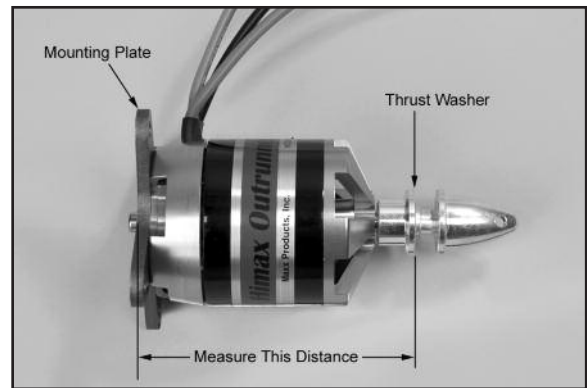


□ 28) For the 4-STAR 54, you need a distance from the back edge of the motor mount to the motor's thrust washer to end up exactly 4-1/2". This is important so the cowling will fit properly.

a) So what you need to do is to subtract the measurement taken in the previous step (27) from 4-1/2". The result is the distance you need to set the front of the firewall from the back edge of the plywood motor mount box. *(With the motor we are using in these photos, the motor measurement is 2-1/2". So 4-1/2" minus 2-1/2" = 2". Your result may be different depending on your motor.)*

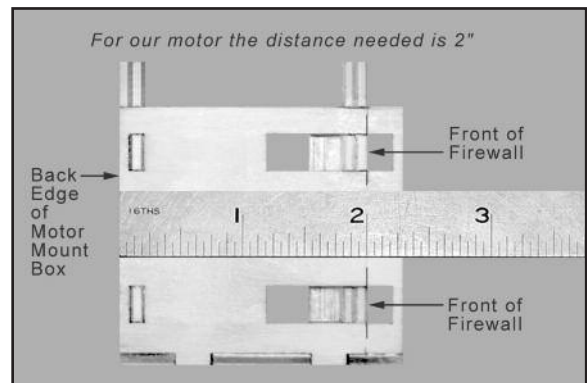


b) Carefully measure and mark the distance determined in the previous step from the back edge of the motor mount box towards the front. Do this along side each of the adjustment slots on both

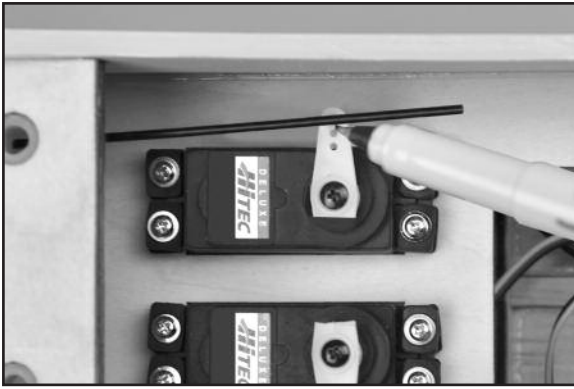

d) Cut the wire 1/4" past the mark and then put a 90-degree bend in the wire.




e) Push the wire through the outer hole in the servo output arm and secure with a nylon pushrod snap keeper.

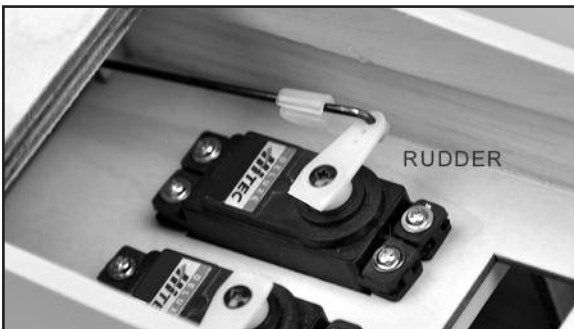

f) Make sure that the rudder servo is in neutral position and then adjust the metal clevis at the tail end as needed to get the rudder in perfect neutral position.

g) After the rudder is properly adjusted, insure that the metal clevis can't open up and come loose from the control horn by sliding the small piece of fuel tubing over the arms of the clevis. Also tighten the M2 Hex Nut up against the back of the clevis

□ 26) Locate the pre-cut pushrod exit hole for the elevator on the right side of the fuselage at the back of the plane and repeat step 25) in its entirety to install the elevator pushrod.

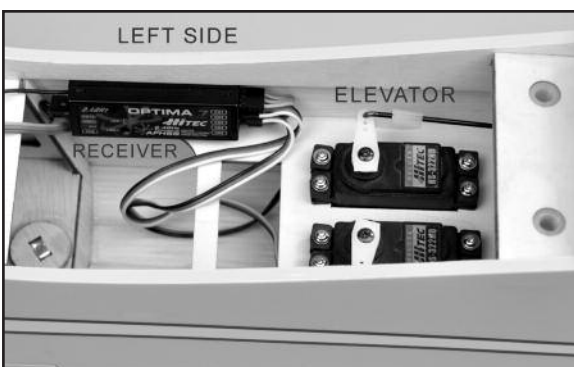

sides of the box (four marks total).


c) After you have all four slots marked, carefully align the front face of the firewall to line up with the marks. Make sure you end up with the firewall straight and square in the box. If it is not, recheck your marks and adjust as necessary.

d) Tack glue the firewall in place. Recheck once more to make sure that the front of the firewall is at the correct distance from the back of the motor mount box. That distance plus the length of your motor must equal 4-1/2". When satisfied it is correct, glue the firewall securely to the rest of the motor mount box.


□ 29) Remove the X mount plate from the back of your motor and center it on the firewall. Once you are sure it is properly located, mark the mounting holes with a pencil. Remove the X mount and drill out the mounting holes with a 7/32" dia. drill. Install four M4 Blind Nuts in the holes, on the back side of the firewall. Put a couple drops of glue on the flanges of the blind nuts to secure them to the plywood. Be careful not to get glue in the threads.



□ 30) Locate the piece of balsa triangle stock provided. Measure, cut and install pieces of triangle stock to reinforce all the corner joints inside the motor mount box.

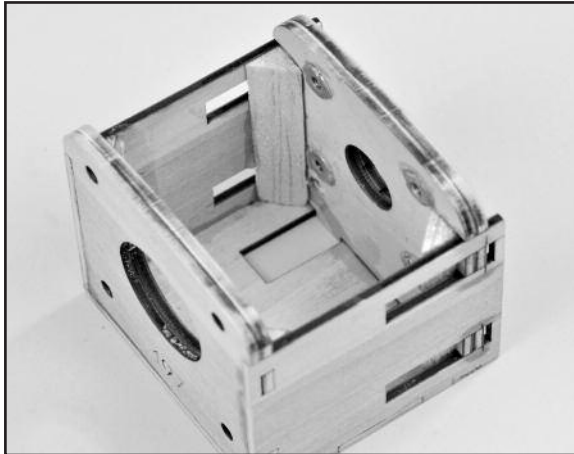

□ 31) Bolt the plywood motor mount box to the fuselage with M4 x 20mm Socket-Head Bolts and M4 Flat Metal Washers. Note that two access holes have been cut in the bottom corners of the firewall to allow access for your hex wrench.

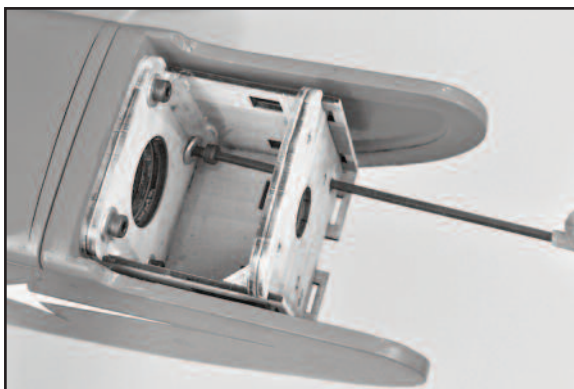

□ 32) If you have not already re-attached the X mount plate to the back of your motor, do so now. Then use the M4 x 16mm Socket-Head Mounting Bolts and Lock Washers to bolt your motor in place on the plywood motor mount box.



□ 33) Install your ESC


a) Solder appropriate battery connectors (not supplied) to the battery leads of your ESC.

b) Most ESCs should fit underneath the battery tray behind the firewall. If your ESC is too thick to slide in through the wing opening, you may need to enlarge the forward hole in the battery tray to let you install it from above. Secure the ESC in place with double-sided tape or Velcro® tape (neither of these are provided).

c) Now route the ESC's servo wire back to the receiver and plug it in.

d) Connect the ESC's motor wires to the motor. Operate the motor and check the direction of rotation. Always do this without a propeller attached! If you need to reverse the rotation, refer to the instructions that came with the motor and ESC.



SAFETY ISSUE: We strongly recommend the use of an "arming switch" for your motor installation. With an arming switch you can install your battery pack in the airplane and hook up the wires without danger of the motor starting. The arming switch keeps the electricity away from the motor until you "arm" it when you are ready to takeoff. The most common arming switches are a simple external plug that puts a break in the positive battery lead to the motor, such as the Maxx Products Arming Switch shown below. There are also arming switches built into some of the advanced ESCs now on the market.

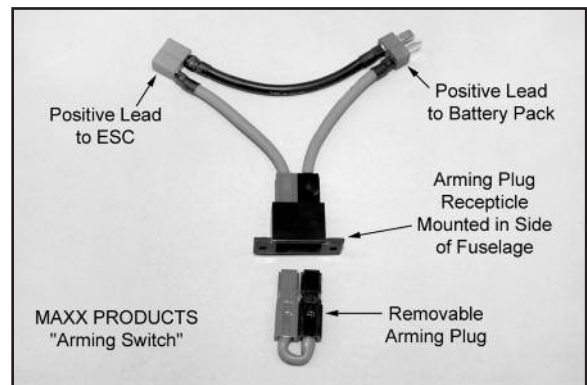

□ 34) Two hook-&-loop (Velcro®) straps are provided to hold your lipo battery pack in place inside the fuselage. Feed the straps through the slots in one side of the plywood battery tray, and then up through the other side, as shown in the next photo.

In addition to the two straps, it is a good idea to use hook-&-loop tape (not furnished) on both the bottom of your battery pack and

on the top surface of the plywood battery tray, to make sure the battery pack will not move around during aerobatics.

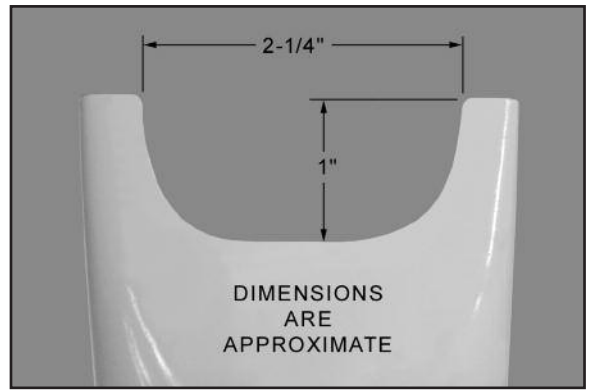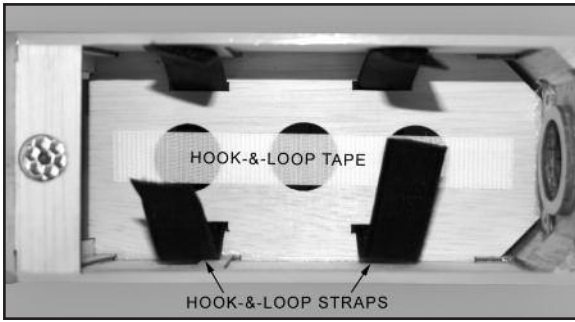

□ 35) Mount the cowling on the fuselage with the four M3 x 10mm Screws provided. Notice that the holes for the four cowl mounting screws are already pre-drilled in the cowling - two on each side.

a) First test fit the cowling in place on the fuselage. As you pass it over the motor, make sure all the wires are out of the way. Carefully adjust the exact position of the cowling. Make sure you have adequate clearance between the front of the cowl and the back of the propeller, and that the prop shaft is centered in the hole. Use a low tack tape to hold the cowling securely in place for the next step.

b) Use a 5/64" or #45 bit to drill a pilot hole for the top left cowl mounting screw. Center the drill in the hole in the cowling and drill into the fuselage side. Install an M3 x 10mm screw in the pilot hole - do not over-tighten the screw.

c) Recheck the position of the cowling and make any adjustments needed to get it back in perfect position, securing the tape to hold it in place.


d) Now drill another pilot hole for the upper screw on the other side of the cowling. Install the screw.

e) Repeat this process to install the two bottom cowl mounting screws. Remove all the tape.

do not have access to such a power tool, you can cut the opening with a drill, a hobby knife, and a sanding block - by first drilling a series of almost touching holes inside the pattern lines (1/8" dia. works well); then using the knife to cut through the connecting material between each hole; and finally finishing the edges of the opening with the file or a sanding block.

Additional Cooling Options: In addition to making an opening at the bottom rear edge of the cowling, you may decide after test flying that your ESC or battery pack could use some additional cooling. We have not yet found that to be necessary with our prototype 4-STAR 54, but it could happen in some cases with different motors, props, etc. If you need more cooling air flowing over the ESC and battery, here are a couple good options.

Option #1) To get more air flowing into the fuselage, you can open another hole in the fuselage firewall. Near the bottom of the firewall, below the motor mount box, you will find an oval shape cut into the thick plywood firewall. This oval is laser cut almost completely through the firewall, and it is easy to finish the cut and remove the oval, which will allow air to flow directly over the ESC.

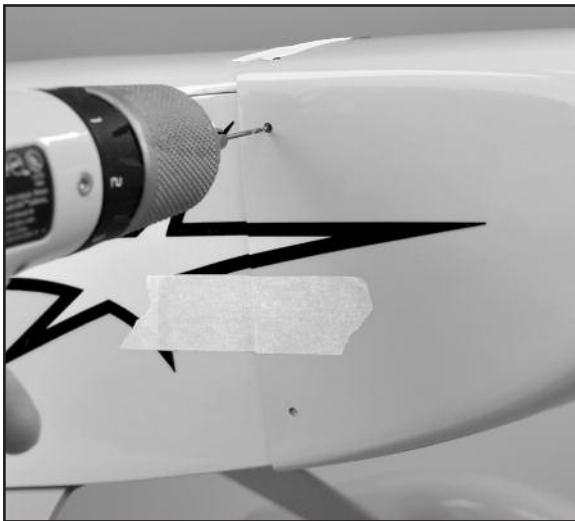

□ 36) COOLING IS IMPORTANT!

With a fully cowled motor, it is very important to make sure your power system is getting proper cooling. Air flowing into the front of the cowling must have a place to exit the cowl. In fact it's best to have more air exit area than inlet area to create a positive air flow through the cowling - an actual suction effect - drawing the heated air out of the cowling so that more cool air can come in. This positive air flow keeps your motor running cool. We recommend that you make a simple opening at the bottom rear edge of the cowling as shown in the next photo, to provide additional air exit area. The exact dimensions are not critical.

Option #2) If you need more air flowing out of the fuselage, make an air exit hole in the bottom rear of the fuselage, back near the tail, as shown here. Simply remove the covering over the hole already in the structure.



Note: A Dremel® Tool, or similar powered rotary hand-tool, with an assortment of sanding bits is without a doubt the best tool to use for making cutout in the fiberglass cowling. However, if you

□ 37) Mount a suitable propeller (not furnished) on your motor. Be sure to balance the propeller before installation.

GLOW POWER SYSTEM

Skip this section if your using an electric power setup


For this section you will need:

- (1) Fuselage
- (2) Nylon Engine Mounts
- (4) M4 x 20mm Mounting Bolts, for engine mounts
- (4) M4 Flat Metal Washers, for engine mounts
- (1) Fuel Tank
- (1) Rubber Stopper Assembly
- (1) Fuel Pick-Up Weight (clunk)
- (1) Fuel Line Tubing for inside tank
- (1) small Balsa Block for Fuel Tank Stop
- (1) Nylon Throttle Pushrod Tube
- (1) 18-1/4" long Wire Pushrod with Z-bend in one end
- (1) Metal Pushrod Keeper with (1)Set Screw & (2)Hex Nuts
- (2) Hook-&-Loop (Velcro®) Straps

□ 38) Start by putting the Fuel Tank together.

a) Locate the Rubber Stopper Assembly. There are three nylon tubes going through the rubber stopper. Orient the stopper so that one of the tubes is towards the top and then bend that tube up at a 45-degree angle. Do not apply heat to the tube - it will bend without heat. Just overbend it to nearly 90-degrees and then let it relax, to see where it will end up. Repeat if necessary until the tube will stay at 45-degrees.

b) Attach the metal Fuel Pick-Up Weight on one end of the silicone Fuel Line Tubing that goes inside the tank. Cut the other end of the fuel line tubing to a length that will allow the clunk to reach the back of the tank, without getting stuck on the walls of the tank. Test fit in the tank and adjust as necessary. With the stopper assembly in place, the fuel clunk should sit just in front of the rear of the tank and move freely inside the tank. If not pull the assembly back out and trim the tubing back until the stopper moves freely. The top of the vent tube should rest just below the top of the tank. It should not touch the top of the tank.

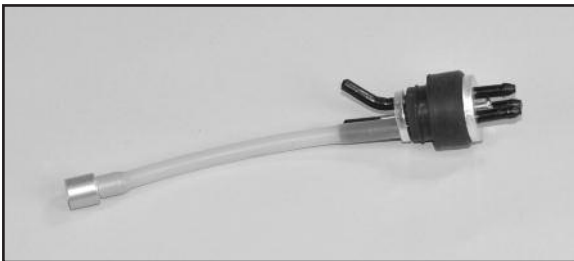

c) Once you are satisfied with the fit of both the fuel clunk line and the vent line you can tighten the machine screw to expand the rubber stopper and seal the stopper in the tank. Do not over tighten the screw as it can cause the tank to split. Attach three 6-inch lengths of silicone fuel tubing (not furnished) to the tank and label them appropriately as FILL, CARB, and VENT so you can identify them after the tank is installed in the airplane.



□ 39) Install the tank in the fuselage.

a) Install the two hook-&-loop (Velcro®) straps through the slots in the plywood fuel tank tray. You may find it useful to use a thin straight edge such as a small ruler inserted into the second slot to help guide the strap back up to the top of the tray.

- b) Set the plywood fuel tank support in place, but do not glue.
- c) Install the fuel tank through the back of the plywood tank support. Push the tank all the way up to the back of the firewall, pulling the 3 fuel lines through the firewall as you go.
- d) Strap the tank in place with the hook-&-loop straps.
- e) Glue the balsa block fuel tank stop in place on the plywood tank tray, up against the rear end of the tank.



□ 40) Bolt the two Nylon Engine Mounts on the front of the firewall, using M4 x 20mm Bolts and M4 Flat Washers provided. Note that the blind nuts are already installed in the back of the firewall. Leave the mounting bolts slightly loose for now - do not tighten them until the next step.



□ 41) Set your engine in place on the beams of the engine mounts. Notice that the holes in the mounts for the bolts are slotted to allow you to adjust the spacing between the mounts to fit your engine. If the beams of the mounts are too far apart to fit your engine, slide the mounts closer together. If they are already too close together, slide them apart. After you get the mounts in correct position, tighten all four mounting bolts, securing the engine mounts on the firewall.

□ 42) Slide the engine forward or aft on the engine mounts until the front of the engine's thrust washer is 4-1/2" from the front of the firewall. Double check to make sure that the engine is pointing exactly straight forward, and then mark the locations of the engine mounting holes onto the beams of the engine mounts, using a center punch or sharpened nail.

□ 43) Now set your engine aside and unbolt the engine mounts from the firewall. Drill clearance holes for your engine mounting bolts all the way thru the engine mount beams at the four locations you marked in the previous step. **IMPORTANT: Do not drill and tap these engine mounts. Doing so may weaken them and cause failure.** Use steel mounting bolts, flat washers, and nylon insert lock nuts (not provided).

TIP: Secure the engine mounts in a vise while you drill the holes. If at all possible use a drill press instead of a hand drill - the job will be much easier and the holes will be straighter.

Drill 1/8" dia. holes if you are using the 4-40 mounting bolts.
Drill 5/32" dia. holes if you are using 6-32 mounting bolts.

NOTE: Engines in the .40 to .46 size range are right at the break point between using 4-40 size or 6-32 size mounting bolts. Some .40-.46 engines have small holes in their case for 4-40 bolts, while other .40-.46 engines have holes large enough to accommodate 6-32 bolts. Be sure to buy the size appropriate for your engine.

□ 44) 2-STROKE THROTTLE PUSHROD

a) Mount your throttle servo in the middle opening of the servo tray in the fuselage. Put the control arm end of the servo on the same side of the fuselage as you engine's carburetor control arm.



b) The supplied throttle pushrod assembly consists of a wire pushrod running inside a nylon pushrod tube. Install the Z-bend end of the pushrod in the throttle servo arm. The plain end of the pushrod wire will connect to the carburetor control arm with a metal pushrod keeper, which allows you to easily adjust the overall length of the pushrod.

c) Determine which side of the airplane your throttle pushrod will be on. Typically for 2-stroke engines it will be on the right side of the fuselage. For 4-stroke engines it is often on the left side. Then determine the exact route your pushrod will take to connect to the throttle servo and the engine's throttle arm. In most cases you will want the pushrod to run right alongside the engine mount and fuel tank, and then angle over to the throttle servo arm.

d) Drill a hole through the firewall for the nylon pushrod tube to pass through. Be careful not to drill a hole in your fuel tank!

e) The nylon pushrod tube is provided extra long so it can be adapted to many variations in equipment. Determine how long it should be for your installation. For a typical 2-stroke setup you will want about 1" of tube sticking out in front of the firewall, and the other end of the tube to stop about 1" away from the throttle servo. Mark and cutoff the tube to the appropriate length, and then install it in the airplane, gluing it securely to the firewall.


f) Install the metal pushrod keeper in the carburetor control arm, with one hex nut on each side of the arm.

f) Slide the wire pushrod into the airplane from the back until you can install the Z-bend in the throttle servo arm.

g) Turn on your radio and adjust the length and travel of the throttle pushrod using the pushrod connector at the carburetor. Note: You may find it necessary to support the servo end of the outer nylon pushrod tube with a scrap of balsa, plywood, or foam, to keep the pushrod from flexing.

Note about 4-Stroke Throttle Pushrod


4-Stroke glow engines typically have their carburetor on the back of the engine, which puts the throttle arm very close to the firewall

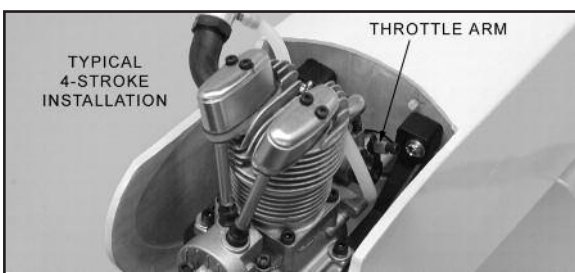

of the airplane. Using the pushrod connector on the carburetor end of the pushrod, and the Z-bend at the servo end, should work in most cases.

□ 45) COWLING

Some glow engine fliers do not use the supplied Fiberglass Cowling, preferring to keep the front of the airplane open for easy access to the engine for fueling and service. If you do want to use the cowling you will need to cut a large opening in the top of the cowling for the engine head to stick out. Step 35) on page 12 of this manual describes mounting the cowling.

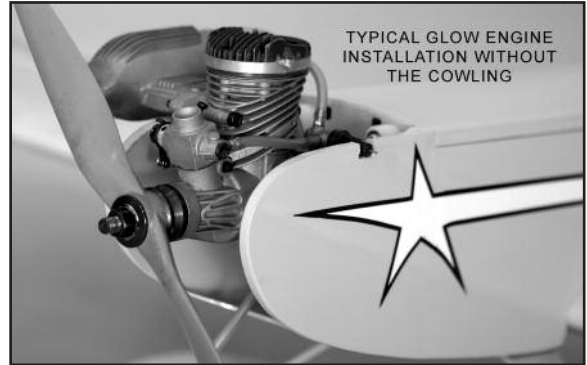

PILOT & CANOPY

For this section you will need the Fuselage and:

- (1) Painted Pilot Figure
- (1) Clear Plastic Canopy

□ 46) Test fit the pilot figure in the cockpit area. Check to make sure that the canopy will fit over the pilot and reposition if needed. Once you have the pilot in a good position trace around the base of the pilot with a felt pen. Using a razor blade, cut through the covering just inside your markings so you can expose the bare wood. Exposing the balsa will provide a stronger bond, insuring that the pilot will not "bail out" during aerobatics.




□ 47) Using epoxy or a silicone based adhesive, glue the pilot to the cockpit base and let it dry. It is not recommended to use CA glue as it may break loose over time.



□ 48) Double check the fit of the canopy to make sure it is ready to install. Make any final changes to the cockpit area at this time. Make sure the canopy is clean inside. Once it's glued down it will be impossible to clean later.

□ 49) Once you are happy with the fit, glue the canopy permanently in place on the fuselage. We recommend using a dedicated "canopy glue" such as RC56. It dries clear yet remains flexible. Put a small bead of glue all around the canopy on the inside of the black trim area. Make sure there is sufficient glue to make a good bond. Carefully place the canopy onto the fuselage and check it's alignment. With a wet paper towel, wipe off any excess glue that seeps out from the canopy. Once this is clean use tape to hold the canopy in place on the plane while the glue dries.

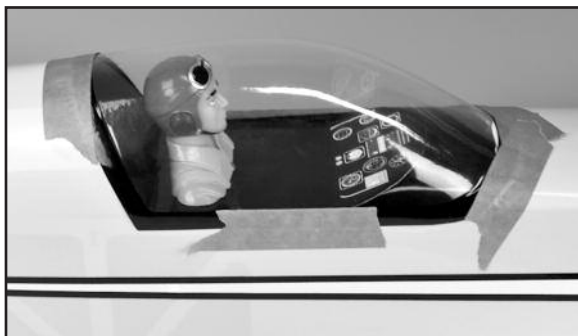

CONGRATULATIONS!

Your 4-STAR 54 is completely assembled. However, it is NOT ready for flight! There are a few very critical pre-flight tasks we must perform before flying.

PRE-FLIGHT

BALANCE

Balancing your airplane may be the single most important step in preparing it for flight. All airplanes, model or full-size, must be accurately balanced in order to fly successfully. An airplane that is not properly balanced will be unstable and will most likely crash.

NOT ALL 4-STARS WILL BALANCE THE SAME

It is impossible to produce a model airplane kit that will automatically have the correct balance point. Not everyone uses the same motor or radio gear - and all those items can vary in weight! Even propellers of the same size can vary as much as a 3/4 oz. between different brands. That's why every model must be balanced before flying. Don't feel that whatever balance point your model came out at is "good enough". Check carefully and make adjustments as required. An out of balance model is dangerous!

RECOMMENDED BALANCE RANGE IS FROM 2-3/4" to 3-1/2"

AFT OF THE LEADING EDGE OF THE WING

The following table lists several acceptable measurements and the equivalent percent of MAC (Mean Aerodynamic Chord).

<u>DISTANCE</u>	<u>% MAC</u>
2-3/4" =	26%
3" =	28%
3.25" =	30%
3-1/2" =	33%

A balance point at the center of the main spar (approximately 3" aft of the leading edge) is ideal for the initial test flight. After test flying you can adjust the balance point to fit your flying style.

Important: All the parts and components that will be in the airplane in flight must be installed in their correct positions. This includes all the radio gear, the propeller, battery pack, etc. Every piece of essential equipment must be installed, ready for flight. If your airplane is glow powered, always balance the airplane with the fuel tank empty.

CONTROL SURFACE TRAVEL

The following control surface travel data is based on our experience with the 4-STAR 54. These suggested surface movements should be considered as starting points. As your experience builds, the control travel can be adjusted to suit your particular style of flying and to explore the airplane's capabilities.

LOW RATES

Elevator	5/8" up	15%-50% expo
	5/8" down	
Ailerons	5/8" up	15%-50% expo
	5/8" down	
Rudder	3/4" right	15%-40% expo
	3/4" left	

HIGH RATES

Elevator	1" up	50%-70% expo
	1" down	
Ailerons	7/8" up	50%-70% expo
	7/8" down	
Rudder	1-1/2" right	50% expo
	1-1/2" left	

All measurements are taken at the widest point of the control surface. Adjust for HIGH RATES first, using mechanical means rather than your transmitter "end point adjustment" to get as close as possible to the recommended travel. By moving the position of the clevis at the control horn toward the outermost hole, you will decrease the amount of control throw of the control surface. Moving it toward the control surface will increase the amount of throw. Moving the pushrod wire at the servo arm will have the opposite effect: Moving it closer to center will decrease throw, and away from center will increase throw. Work with a combination of the two to achieve the closest or exact control throws listed. Once the HIGH RATES are set, just for LOW RATES using your transmitter "dual rate" adjustment.

A Note About High Rate Throws

High rate control throws are only meant for extreme aerobatics - not for normal flying. You should be competent and comfortable flying your 4-STAR 54 with normal control throws before attempting high rates.

A Note About Exponential: You will find lots of opinions about the proper amount of exponential travel to use on each control surface in both low and high rate settings. The best aerobatic pilots in the world agree that you will want more expo at high rates than at low rates. After test flights adjust your settings as needed to obtain the control feel you want. Consult your radio manual to find out how to adjust the exponential settings of your transmitter.

FLYING

If you have carefully followed the assembly instructions in this manual, test flying your new 4-STAR 54 should be a lot of fun. When test flying a new model we always recommend a calm day with little or no wind. These conditions allow you to better evaluate and more accurately adjust the trim of your airplane.

Always make it part of your pre-flight routine to check each control on the airplane, making sure the surfaces are moving in the correct directions. Also check each control linkage to be sure they are secure and that nothing is loose.

For take-off the airplane should be lined-up with the center of the field with the nose pointed directly into the wind. Hold a little up elevator and smoothly advance the throttle. As the 4-STAR 54

begins moving forward use the rudder as needed to keep the airplane going straight. At takeoff speed, use a slight amount of up elevator to lift off, using ailerons to keep the wings level. Climb to a reasonable altitude before making any trim changes.



With the control movements set at the "low rate" measurements the airplane should exhibit smooth, predictable control. Try a few loops and rolls. Inverted flight is easy, requiring a little down elevator for level flight. The 4-STAR 54 also performs nice inside and outside loops, snap rolls, Immelmans, stall turns, Cuban eights, and spins. Of course it is not a pattern aircraft but with practice there isn't much that it won't do. As with any aircraft, getting consistently good results is just a matter of practice.



While still at altitude, throttle back to idle. This will give you a good idea of the glide characteristics. While still at idle, steadily in-

WARNING! THIS IS NOT A TOY!

Flying machines of any form, either model-size or full-size, are not toys! Because of the speeds that airplanes must achieve in order to fly, they are capable of causing serious bodily harm and property damage if they crash. **IT IS YOUR RESPONSIBILITY AND YOURS ALONE** to assemble this model airplane correctly according to the plans and instructions, to ground test the finished model before each flight to make sure it is completely airworthy, and to always fly your model in a safe location and in a safe manner. The first test flights should only be made by an experienced R/C flyer, familiar with high performance R/C aircraft.

JOIN THE AMA

The governing body for radio-control model airplanes in the United States is the ACADEMY OF MODEL AERONAUTICS, commonly called the AMA. The AMA SAFETY CODE provides guidelines for the safe operation of R/C model airplanes. While AMA membership is not necessarily mandatory, it is required by most R/C flying clubs in the U.S. and provides you with important liability insurance in case your R/C model should ever cause serious property damage or personal injury to someone else.

ACADEMY OF MODEL AERONAUTICS
5161 East Memorial Drive
Muncie, IN 47302
Telephone: (765) 287-1256
AMA WEB SITE: www.modelaircraft.org

crease up elevator input to get a feel for the stall characteristics. Stalls tend to be very gentle with the nose dropping straight ahead with little tendency to drop a wing.



For landing use a standard landing approach, beginning with a throttled back downwind leg and base turn to the final approach into the wind. During final approach, keep a little power on until the airplane is over the end of the runway. In crosswind situations, a little rudder input will likely be needed to keep the airplane lined up with the runway. The 4-STAR 54 is best landed in the three-point position. After landing, always remember to hold up elevator when taxiing to keep the tailwheel firmly to the ground.



We hope that your 4-STAR 54 will provide you with many enjoyable flights. Please operate your airplane in a safe, responsible manner with respect to other flyers, spectators, and property.

Good luck and safe flying!

CUSTOMER SERVICE

SIG MFG. CO., INC. is committed to your success in both assembling and flying the 4-STAR 54 ARF. Should you encounter any problem building this kit or discover any missing or damaged parts, please feel free to contact us by mail or telephone.

SIG MFG. CO., INC.
P.O. Box 520
401 South Front Street
Montezuma, IA 50171-0520

PHONE: 1-641-623-5154
FAX: 1-641-623-3922

SIG WEB SITE: www.sigmg.com
SIG E-MAIL: mail@sigmg.com

LIMIT OF LIABILITY

The craftsmanship, attention to detail and actions of the builder/flyer of this model airplane kit will ultimately determine the airworthiness, flight performance, and safety of the finished model. SIG MFG. CO.'s obligation shall be to replace those parts of the kit proven to be defective or missing. The user shall determine the suitability of the product for his or her intended use and shall assume all risk and liability in connection therewith.