

bioBidet

Operating Instruction Manual

BB-600

UCI



- Thank you for purchasing this USPA product.
- You are kindly requested to read carefully this operation manual for proper use of this appliance with due attention.
- Please save this manual and place in an easily accessible location.
- Please register Warranty for proper service.

9 How to install



Do not plug in until installation is finished completely.
Not doing so may damage the appliance.

If electric work is needed, contact to the qualified electrician or serviceman only.

Remove the existing toilet lid and seat


1. Remove the nuts, washers and cone packings from the toilet seat mounting bolts in the back of the toilet.
2. Remove the toilet seat, lid and mounting bolts.
3. Keep them in case of installing again.

Install the appliance


Installation

How to mount the plate

Place the plate and guides over each mounting hole. Insert the mounting bolts through the plate and mounting holes, and slide cone packings and washers onto the bolts.

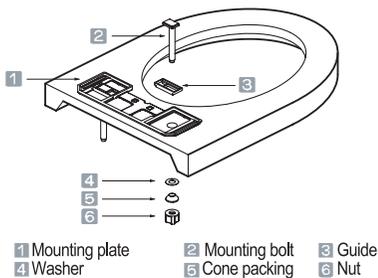

How to attach and detach the unit




Slide the unit until it clicks into plate.



Lift the unit up and forward.


Toilet size (elongated & round front)

- The toilet dimensions must be within those shown below. Do not install this appliance on a toilet that does not meet those dimensional requirements.

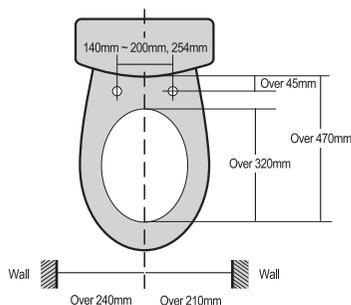


Occupied sensor

- This appliance is equipped with occupied sensor.
- Unit will not work unless seat is occupied.



Connecting the water hose and grounding wire

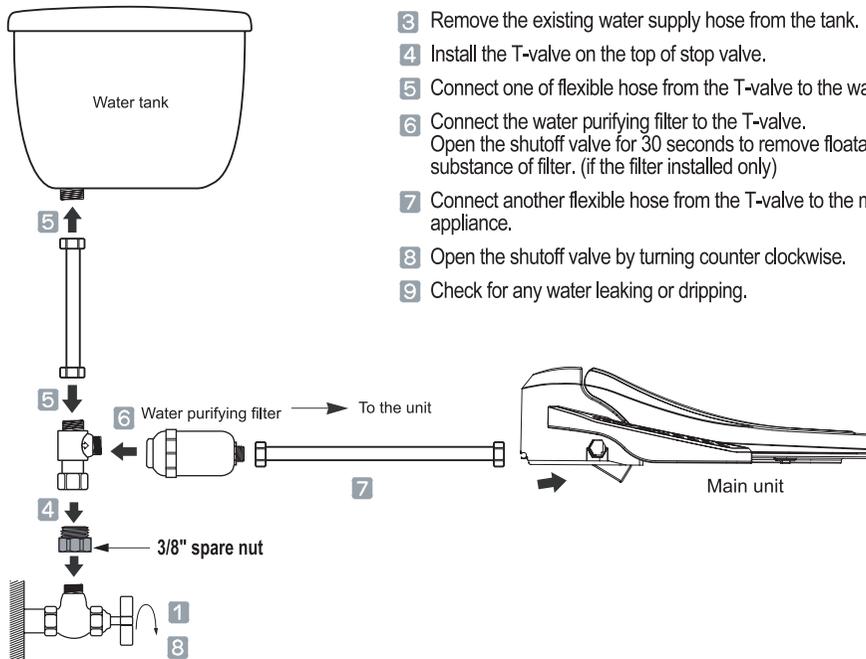

- 1 Close the shutoff valve by turning clockwise.
- 2 Flush the water tank completely to empty.
- 3 Remove the existing water supply hose from the tank.
- 4 Install the T-valve on the top of stop valve.
- 5 Connect one of flexible hose from the T-valve to the water tank.
- 6 Connect the water purifying filter to the T-valve. Open the shutoff valve for 30 seconds to remove floatage substance of filter. (if the filter installed only)
- 7 Connect another flexible hose from the T-valve to the main appliance.
- 8 Open the shutoff valve by turning counter clockwise.
- 9 Check for any water leaking or dripping.

※ Water filter is optional.

Trial operation

1. Preparation

Open the shutoff valve and check for any water leaking or dripping.
Plug the power cord into the outlet.
Press the "BIDET" or "CLEANSING", then water tank will be filled with water in 2 minutes.
After the water tank has filled up, you will hear long buzzer sound.

2. Checking all functions

Cover the toilet bowl using the plastic wrapping sheet of the unit to prevent the washing water from being sprayed out of the toilet.
Then check for all function described in this manual.

3. There are possibilities of water coming out that remains in the unit while heating.



205 Berg St., Algonquin, IL 60102

Phone: 847_854_7292

Fax: 847_854_1296

E-mail: support@biobidet.com

www.biobidet.com