



QUICK GUIDE

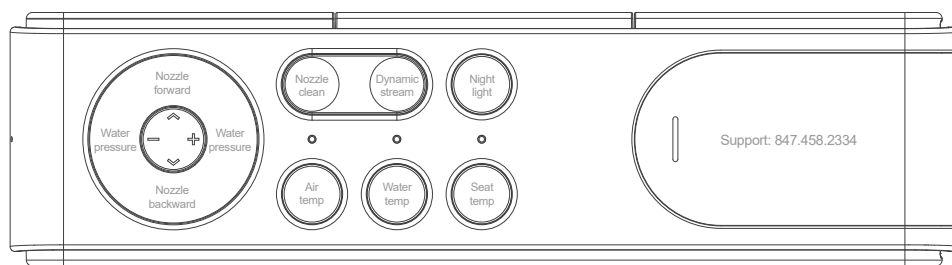

REMOTE

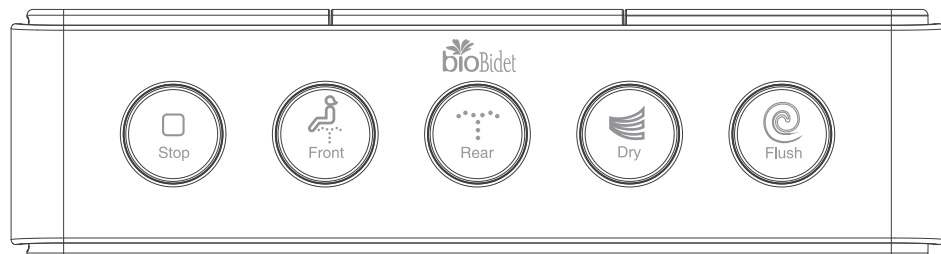

FUNCTIONS

OPEN/CLOSE COVER

Open or close the lid.

OPEN/CLOSE SEAT

Open or close the seat.

NIGHT LIGHT

Turns the night light on/off.

FRONT

Activate oscillating front wash.
Press again to turn off oscillation.

REAR

Activate oscillating rear wash.
Press again to turn off oscillation.

STOP

Stop any operation.

DRY

Press to activate the warm air dryer.
Press again to adjust the fan speed.
Low - Blue | Medium - Purple | High - Red
The dryer automatically turns off after 4 minutes.

FLUSH

Flushes the toilet.
The seat must be unoccupied.

DYNAMIC STREAM

Activate during a wash to quickly alternate the water temperature from warm to cold.

NOZZLE CLEAN

Extends the nozzle for manual cleaning.
The seat must be unoccupied.

SETTINGS

WATER TEMPERATURE | AIR TEMPERATURE | SEAT TEMPERATURE

Press the corresponding button to adjust the temperature settings.
Low - Blue | Medium - Purple | High - Red

WATER PRESSURE

Press the + or - buttons to adjust the water pressure accordingly.

NOZZLE POSITION

Press the arrow keys to adjust the position of the nozzle accordingly.



CONGRATULATIONS ON YOUR PURCHASE

Our goal is to provide you with the highest quality products and service possible.


If there is anything we can do to assist with your purchase, we have trained customer service professionals waiting to assist you. Please feel free to connect with us via phone, email, or chat.

Water Does it Better[®]

QUICK INSTALLATION GUIDE


Open the box right side up.

Remove accessories first, then remove the toilet from the box.

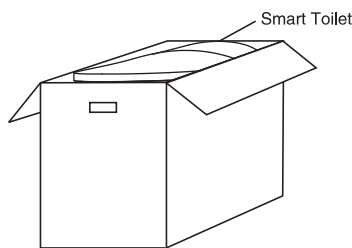


Place the wax ring and toilet.

Position the wax ring on the flange and lower the toilet in place. Remove the cap from the toilet water inlet.




Secure the toilet base.

Press down evenly on the toilet and secure it with the provided washers and nuts.

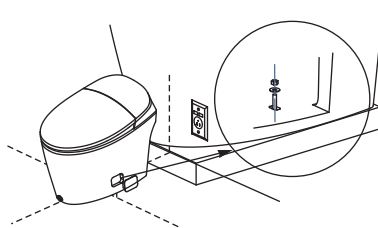


Attach the hoses.

Connect the toilet and bidet hoses to the T-valve.

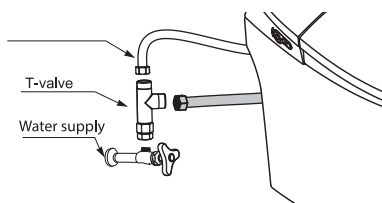

Connect the T-valve.

Connect the T-valve to the water supply valve.

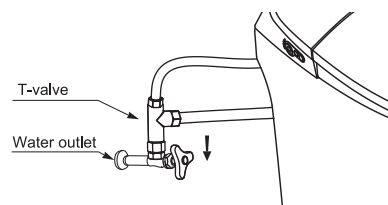

Test the connections.

Open the water supply valve and check for leaks. Plug the power cord into a grounded 120v outlet.

