

FINISHING HAND TOOLS

HAND TOOLS FOR FLAT FLOOR FINISHING




BUMP CUTTER

Cuts down bumps and fills low areas after concrete slab has been floated.




CHECK ROD

Reduces bumps and fills low areas while the concrete is still plastic.

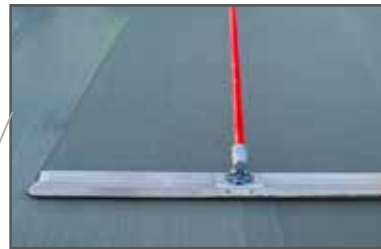

CHANNEL FLOAT

Use in lieu of traditional bull float for flatter floors and pavements.



Our hand tools are available with either the Rock-It (left) or Equalizer Pitch (right) adjusting head for precise, even control.

DESCRIPTION	TOOLS WIDTHS	CHANNEL / BEAM DIMENSIONS
HTCF CHANNEL FLOAT	5 - 12 ft (1.5 - 3.7 m)	6 in (15.2 cm)
HTCR CHECK ROD	8 - 16 ft (2.4 - 4.9 m)	2 x 4 in (5.1 x 10.2 cm)
HTBC BUMP CUTTER	8 - 16 ft (2.4 - 4.9 m)	2 x 4 in (5.1 x 10.2 cm)

Checked to exact flatness tolerances, our extruded magnesium Allen Hand Tools are specifically designed to improve floor or pavement levelness. Each tool comes standard with three 6' (1.8 m) snap-together aluminum handles, the equalizer, outriggers and turn buckle.

CONTRACTOR TOUGH

SITE PREP • PLACING • FINISHING • PAVING EQUIPMENT