


VP WALK-BEHIND TROWELS

VALUE PREMIUM SERIES WALKERS

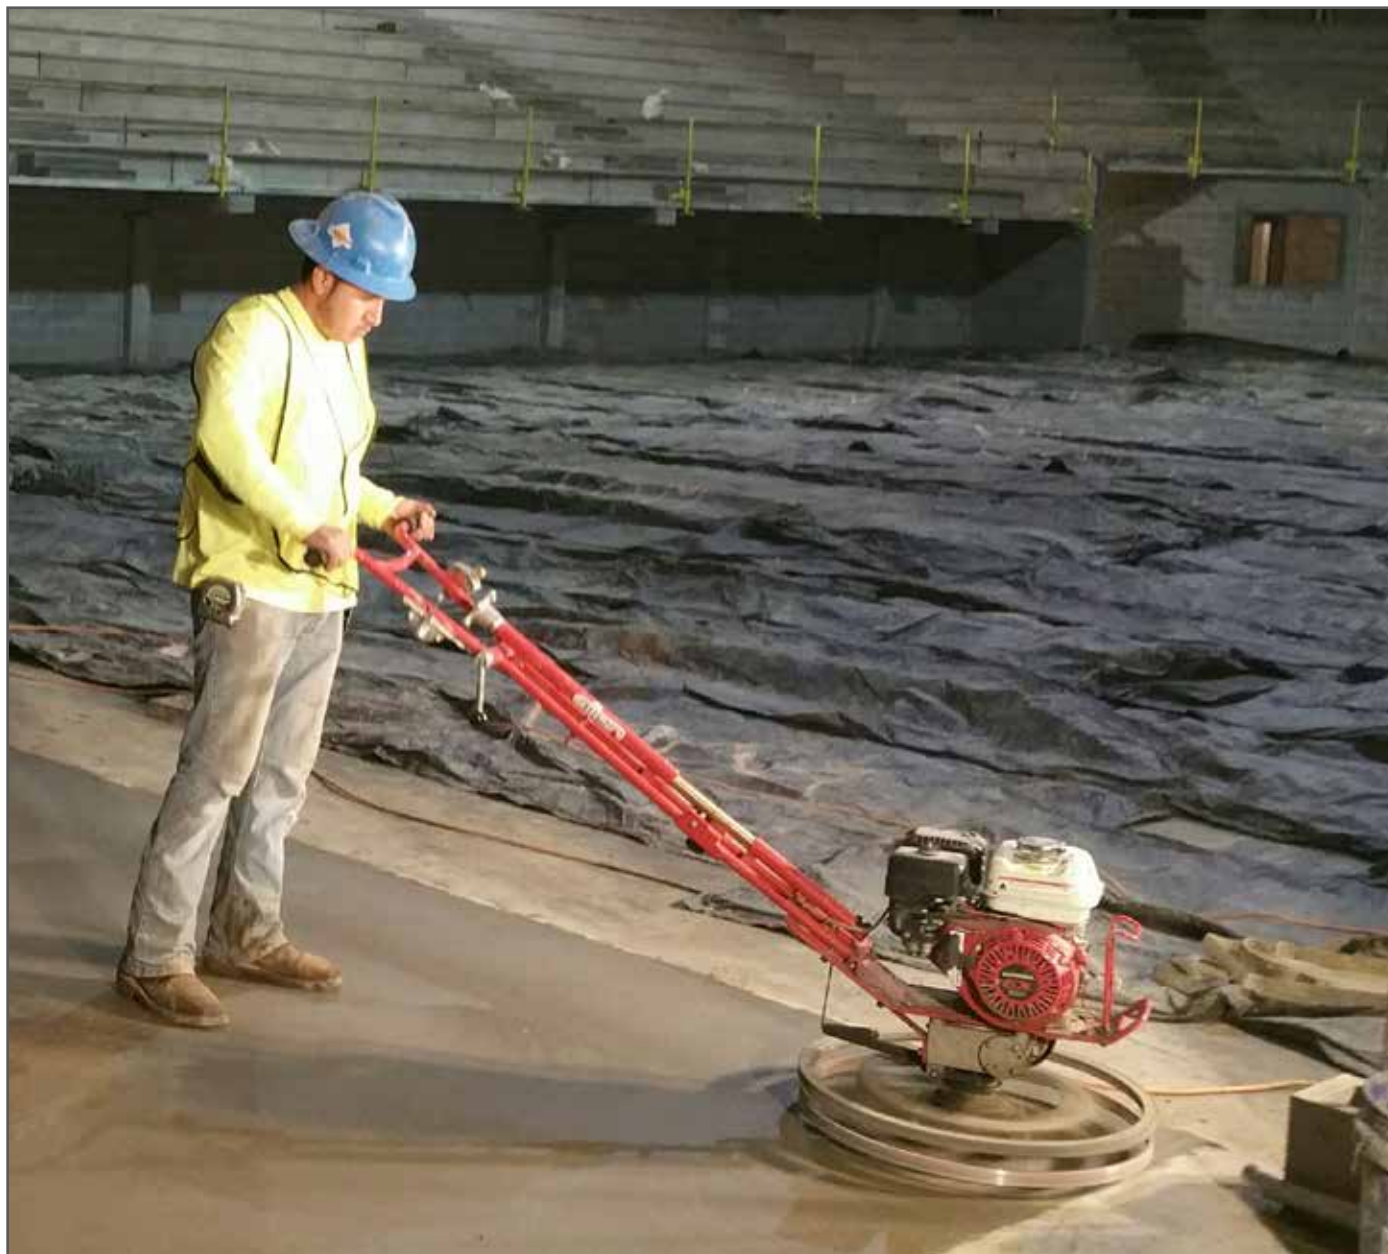


Allen Pro-Series Walkers feature precision engineered gearboxes for long, trouble-free life. We use cast iron spiders, pressure plates and lift levers for long wear and continuous service, and we precision machine our trowel arms and spiders to such close tolerances that our trowels do not require bushings.

CONTRACTOR TOUGH

SITE PREP • PLACING • FINISHING • PAVING EQUIPMENT

PRODUCT DETAILS

POWERED by
HONDA™

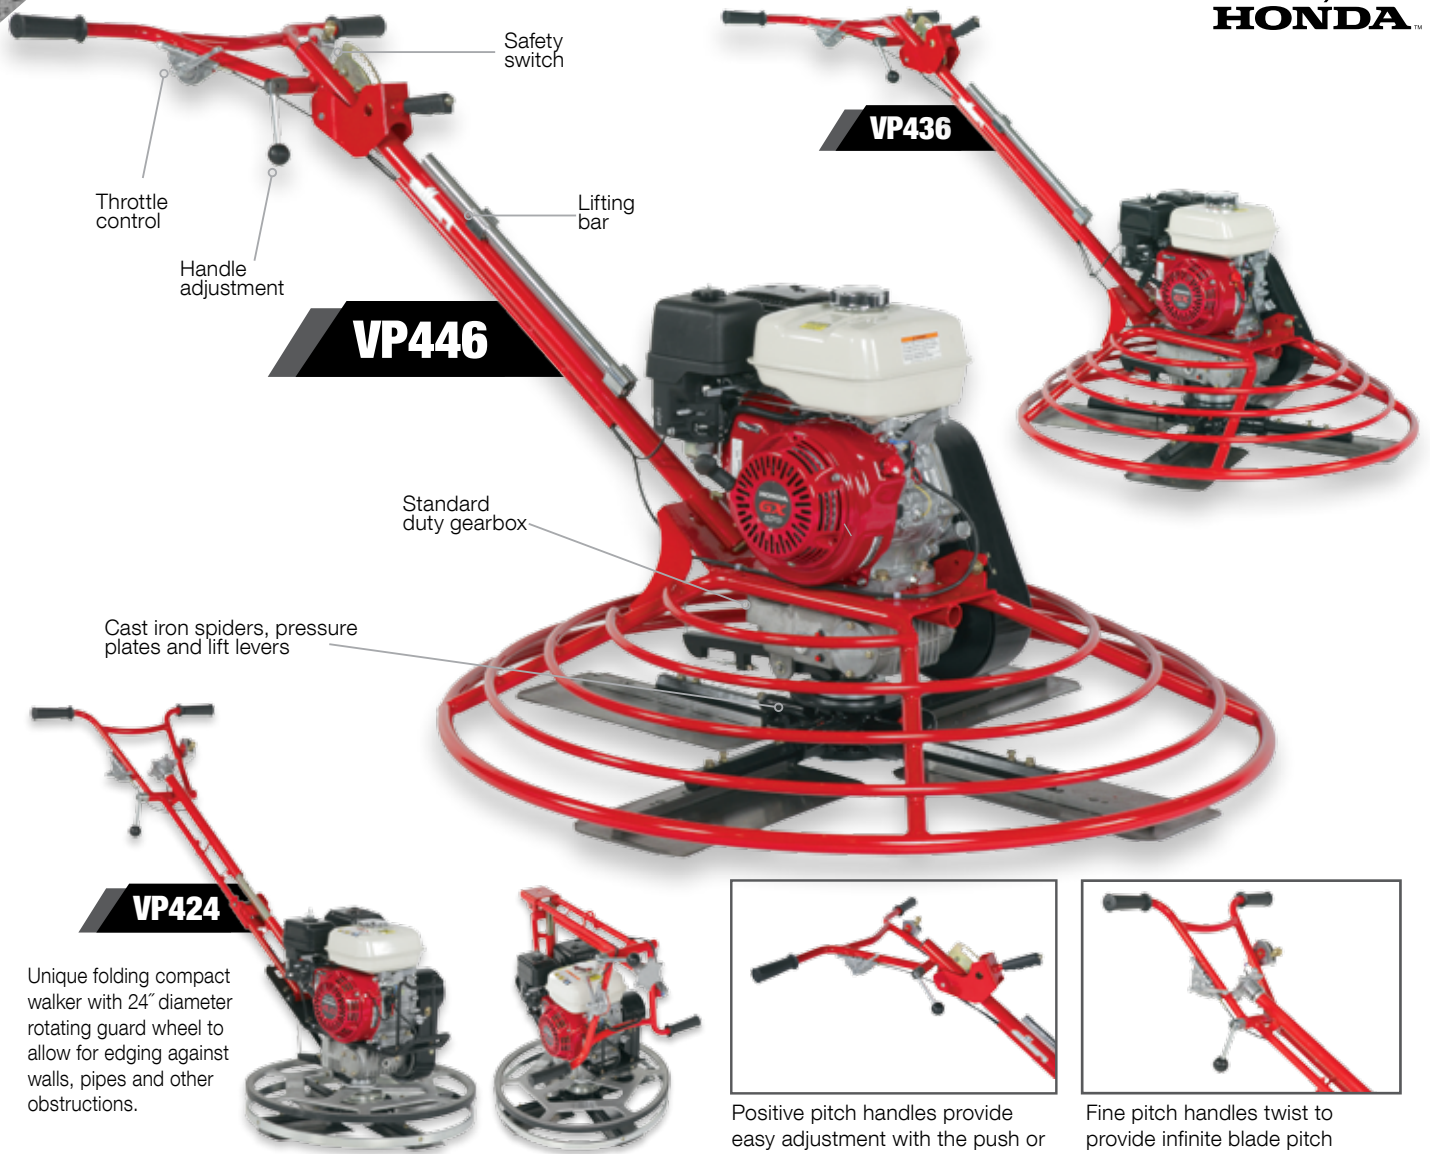

Unique folding compact walker with 24" diameter rotating guard wheel to allow for edging against walls, pipes and other obstructions.

Positive pitch handles provide easy adjustment with the push or pull of a lever.

Fine pitch handles twist to provide infinite blade pitch settings from flat to 28°.

DESCRIPTION	VP424	VP436	VP446
ENGINE	Honda GX120 (118 cc)	Honda GX160 (163 cc)	Honda GX270 (270 cc)
HORSE POWER CLASS	4 hp (3 kW)	5.5 hp (4.1 kW) or 9 hp (6.7 kW)	9 hp (6.7 kW)
ROTOR DIAMETER	24 in (61 cm) 4-blades	36 in (92 cm) 4-blades	46 in (117 cm) 4-blades
MAXIMUM ROTOR SPEED	135 rpm	150 rpm	150 rpm
TROWEL ARMS & SPIDER	Standard Duty	Standard Duty	Standard Duty
WEIGHT	122 lb (55 kg)	172 lb (78 kg) or 184 lb (87.9 kg)	210 lb (95 kg)
DIMENSIONS (L X W X H)	65 x 24 x 43 in (165.1 x 61.0 x 109.2 cm)	75 x 36 x 43 in (190.5 x 91.5 x 109.2 mm)	82 x 46 x 43 in (2,083 x 1,168 x 1,092 mm)

PARAGOULD, AR 72450 USA // WWW.ALLENENG.COM
800.643.0095 (USA ONLY) // 870.236.7751

allen
ENGINEERING
CORPORATION