


Sizing & fit

Proper bike fit is essential for best performance and comfort. Any size and geometry measurements shown on trekbikes.com are for general comparison purposes only. To find your perfect fit, visit an authorised retailer, where an expert skilled at sizing will help you find the appropriate bike and size for your individual needs.

	2XS	XS	S	M	M/L	L	XL	2XL
Rider Height	134.6 - 144.7 cm 4'5.0" - 4'9.0"	145.0 - 154.6 cm 4'9.1" - 5'0.9"	155.0 - 164.75 cm 5'1.0" - 5'4.9"	165.0 - 172.5 cm 5'5.0" - 5'7.9"	172.75 - 180.0 cm 5'8.0" - 5'10.9"	180.25 - 187.75 cm 5'11.0" - 6'1.9"	188.0 - 195.25 cm 6'2.0" - 6'4.9"	195.5 - 203.25 cm 6'5.0" - 6'8.0"
Inseam	63.5 - 68.33 cm 25.0" - 26.9"	68.58 - 73.41 cm 27.0" - 28.9"	73.66 - 78.49 cm 29.0" - 30.9"	78.74 - 81.03 cm 31.0" - 31.9"	81.28 - 86.11 cm 32.0" - 33.9"	86.36 - 88.65 cm 34.0" - 34.9"	88.9 - 91.19 cm 35.0" - 35.9"	91.44 - 96.52 cm 36.0" - 38.0"

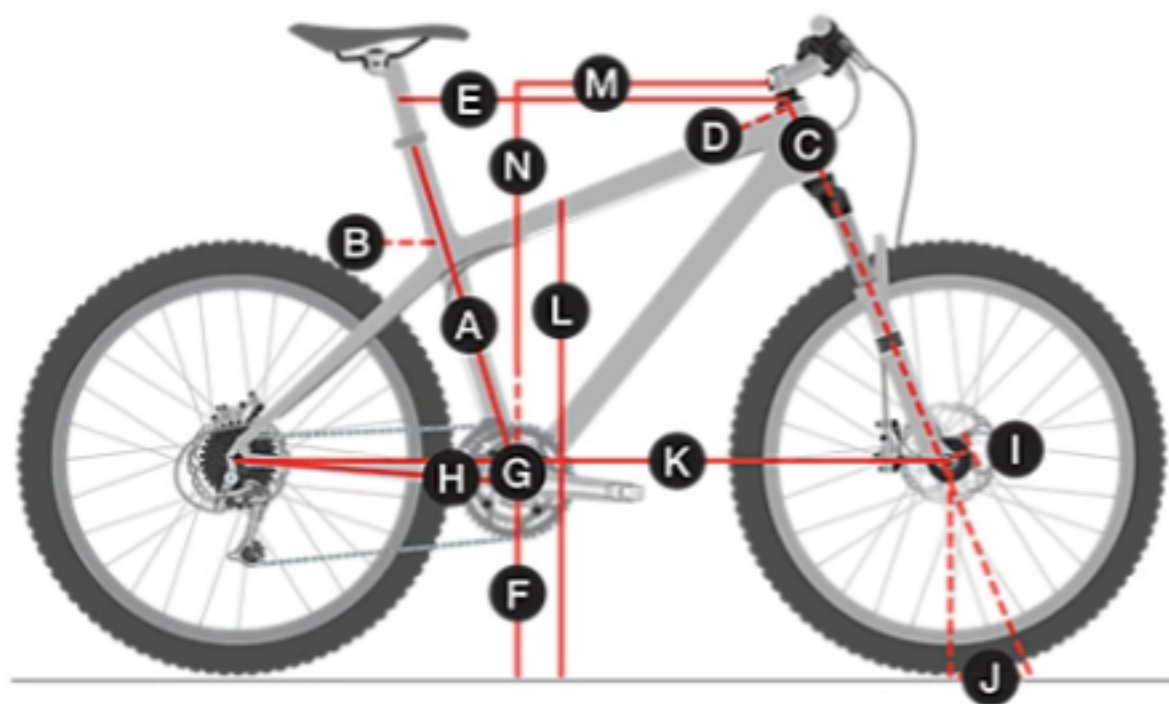

All measurements provided in cm unless otherwise stated.

Frame size number	13.5	13.5	15.5	17.5	18.5	19.5	21.5	23.0
Frame size letter	XXS	XS	S	M	ML	L	XL	XXL
Wheel size	26"	27.5"	27.5"	29"	29"	29"	29"	29"
A – Seat tube	34.3	34.3	36.8	41.9	44.4	47.0	52.1	55.9
Effective seat tube angle	73.2°	73.5°	73.5°	73.0°	73.0°	73.0°	73.0°	73.0°
C – Head tube length	9.0	9.0	9.0	9.0	9.0	10.0	12.0	12.0
D – Head angle	68.7°	69.3°	69.3°	69.5°	69.5°	69.5°	69.5°	69.5°
E – Effective top tube	54.0	54.4	55.5	60.2	61.8	63.8	65.9	67.3
F – Bottom bracket height	28.7	29.2	30.2	31.0	31.0	31.0	31.0	31.1
G – Bottom bracket drop	5.3	5.8	4.8	5.8	5.8	5.8	5.8	5.8
H – Chainstay length	43.8	43.8	43.8	43.8	43.8	43.8	43.8	43.8
I – Offset	4.3	4.2	4.2	4.2	4.2	4.2	4.2	4.2
J – Trail	8.7	8.8	8.8	9.3	9.3	9.3	9.3	9.3
K – Wheelbase	105.3	104.9	106.6	110.0	111.6	113.7	115.9	117.3
L – Standover	70.2	65.8	68.6	74.8	75.8	75.7	76.9	80.4
M – Frame reach	37.0	37.6	38.5	41.8	43.4	45.1	46.6	48.0
N – Frame stack	59.6	56.5	57.4	60.2	60.2	61.1	63.0	63.0