


# INSTALLATION DEPENDS ON THE SIZE OF YOUR EXISTING POOL NICHE OR LIGHT HOLE


SEE DETAILED INSTALLATION INSTRUCTIONS ON PAGE TWO

**If opening is 7<sup>3</sup>/<sub>4</sub>" or larger in diameter (no drilling required)**

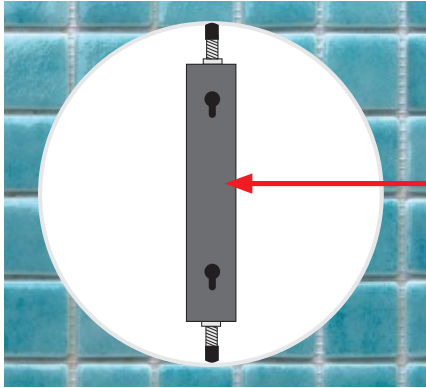


Use the included support bracket to install the light into your existing niche or light hole.

**If opening is 7<sup>3</sup>/<sub>4</sub>" or smaller in diameter (drilling required)**

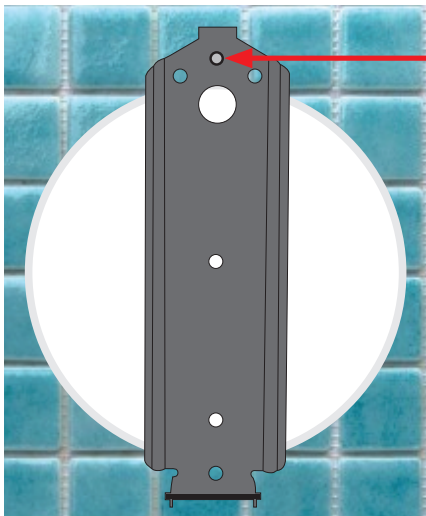

**OPTION 1** - If you don't have an existing niche and set screw use a 1/4" drill bit to drill a hole into the center of the light bracket and into the pool wall. Insert wall anchor and attached the bracket with screw.

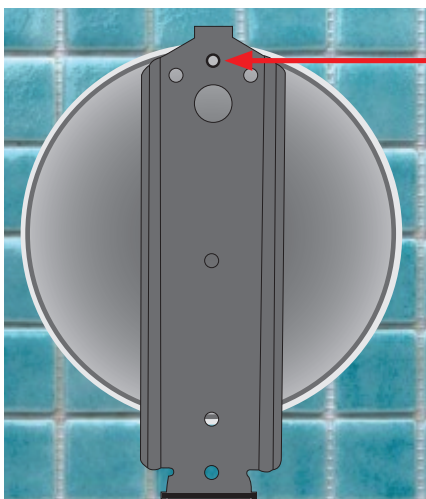

**OPTION 2** - If you have a niche and set screw use a 1/4" drill bit to drill a hole into the center of the light bracket. Attach the bracket to your niche using existing set screw.

**NOTE:** Light cable will need to go through the back of the niche.

If you have questions please reach out to use at [nomoregreen.com](http://nomoregreen.com)


# ATTENTION:

This is a 12V light. A 12V transformer with a minimum of 60W (100W recommended) **MUST** be used with this light and is not included. **Do not connect to 110V or 120V as it will blow out the light.** Please use a licensed electrician for installation.


## LIGHT INSTALLATION INSTRUCTIONS

**Please use a licensed electrician for installation.**

1. Turn off the circuit breaker to the pool light switch box. Place a non-contact voltage tester against the switch box to verify no power is present.
2. Disconnect and remove your existing pool light fixture if applicable.
3. Run power cable through the opening in pool wall to the surface where your pool light switch box is located.
4. Measure the diameter of your pool light opening. If the opening is less than 7 3/4" in diameter, use **INSTALL A**. If the opening is 7 3/4" or larger in diameter, use **INSTALL B**. After completing the install of either A or B, continue with steps 5 and 6.
5. Connect the two wires from the light to the output wires on the transformer. **NOTE:** The wires are interchangeable. Then connect the two input wires from the transformer to your 120V power source (if applicable). It is recommended to use an underwater cable gland/connector.
6. Turn the circuit breaker to the pool light switch box on. Put the light switch to the ON position. Use the included remote and begin enjoying the Life-Bulb LED Pool Light!



## INSTALL A

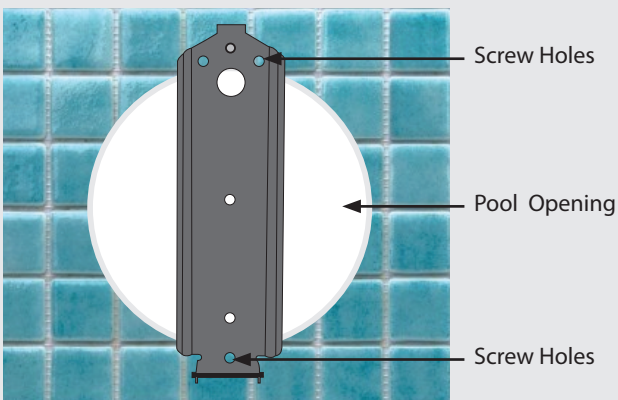

(Note: the support bracket is not needed for this installation)

- STEP 1** Remove the light bracket from the back of the light by unscrewing the set screw and releasing the bracket from the bottom hinge.
- STEP 2** Attach the light bracket to the existing hole on your niche or mark and drill (using a 1/4" bit) holes in your pool wall for wall anchors and screws. Attach the bracket to the pool wall.
- STEP 3** Reattach the bottom of the light to the hinge at the bottom of the light bracket. Tilt the light upwards and secure it to the top of the light bracket with the set screw.

## INSTALL B

**STEP 1** Remove the light bracket from the back of the light by unscrewing the set screw and releasing the bracket from the bottom hinge.

**STEP 2** Assemble the support bracket as shown below.

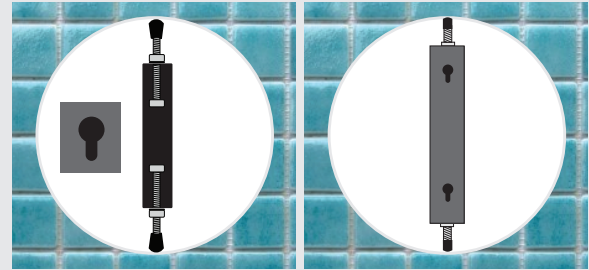
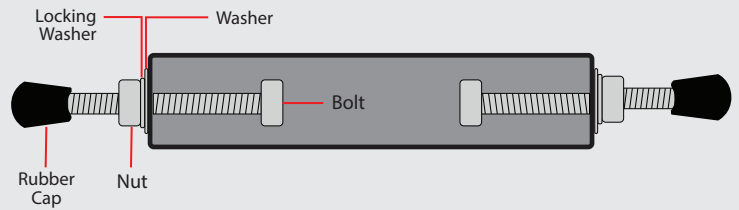


Figure 1

Figure 2

**STEP 3** Prior to inserting the support bracket into the pool light opening, adjust the bolts so the length of the support bracket is slightly smaller than the pool opening diameter. Ensure the bolts are equal on both ends so the support bracket is centered in the pool light opening.


**STEP 4 (Figure 1)** Insert the support bracket into the opening with the keyhole slots in the down position and the bolts are facing towards you.

**STEP 5** Turn upper bolt until the rubber cap is firm against the top of the pool light opening wall then tighten the outside nuts.

**STEP 6 (Figure 2)** Carefully rotate the bracket 180 degrees so the flat side of the support bracket is facing towards you and is flush with the edge of the pool light opening.

**STEP 7** Attach the two small beveled screws and nuts loosely to the light bracket. The beveled screw heads should be on the flat side of the bracket.

**STEP 8 (Figure 3)** Connect the brackets by inserting the heads of the beveled screws from the mounting bracket into the keyhole slots on the support bracket. Adjust the beveled screws as needed until they can be slid down and locked in place in the keyhole slots. Tighten the nuts on the beveled screws to secure.

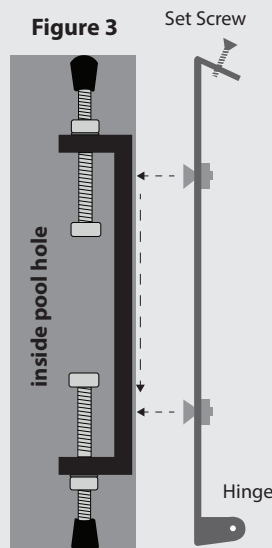

**STEP 9** Reattach the bottom of the light to the hinge at the bottom of the light bracket. Tilt the light upwards and secure it to the top of the light bracket with the set screw.



To see our installation video, scan the QR code with your phone's camera or go to <https://nomoregreen.com/pages/wallmountvideo>