

REFRIGERATOR MANUFACTURER
Turbo air
 more durable, efficient, beautiful

4184 E. Conant St.
 Long Beach, CA 90808
 Tel. 310-900-1000
 Fax. 310-900-1077
www.turboairinc.com

| | |
|-----------------|-------|
| Project : | |
| Model # : | |
| Item # : | Qty : |
| Available W/H : | |
| Approval : | |

Glass Half Door Heated Cabinet

Reach-In
PRO Series

FEATURES & BENEFITS

- Digital temperature control & monitor system**
 - Keep food products safe by maintaining constant temperatures.
 - Alarm beeps when doors are not sealed.
 - Early warning alarm program detects issues before malfunction occurs.
 - Digital display allows for easy monitoring.
 - Sensitive touch display.
- Ducted fan air distribution system**
 Maintains temperature within the food zone
- On/Off switch**
 ON/OFF switch is located on control panel
- All stainless steel cabinet construction**
 The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.
- Sturdy, clean stainless steel shelving**
 Shelves are the most important part of cleanliness as they come in direct contact with food. After a while, PVC coated wire shelves may peel, rust and lead to unsanitary conditions. Only the Turbo Air PRO series uniquely provides stainless steel shelving.
- LED interior lighting**
 Includes a U.S. patented dimming option, exclusively from Turbo Air. This feature reduces energy consumption by 3~5%.
- High-density polyurethane insulation**
 The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- Half length glass doors with locks**
- Self-closing doors with stay open feature at 120 degrees**
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation**
- Lifetime guaranteed heavy duty hinges and handles**
 - PRO-26-2H-G: Right hinged, 115V
 - PRO-26-2H-G-L: Left hinged, 115V
 - PRO-26-2H2-G: Right hinged, 208V
 - PRO-26-2H2-G-L: Left hinged, 208V

Model : PRO-26-2H-G(-L)
PRO-26-2H2-G(-L)



| Model | Swing Door | CU./FT. | #of Shelves | Wattage (W) | AMPS | Crated Weight (lbs.) | L x D x H [†] (inches) |
|-------------------------------------|------------|---------|-------------|-------------|-------------|----------------------|--|
| PRO-26-2H-G(-L) PRO-26-2H2-G(-L) | 2 | 24.8 | 3 | 1550 | 13.5 7.5 | 310 | 28 ³ / ₄ X 33 ⁷ / ₈ X 78 |

Glass Half Door Heated Cabinet

Reach-In
PRO Series

Model : PRO-26-2H-G(-L) PRO-26-2H2-G(-L)

| ELECTRICAL DATA | PRO-26-2H-G(-L) | PRO-26-2H2-G(-L) |
|----------------------------|---|---|
| Voltage | 115/60/1 | 208/115/60/1 |
| Plug Type | Ⓜ NEMA 5-15P | Ⓜ NEMA L14-20P |
| Full Load Amperes | 13.5 | 7.5 |
| Wattage (W) | 1550 | 1550 |
| Feed Wires with Ground | 3 | 4 |
| Cord Length (ft.) | 8 | 8 |
| DIMENSIONAL DATA | | |
| # of Doors | 2 | 2 |
| # of Racks Accepted | 1 | 1 |
| Net Capacity (cu. ft.) | 24.8 | 24.8 |
| Ext. Length Overall (in.) | 28 ³ / ₄ (730mm) | 28 ³ / ₄ (730mm) |
| Ext. Depth Overall (in.)* | 33 ⁷ / ₈ (860mm) | 33 ⁷ / ₈ (860mm) |
| Ext. Height Overall (in.)† | 78 (1982mm) | 78 (1982mm) |
| Int. Length Overall (in.) | 22 (559mm) | 22 (559mm) |
| Int. Depth Overall (in.) | 27 ⁵ / ₈ (702mm) | 27 ⁵ / ₈ (702mm) |
| Int. Height Overall (in.) | 58 ³ / ₄ (1493mm) | 58 ³ / ₄ (1493mm) |
| # of Shelves | 3 | 3 |
| Shelf Size (L x D) (in.) | 23 ¹ / ₂ x 26 ³ / ₈ | 23 ¹ / ₂ x 26 ³ / ₈ |
| Net Weight (lbs.) | 265 | 265 |
| Gross Weight (lbs.) | 310 | 310 |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/4" for door handles.

† Height does not include 5" for caster height.

■ WARRANTY : 3 Year Parts and Labor Warranty

■ Standard features


- Door locks standard
- Standard 4" dia. swivel casters with locks on the front set
- Easy replaceable one piece magnetic door gaskets
- Solid and sturdy grille design

■ OPTIONAL ACCESSORIES


- 5" caster, 1/2" diameter & 13 TPI:
M726500100 (non-brake), M726500200 (w/ brake)
- 4.7" leveling seismic leg (1/2", 13 TPI): 30221M0500
- 6" stainless steel leg: 30221M0600
- Additional stainless steel shelf: H26R901680
- Half door bun tray rack: TSP-2224
(each holds up to six 18"L x 26"D sheet pans- sold separately)
- Tray slides kits: TS1-N1(#1), TS1-N4(#4), TS1-UN(Universal)

PLAN VIEW

(unit : inch)

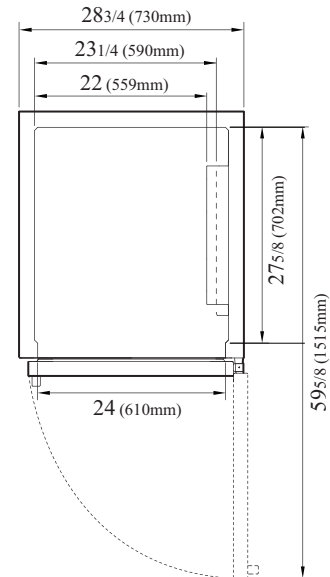

TOP VIEW

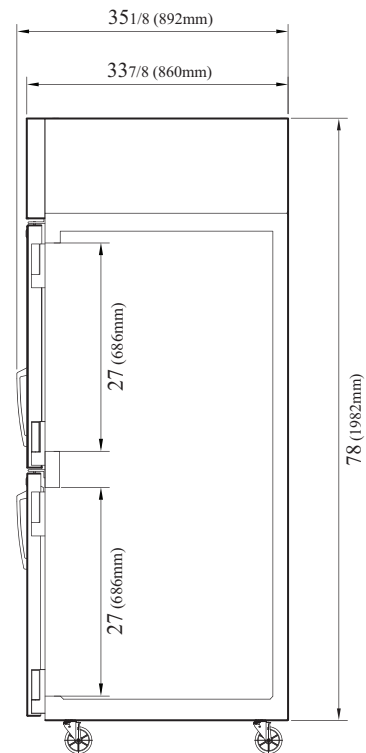

SIDE VIEW

Ver.20190517



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

REFRIGERATOR MANUFACTURER
Turbo air

GERMAN
KNIFE

RADIANCE

REFRIGERATION SYSTEM
Turbo air

TEXAKING