

KM-151B_H 01/18/18 Item # 13236

WxDxH 233/4" x 281/4" x 39"* *including 6" legs

Shipping Dimensions 27" x 31^{1/2}" x 39^{1/2}"

KM-151BAH

Air-Cooled Shown

KM-151BWH Water-Cooled



















Item #:_ Project: _ ΔΙΔ#٠

Features

- Individual crescent cube
- Stainless steel evaporator
- ► CycleSaver[™] design CycleSaver



- Up to 146 lbs. of ice production per 24 hours
- Built-in storage capacity of 2.6ft³/78 lbs.*
- · Durable stainless steel exterior
- · Front in, front out airflow
- · Slide in door
- EverCheck $^{\text{TM}}$ alert system eyecheck
- · Removable air filter
- Power switch accessible without panel removal
- · Built-in install without legs is 33"H
- · R-134a Refrigerant

Warranty:


3 Year Parts & Labor on entire machine. 5 Year Parts & Labor on Evaporator.

5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

*Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft3 average density of ice.

			ICE PRODUCTION		WATER USAGE		ELECTRICAL						
	Condenser	Model	Lbs. per	ter Temp 24 hours 90°/ 70°F	Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Max. Fuse Size or HACR Circuit Breaker	Amperage	Voltage	Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
ı	Air-Cooled	KM-151BAH	146	121	17.8	N/A	8.4	15A	7.0A	115V/60/1	3,290	8.5 oz.	117 / 156
	Water-Cooled	KM-151BWH	146	130	25.0	140	7.3	15A	6.8A	115V/60/1	3,220	7.9 oz.	117 / 156

KM Cube Dimensions*



* approximate size in inches, image not to scale

Operating Limits

· Ambient Temp Range 45 - 100°F Water Temp Range 45 - 90°F

· Water Pressure 10 - 113 PSIG

· Voltage Range 104 - 127V

Service

· Allow enough space at rear for water supply and drain connections, at least 12" (30 cm) clearance at front and at least 0.6" (15 mm) clearance at top for mainenance.

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Water-Cooled Model (Lines Must Be Independent of Icemaker)


- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent

Hoshizaki reserves the right to change specifications without notice.

AIR-COOLED



KM-151B_H 01/18/18 Item # 13236

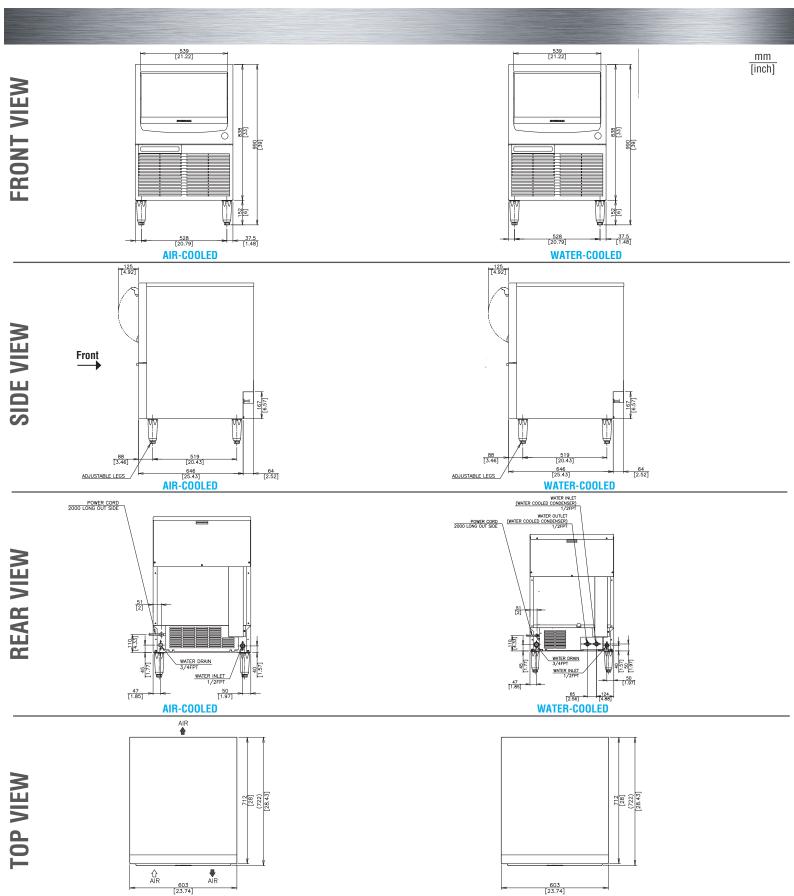

WATER-COOLED