



Your Solutions Partner

Specifications

F.O.B St. Louis, Missouri 63102



7122A-3072
Maple Top w/ Adjustable Undershelf



7123-3072
Maple Top w/ Tubular Base

OPTIONS:

- Stainless steel overshelf - 1056
- Cross bracing welded to table
- Casters, swivel, two w/locks, 5" diameter, rubber tires
- Casters, swivel, two w/locks, 5" diameter, polyurethane tires
- Spice bins - **201**
- Portable ingredient bin - **5027**
- 5"H maple riser - specify back only or sides and back - standard or coved
- Stainless steel adjustable bullet feet
- Drawer, standard - **185** or **186**
- Drawer, deluxe - **176** or **177**
- Tiers of drawers - **731** (S/S in & out), **732** (galv in S/S out)

AGENCY LISTING:



DUKE MANUFACTURING CO.
2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
314.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

SS-DM-00218-AW-07

Approval Stamp(s):

PRODUCT INFORMATION:

PROJECT: _____

ITEM: _____

QUANTITY: _____

MODEL:

Duke Worktables - Maple Top Tables

- 7121A** Galvanized undershelf/galvanized legs/plastic feet
- 7122A** Stainless steel undershelf/stainless steel legs & feet
- 7123** Galvanized tubular bracing/galvanized legs/plastic feet
- 7124** Stainless steel tubular bracing/stainless steel legs & feet

TOP:

- 1-3/4" thick laminated edge-grained hard maple

ADJUSTABLE UNDERSHELF:

- Heavy gauge galvanized or stainless steel, as specified
- Die-formed corners
- Set screws to lock in place

LEGS:

- Galvanized leg sockets
- Non-marking, non-corrosive, adjustable plastic bullet feet for galvanized legs
- Stainless steel feet for stainless steel legs
- 1-5/8" diameter, S/S or galvanized tubular legs


CROSS BRACING:

- 1-5/8" stainless steel or galvanized steel tubing
- 10" from floor
- Attached with slotless, contour-head bolts


SHORT FORM SPECIFICATIONS:

Duke Worktables - Maple Top Tables. Top shall be constructed of 1-3/4" thick laminated edge-grained hard maple. Adjustable undershelf to be or heavy gauge galvanized or stainless steel with aluminum die-cast corners to provide tight sanitary contact with legs. Locks in place with set screws at any height. If adjusted to less than 6" from floor, tables will not be NSF approved. Bracing can be ordered welded integrally to table. Legs shall have heavy gauge galvanized leg sockets screwed securely to underside of top and designed to provide maximum rigidity to 1-5/8" diameter, heavy gauge galvanized legs fitted with adjustable plastic bullet feet or stainless steel tubular legs fitted with adjustable stainless steel feet. As option, legs may be fitted with stainless steel feet. Tables 96" or longer to have 6 legs. Also available mounted on NSF approved 5" diameter swivel casters, two with locks, in lieu of adjustable feet. Shipped knocked down for quick, easy assembly.


Aerohot®

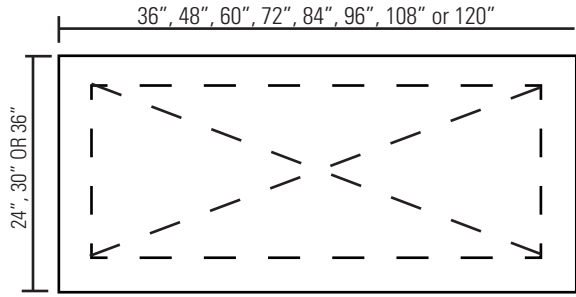

TOP VIEW

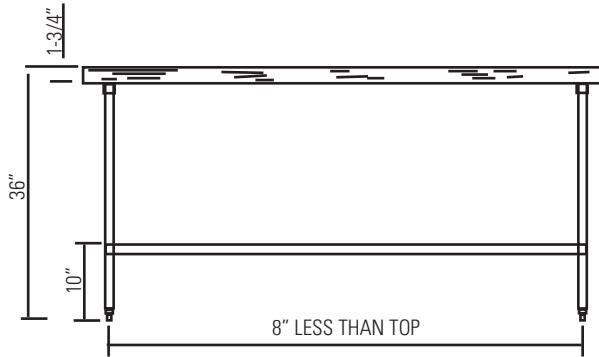

FRONT VIEW



8" LESS THAN TOP ON 30" - 36"
6" LESS THAN TOP ON 24"

SIDE VIEW

DUKE WORKTABLES MAPLE TOP TABLES

- 7121A** Galvanized undershelf/galvanized legs/plastic feet
- 7122A** Stainless steel undershelf/stainless steel legs & feet
- 7123** Galvanized tubular bracing/galvanized legs/plastic feet
- 7124** Stainless steel tubular bracing/stainless steel legs & feet

NOTE: To order tables, add numbers in top widths and top lengths columns to model number for specific table sizes.

EXAMPLE: 8121A-2436 for 24" wide x 36" long 7121A table

DIMENSIONS:

Maple Top Tables with Adjustable Undershelf - Height: 36" (91.4 cm)

Freight Class: 55

Model	Top Width		Cube Feet Crated							
	in.	cm	36"/91.4 cm	48"/121.9 cm	60"/152.4 cm	72"/182.9 cm	84"/213.4 cm	96"/243.8 cm	108"/274.3 cm	120"/304.8 cm
7121A Galv. Undershelf Galv Legs	24	61.0	21.8	28.6	35.5	42.4	49.2	56.1	61.0	69.8
	30	76.2	26.8	35.2	43.7	52.1	60.6	69.0	77.5	86.0
	36	91.4	31.8	33.5	51.9	61.9	72.0	82.0	92.0	102.1
7122A S/S Undershelf S/S Legs	24	61.0	21.8	28.6	35.5	42.4	49.2	56.1	63.0	69.8
	30	76.2	26.8	35.2	43.7	52.1	60.6	69.0	77.5	86.0
	36	91.4	31.8	33.5	51.9	61.9	72.0	82.0	92.0	102.1

Maple Top Tables with Tubular Base - Height: 36" (91.4 cm)

Model	Top Width		Cube Feet Crated							
	in.	cm	36"/91.4 cm	48"/121.9 cm	60"/152.4 cm	72"/182.9 cm	84"/213.4 cm	96"/243.8 cm	108"/274.3 cm	120"/304.8 cm
7123 Galv. Tubular Bracing Galv Legs	24	61.0	21.8	28.6	35.5	42.4	49.2	56.1	61.0	69.8
	30	76.2	26.8	35.2	43.7	52.1	60.6	69.0	77.5	86.0
	36	91.4	31.8	33.5	51.9	61.9	72.0	82.0	92.0	102.1
7124 S/S Tubular Bracing S/S Legs	24	61.0	21.8	28.6	35.5	42.4	49.2	56.1	63.0	69.8
	30	76.2	26.8	35.2	43.7	52.1	60.6	69.0	77.5	86.0
	36	91.4	31.8	33.5	51.9	61.9	72.0	82.0	92.0	102.1



DUKE MANUFACTURING CO.

2305 N. Broadway
St. Louis, MO 63102

800.735.3853 Toll Free
800.231.1130 In Missouri
314.231.5074 Fax
www.dukemfg.com

Specification subject to change