



NEO® 140/190 Undercounter Ice Machines

Models

URF-0140A

UYF-0140A

UDF-0190A

UDF-0140A

UYF-0190A

capacity.

and less expensive to operate.

slow periods or days when you're closed.

AlphaSan added to key internal components.



- Ranging from 137 lbs. (62 kg) to 190 lbs. (79 kg) daily ice
- Only 26" (66.04 cm) wide, 28.50" (72.4 cm) deep, and 38.50" (97.8 cm) high on 6" (15.24 cm) legs
- Cabinet volume 3.037 ft³ (0.086 m³)
- 90 lb. (40.0 Kg) ice storage capacity*
- * Application capacity based on: 90% volume x 33lbs/ft3 average density of ice.

Specifications

BTU Per Hour:

U-140: 2,150 (average) 2,600 (peak)

U-190: 2,150 (average) 2,600 (peak)

Compressor:

Nominal rating: .42 HP

Refrigerant:

R-404A

Operating Limits:

- · Ambient Temperature Range: 40° to 110°F (4.4° to 43.3°C)
- 45° to 90°F (4.4° to 32.2°C)
- Water Pressure Ice Maker Water In:

Min. 20 psi (137.9 kPA)

TEAR HARFS AND LIKEOR

cleaner, longer.

• Water Temperature Range:

Max. 80 psi (551.1 kPA)

Ice Machine Electric

115/60/1. (208-230/60/1 and 230/50/1 available.) 115/60/1 ice machines are factory pre-wired with a 6' (180 cm) power cord and NEMA 5-15P-plug configuration. 208-230/60/1 ice machines are factory pre-wired with a 6' (180 cm) power cord only, no plug is supplied.

NEO undercounter ice machines are designed to provide ice right where you need it - within reach. Improvements in Performance, Intelligence and Convenience make your ice machine easy to own

Performance – NEO produces more ice than ever before while using less water and energy. The storage bin provides industry leading

Intelligence – NEO provides feedback with full bin and service indicators. Delay function allows you to pause your machine for

Convenience - NEO offers a forward-sliding storage bin for easy access to refrigeration components without having to move the

entire ice machine. Smooth, sealed food-zone with removable water trough, distribution tube, and damper door for faster cleaning.

Available LuminIce® Growth Inhibitor extends cleaning intervals

by reducing yeast and bacteria growth keeping your ice machine

Total Amps:

U-140: 115/60/1: Air-cooled: 5 amps 208-230/60/1: Air-cooled: 2.5 amps

U-190: 115/60/1: Air-cooled: 6 amps 208-230/60/1: Air-cooled: 3 amps

Maximum fuse size:

Air-cooled: 15 amps

HACR-type circuit breakers can be used in place of fuses.

Ice Shape







Dice ½" x ½" x ½"



Regular (2.86 x 2.86 x 2.22 cm)









CERTIFIED BY DW












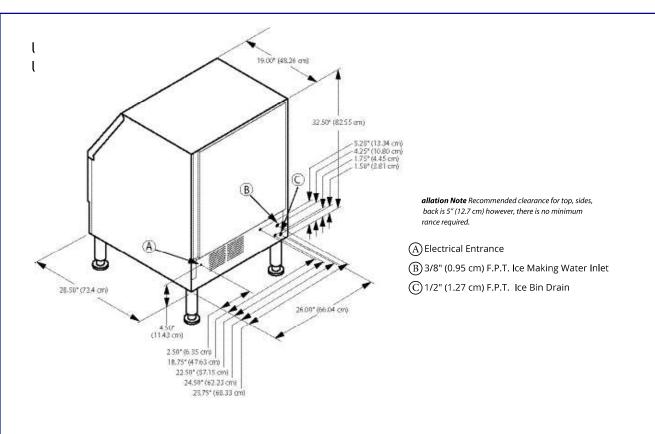

Specifications

		Ice Production 24 Hours			Power kWh/	Detable water usage	
Model	lce Shape	70°Air/50° 21°Air/10°		90°Air/70°F Water 32°Air/21°C Water		@ 90°/70°F 32°/21°C	Potable water usage gal/100 lbs. ice @90/70°F
URF-0140A	regular 🦣	127 lbs	58 kg	95 lbs	43 kg	9.6	16.7
UDF-0140A	dice 🧓	135 lbs	61 kg	95 lbs	43 kg	9.8	16.7
UYF-0140A	half-dice 🦣	137 lbs	62 kg	100 lbs	45 kg	9.2	16.7
UDF-0190A	dice 🥘	198 lbs	90 kg	140 lbs	64 kg	8.4	23.9
UYF-0190A	half-dice 🦣	193 lbs	88 kg	140 lbs	64 kg	8.3	21.6

Standard 6" / 15.24 cm adjustable flange foot - gray painted legs included. Standard plastic NEO ice scoop included.

Air Flow



Air in right, air out left, no side vents. Great for installation under countertops and next to other equipment.

Removable Bin

Air Filter



Simple, toolfree removal for quick access during routine cleaning and maintenance.

Welbilt reserves the right to make changes to the design or specifications without prior notice. ©2018 Manitowoc

2110 South 26th Street Manitowoc, WI 54220 Tel: 1.920.682.0161 Fax: 1.920.683.7589 www.manitowocice.com 6501A 01/18

