

**CONVERTIBLE SERVICE OVER
REFRIGERATED SELF-SERVE
MODEL ESSRC-5052
ESSRC-5952
ESSRC-7752**



Display a variety of products and serve more customers with presentation and value in mind without sacrificing performance. Cases are available in lengths of 50", 59", and 77".

STANDARD FEATURES

Refrigerated Self-Serve Bottom Display


- Steel base construction with black exterior.
- Black interior.
- Horizontal shielded top light.
- Two-tier black display step.
- Thermometer.
- Condensator evaporator provided for a totally self-contained system.
- Easy clean, rustproof insulated evaporator coil compartment.
- Easily accessible light switch and adjustable power switch.
- Average case temperature of 38° to 40°F is maintained.

- Rear access to the refrigeration system for quick and easy service.
- R404 Refrigerant.
- Adjustable leg levelers.
- Cord and plug.

Service Top Display

- Baffle system converts display from non-refrigerated to refrigerated.
- Clear glass rear sliding doors.
- Adjustable black wire shelf.
- Shielded top and shelf light.
- Thermometer.

ELEMENTS™ CONVERTIBLE SERVICE OVER REFRIGERATED SELF-SERVE

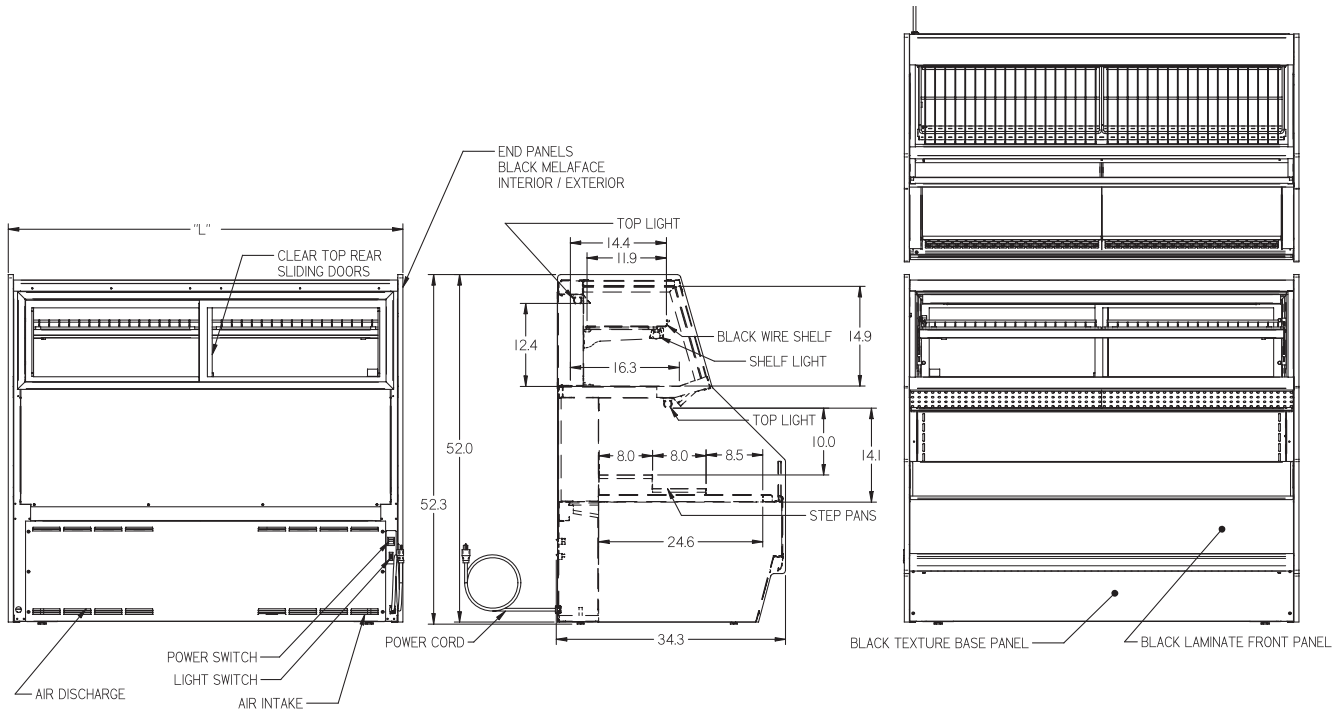

SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	*Self-Contained with Condensate Pan	Remote 120/60/1 with Condensate Pan
ESSRC-5052	50" x 34" x 52"	720	230/60/1 - 1/2 HP - 10 AMPS	10 AMPS
ESSRC-5952	59" x 34" x 52"	845	230/60/1 - 1/2 HP - 12 AMPS	12 AMPS
ESSRC-7752	77" x 34" x 52"	1,010	230/60/1- 3/4 HP - 13 AMPS	12 AMPS

- Refrigerated cases are designed to operate in a maximum environment of 75° F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.



Look to Federal for Innovative Merchandising



The Signature of Quality®

**Federal Industries
A Standex Company
215 Federal Avenue
Belleville WI 53508-9201
Phone: 800-356-4206
Fax: 608-424-3234
Email: geninfo@federalind.com
Web Site: www.federalind.com**