

Project #:			
-			
Item #:			



Model HDC18SD2 shown

Heavy Volume This category of microwave is ideal for...

Applications:

- Quick service restaurants
- Fast casual dining
- Bars & grills

Through put potential:

- Pre cooked frozen bacon, 700+ slices per hour
- 6 oz. portion of refrigerated Macaroni & Cheese, 40+ portions per hour
- 1 lb. batch of fresh shrimp, 30+ batches per hour
- 1 baked potato, 20+ per hour

Defrost:

- Defrosts most frozen food products

All ACP, Inc. commercial ovens are backed by our Culinary Center. Call us with any question regarding food preparation, menu development and cooking times. 866-426-2621.



Heavy Volume

Amana® Commercial Microwave Model HDC18SD2

Power Output

- 1800 watts of power.
- 11 power levels for consistent, delicious results for frozen, refrigerated and fresh foods - from the freezer to table in minutes.
- Unique method of energy distribution provides superior even heating throughout the cavity.
- Interlock switch assembly is engineered for maximum durability and long life.

Easy to Use


- Up to 100 programmable menu items simplifies cooking and ensures consistent results.
- Four stage cooking option with one-touch programming.
 Reduces prep time, labor and food waste while providing consistent results.
- Controls are user friendly and require minimal training.
- Multiple quantity pad calculates the proper cook times for multiple portions.
- Automatic Voltage Sensor adjusts to the power supply.
- Ample .6 cubic ft. (17 liter) capacity accommodates a standard half-sized pan.
- Stackable to save valuable counter space.
- Gasket sealed ceramic trey to reduce plate-to-shelf edge impact and keep spills contained.

Easy to Maintain


- Braille touch pads are ADA compliant.
- Stainless steel exterior and interior for easy cleaning and a professional look.
- Constructed to withstand the foodservice environment.
- Removable, cleanable air filter and clean filter reminder protects oven components.
- Backed by the ACP, Inc. 24/7 ComServ Support Center, 866-426-2621.
- ETL Listed.









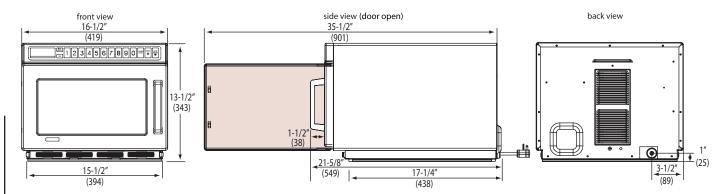

Installation Clearances - Top: 2" (51), Sides: 1" (25), Back: None

Drawings available from KCL CADlog - techs@kclcad.com

Specifications				
Model	HDC18SD	UPC Code 7198	381159379	
Configuration	Countertop			
Control System	Touch			
Programmable Control Pads	10			
Braille	Yes			
Settings Programmable	100			
Max. Cooking Time	60:00			
Power Levels	11			
Defrost	Yes, power level 2			
Time Entry Option	Yes			
Microwave Distribution	Double rotating antenna, top and bottom			
Magnetrons	2			
Display	LED			
Stackable	Yes			
Stage Cooking	Yes, 4			
Door Opening	Grab and pull handle			
Signal	Adjustable, end of cycle			
Air Filter	Yes, removable, with clean filter reminder			
Automatic Voltage Sensor	Yes			
Multiple Portion Setting	Yes, up to 2 pc	ortions		
Exterior Dimensions	H 13 ½" (343)	W 16 ½" (419)	D** 21 %" (549)	
Cavity Dimensions	H 6 ¾" (171)	W 13" (330)	D 12" (305)	
Door Depth	37" (940 mm), 90°+ door open			
Usable Cavity Space	.6 cubic ft. (17 liter)			
Exterior Finish	Stainless steel			
Interior Finish	Stainless steel with gasket sealed ceramic tray			
Power Consumption	3000 W, 14.4 A			
Power Output*	1800 W* Microwave			
Power Source	208 - 240V, 60 Hz, 20 A single phase			
Plug Configuration / Cord	NEMA 6-20	5′ 6″ (1.7m)		
Frequency	2450 MHz			
Product Weight	68 lbs. (31 kg.)			
Ship weight (approx.)	74 lbs. (34 kg.)			
Shipping Carton Size	H 18 %" (473)	W 21 %" (556)	D 24 %" (625)	
UPS Shippable	Yes			

Specifications

Commercial microwave 10 touch pad control panel shall be programmable with the ability to program up to 100 menu items and shall have automatic cooking capability for up to two portions. Cooking timer shall be 60 minute, countdown style with a time entry option and an adjustable end of cycle audible signal. LED display shall be a backlit. There shall be 11 power levels, 4 cooking stages and defrost mode at 20% power or power level 2. Microwave output shall be 1800 watts distributed by two magnetrons each with a rotating antenna to provide superior even heating throughout the cavity. An automatic voltage sensor shall accommodate both 208 and 240 volts. Heavy duty solid door (no window) shall have a grab and pull handle and a 90°+ opening for easy access. The large .6 cubic ft. (17 liter) cavity shall accommodate a standard 6" (152 mm) deep half-sized pan. Gasket sealed ceramic tray to reduce plate-to-shelf edge impact. Oven shall have a stainless steel interior and exterior and be stackable to save counter and shelf space. Oven shall have removable, cleanable splatter shield. Air filter shall be easily accessible and removable from the front of the oven and have a "clean filter" reminder feature. Microwave oven shall comply with standards set by the U.S Department of Health and Human Services, ETL for safety and sanitation.





Intertek Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at:

www.acpsolutions.com/warranty

All products are backed by the ACP, Inc. 24/7 ComServ Support Center.





Measurements in () are millimeters

- * IEC 60705 Tested
- ** Includes handle

Part No. 20154658 Updated 6/13/16 **Original Instructions**

