Thermo-Finisher®
Food Finishers

Models: TF-1919, -4619, -461R
          TFW-461R
          TFWM36-3900, -3939
          TFWM42-3900, -3939

The Hatco Thermo-Finisher® is designed to rapidly heat or thermalize a range of food products which allows operators to serve customers faster, thereby improving customer satisfaction. The Thermo-Finisher is perfect for melting toppings or finishing soup and foods like Mexican entrees, nachos and potato skins, as well as toasting buns and breads. It also thermalizes frozen foods such as appetizers, french fries and pizza. The Thermo-Finisher can also be used to heat plates prior to serving.

Standard features

- The NEW TFWM36 models are 6.37" (162 mm) shorter in width, to accommodate smaller spaces

- The high efficiency allows the operator to thermalize and complete entrees in less than half the time of conventional methods

- Standby mode saves energy, and the exclusive Instant-On feature assures the unit is ready to use, with no warm-up time needed

- TFWM models feature three bays with on demand plate activated technology with adjustable heat intensity

- TFWM models: removable bay dividers allow you to accomdate wider dishes

- Kitchen staff can be assured of consistent product preparation with up to five preprogrammed recipe times

- Locate unit indoors where ambient air temperature is a minimum of 70ºF (21ºC) and a maximum of 104ºF (40ºC)

- Stainless steel interior and heay-duty glass surfaces cover the heat source making it durable and easy to clean

TFW-461R

TF-4619
with accessory pan

TFWM42-3900
with removable
stainless steel
dividers

Options (available at time of purchase only)

Designer Color Side Panels (TF and TFW models only)
   Non-standard colors are non-returnable – Black standard
   ☐ Warm Red

Designer Color Side Panels (TFWM models only)
   Non-standard colors are non-returnable – Warm Red standard
   ☐ Black   ☐ Stainless Steel

Cord and Plug (TFWM42-3900 Model only)
   ☐ Three phase, 30 amp (NEMA L15-30P)
   ☐ Single phase, 50 amp (NEMA 6-50P)

Accessories

☐ 10" (254 mm) Saute Pan with tapered sides
☐ 18"W x 13"D (457 x 330 mm) Half-Size Sheet Pan

For operation, location and safety information, please refer to the Installation & Operating Manual.

c (UL) us
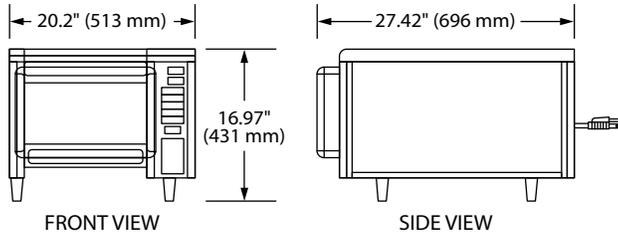
(UL) CLASSIFIED
ANSI/NSF 4

MADE IN
THE USA

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
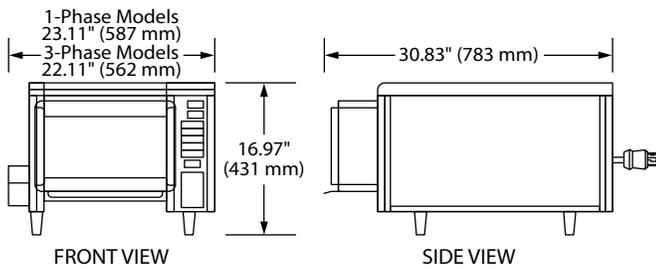(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com

Form No. TF Spec Sheet   Page 1 of 3   December 2019

TF-1919 & TF-4619

20.2" (513 mm)
27.42" (696 mm)
16.97" (431 mm)

FRONT VIEW

SIDE VIEW

TF-461R

1-Phase Models 23.11" (587 mm)
3-Phase Models 22.11" (562 mm)
30.83" (783 mm)
16.97" (431 mm)

FRONT VIEW

SIDE VIEW

TFW-461R

25.45" (646 mm)
20.83" (529 mm)
14.56" (370 mm)
18.51" (470 mm)

FRONT VIEW

SIDE VIEW
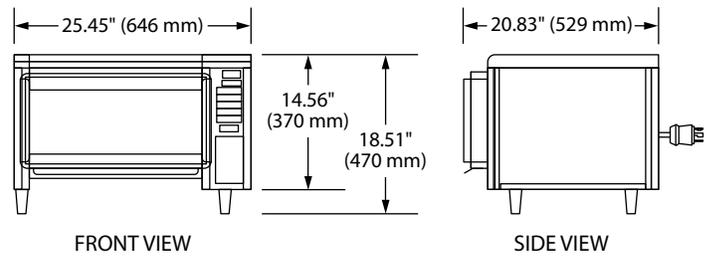
TFWM36-3900 and TFWM42-3900

Optional Cord & Plug
Standard Conduit

TFWM36-3900 35.82" (910 mm)
TFWM42-3900 42.19" (1072 mm)

16.54" (420 mm)

TFWM36-3900 18.34" (466 mm)
TFWM42-3900 18.16" (461 mm)

FRONT VIEW

SIDE VIEW
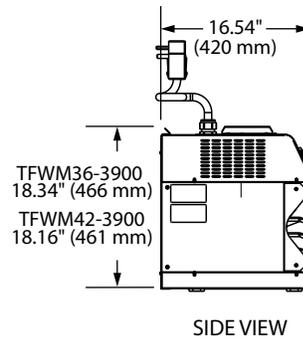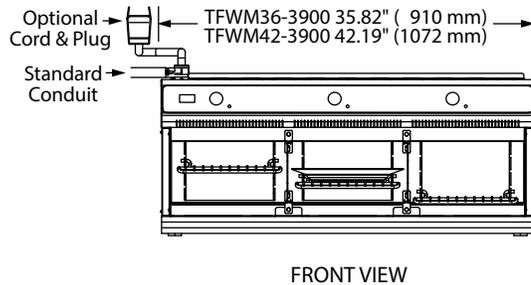
TFWM36-3939 and TFWM42-3939
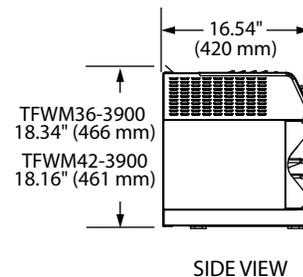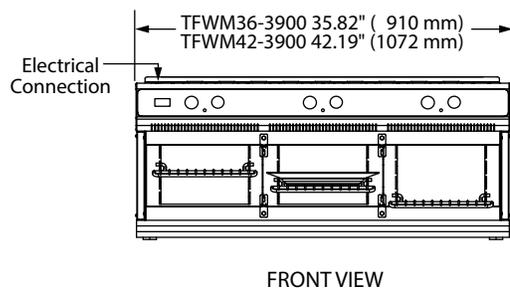
Electrical Connection

TFWM36-3900 35.82" (910 mm)
TFWM42-3900 42.19" (1072 mm)

16.54" (420 mm)

TFWM36-3900 18.34" (466 mm)
TFWM42-3900 18.16" (461 mm)

FRONT VIEW

SIDE VIEW

SPECIFICATIONS
Thermo-Finisher® Food Finishers

The shaded areas contain electrical information for International models

| Model	Dimensions (W x D x H)	Cavity Opening (W x D x H)	Elements	Voltage	Phase	Watts	Amps	Plug	Cord Location	Ship Weight*
TF-1919	20.2" x 27.42" x 16.97" (513 x 696 x 431 mm)	13" x 18" x 6.38" (330 x 457 x 162 mm)	1 upper, 1 lower	208	Single	4800	23.1	NEMA 6-30P	Top left side, near center	86 lbs. (39 kg)
				240		5000	20.8			
				220	Single	4201	19.1	None†	Top left side, near center	86 lbs. (39 kg)
				240		5000	20.8	NEMA 6-30P		
				380		4532	11.9	4 wire cord†		
TF-4619	20.2" x 27.42" x 16.97" (513 x 696 x 431 mm)	13" x 18" x 6.38" (330 x 457 x 162 mm)	4 upper, 1 lower	208	Three	7200	20.1	NEMA L15-30P	Top left side, near center	90 lbs. (41 kg)
				240		7300	17.6			
				220	Three	6134	16.1	None†	Top left side, near center	90 lbs. (41 kg)
				240/415		7300	10.3			
				380		6588	10.1	5 wire cord†		
TF-461R	Single Phase: 23.11" x 30.83" x 16.97" (587 x 783 x 431 mm) Three Phase: 22.11" x 30.83" x 16.97" (562 x 783 x 431 mm)	13" x 18" x 6.38" (330 x 457 x 162 mm)	4 upper, 1 lower	208	Single	6250	30.0	NEMA 6-50P	Top left side, near center	90 lbs. (41 kg)
					Three		19.0	NEMA L15-30P		
				240	Single	8320	34.7	NEMA 6-50P		
				240	Three		21.9	NEMA L15-30P		
				220	Three	6992	20.1	None†	Top left side, near center	90 lbs. (41 kg)
TFW-461R	25.45" x 20.83" x 18.51"● (646 x 529 x 470 mm)	18" x 13" x 6.38" (457 x 330 x 162 mm)	4 upper, 1 lower	208	Single	6250	30.0	NEMA 6-50P	Top left side, near center	90 lbs. (41 kg)
					Three		19.0	NEMA L15-30P		
				240	Single	8320	34.7	NEMA 6-50P		
					Three		21.9	NEMA L15-30P		
				220	Single	6992	31.8	None†	Top left side, near center	90 lbs. (41 kg)
					Three		20.1			
TFWM36-3900	35.82" x 16.54" x 18.34" (910 x 420 x 466 mm)	Left: 11.12" x 15" x 6.38" (282 x 394 x 162 mm) Middle: 11.43" x 15" x 6.38" (290 x 394 x 162 mm) Right: 11.12" x 15" x 6.38" (282 x 394 x 162 mm)	3 upper	208	Single	7200	34.6	NEMA 6-50P	Top of unit, back left side	165 lbs. (75 kg)
					Three		20.0	NEMA L15-30P		
				240	Single	7500	31.3	NEMA 6-50P		
					Three		18.0	NEMA L15-30P		
TFWM36-3939	35.82" x 16.54" x 18.34" (910 x 420 x 466 mm)	Left: 11.12" x 15" x 6.38" (282 x 394 x 162 mm) Middle: 11.43" x 15" x 6.38" (290 x 394 x 162 mm) Right: 11.12" x 15" x 6.38" (282 x 394 x 162 mm)	3 upper, 3 lower	208	Three	14400	40.0	Hardwired	Top of unit, back left side	170 lbs. (77 kg)
				240		15000	36.1			
TFWM42-3900	42.19" x 16.54" x 18.16" (1072 x 420 x 461 mm)	Left: 13.24" x 15.5" x 6.38" (336 x 394 x 162 mm) Middle: 13.55" x 15.5"x 6.38" (344 x 394 x 162 mm) Right: 13.24" x 15.5"x 6.38" (336 x 394 x 162 mm)	3 upper	208	Single	7200	34.6	NEMA 6-50P	Top of unit, back left side	170 lbs. (77 kg)
					Three		20.0	NEMA L15-30P		
				240	Single	7500	31.3	NEMA 6-50P		
					Three		18.0	NEMA L15-30P		
TFWM42-3939	42.19" x 16.54" x 18.16" (1072 x 420 x 461 mm)	Left: 13.24" x 15.5" x 6.38" (336 x 394 x 162 mm) Middle: 13.55" x 15.5"x 6.38" (344 x 394 x 162 mm) Right: 13.24" x 15.5"x 6.38" (336 x 394 x 162 mm)	3 upper, 3 lower	208	Three	14400	40.0	Hardwired	Top of unit, back left side	177 lbs. (80 kg)
				240		15000	36.1			

* Shipping weight includes packaging. (TFWM36-3900 and TFWM36-3939 weights are approximate)
† Power cord is attached without a plug
**●** Height includes 4" (102 mm) legs.

PLUG CONFIGURATIONS

NEMA 6-30P   **NEMA 6-50P**   **NEMA L15-30P**

PRODUCT SPECS
Thermo-Finisher® Food Finishers

The Food-Finisher shall be A Thermo-Finisher® model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Food Finisher shall be rated at ... watts, ... volts, and be ... inches (millimeters) in overall width. It shall consist of stainless steel interior with fast heating infrared ribbon elements. Special microprocessor to control the temperatue and heating time (excludes TFWM models). Additionally, TFWM models shall consist of cord and plug option (TFWM42-3900 and TFWM36-3900 models only) and countertop unit converter kit.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com

Form No. TF Spec Sheet   Page 3 of 3   December 2019