



Project \_\_\_\_\_  
 Item # \_\_\_\_\_  
 Quantity \_\_\_\_\_

# Glo-Ray® Curved Infrared Strip Heaters

Models:

GR5A-18, -24, -30, -36, -42, -48, -54, -60, -66, -72  
 GR5AH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72


This stylish patented design, based on our signature Glo-Ray® strip heaters, is the perfect solution for your front-of-the-house applications. Superb for buffet and serving lines, the sleek curved design minimizes its size while warming the products below.

The entire holding surface is heated evenly with no “cold” spots thanks to Hatco's dependable infrared element technology.

Hatco's wide array of colors help provide the right look for your venue.

## Standard features

- Narrow, curved design: 2"H by 6"D (51 x 150 mm) uses a very small footprint.
- Lengths available from 18"-72" (457- 1829 mm) in 6" (152 mm) increments
- Available in Standard and High Watt units
- Patented housing design
- End panels and angle mounting brackets match unit color
- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food
- Mounting Brackets, 3' (914 mm) Conduit and 5' (1524 mm) power leads are standard (included) – Non-adjustable Tubular Stands, which attach to countertop or ceiling, are optional
- Metal Sheathed Element part guaranteed against burnout and breakage for two years

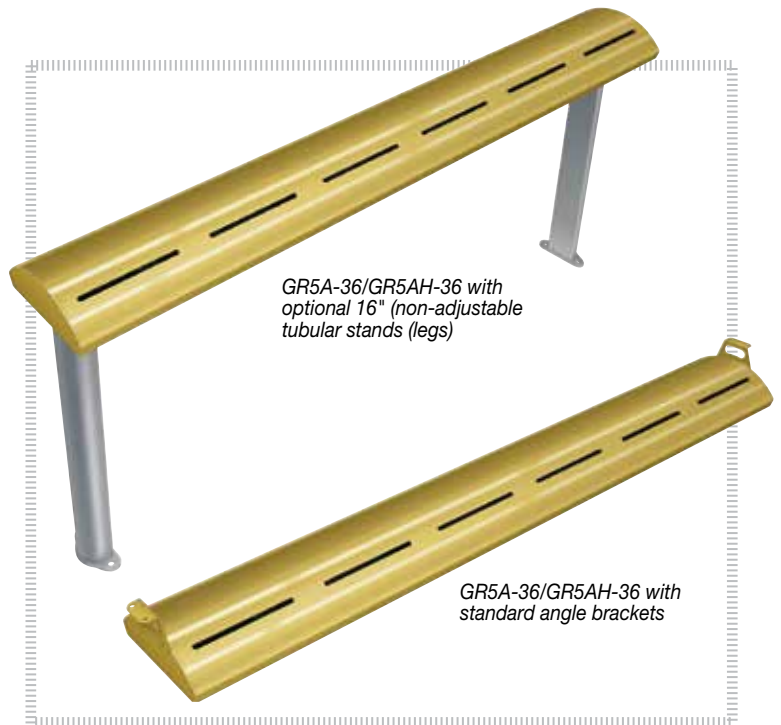

## Options (available at time of purchase only)

Housing color (Clear Anodized standard) – End panels and mounting brackets match unit color

Designer Color†

- Warm Red    Black    Gray Granite    White Granite  
 Navy Blue    Hunter Green    Antique Copper

Gloss Finish†

- Radiant Red    Glossy Gray    Bold Black    Gleaming Gold  
 Brilliant Blue

Non-adjustable Tubular Stands (Angle Brackets standard) – choose style, clearance and color below (Clear Anodized standard)

- Bottom Mount, attach to counter    Side mount leg for bottom mount  
 Side mount leg for top mount installation  
 10' (254 mm)    12' (305 mm)    14' (356 mm)    16' (406 mm)  
 Designer Color† or Gloss Finish† to match unit color for Non-adjustable Tubular Stands

Power Wire Lead Length – 5' (1524 mm) is standard, must specify total lead length required (The standard LED lead length is 1.5' (457 mm) longer than the power lead length)

- 6' - 10' (1829 - 3048 mm) total power Lead Length  
 11' - 15' ( 3353 - 4572 mm) total power Lead Length

†Non-standard colors are non-returnable

**For operation, location and safety information, please refer to the Installation & Operating Manual.**






# Glo-Ray® Curved Infrared Strip Heaters

Models: GR5A-18, -24, -30, -36, -42, -48, -54, -60, -66 -72

GR5AH-18, -24, -30, -36, -42, -48, -54, -60, -66 -72

## GR5A, GR5AH

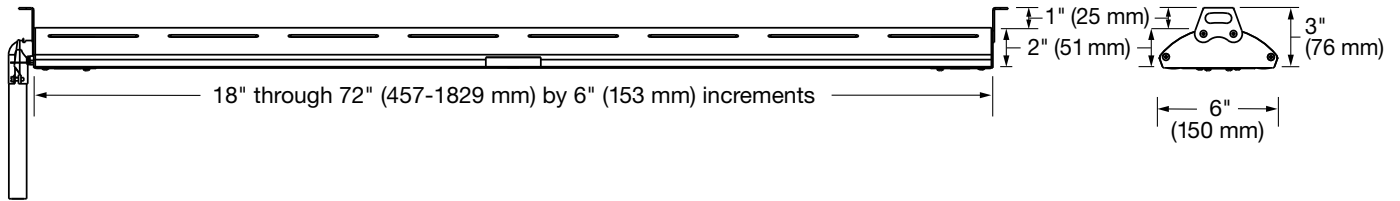

### SPECIFICATIONS

#### Glo-Ray® Curved Infrared Strip Heaters

Phase: Single

The shaded areas contain electrical information for international models only

Standard Watt					High Watt					All Models
Model	Volts	Watts	Amps	Weight*	Model	Volts	Watts	Amps	Weight*	Dimensions W x D x H
GR5A-18	120	250	2.1	10 lbs. (5 kg.)	GR5AH-18	120	350	2.9	16 lbs. (8 kg.)	18" x 6" x 2" (457 x 150 x 51 mm)
	208		1.2			1.7				
	220		1.1			1.6				
	240		1.0			1.5				
	220-230 (CE) <sup>E</sup>	250-273	1.1-1.2			220-230 (CE) <sup>E</sup>	350-383	1.6-1.7		
230-240 (CE) <sup>EE</sup>	230-250	1.0-1.0	230-240 (CE) <sup>EE</sup>	321-350	1.4-1.5					
GR5A-24	120	350	2.9	14 lbs. (7 kg.)	GR5AH-24	120	500	4.2	17 lbs. (8 kg.)	24" x 6" x 2" (610 x 150 x 51 mm)
	208		1.7			2.4				
	220		1.6			2.3				
	240		1.4			2.1				
	220-230 (CE) <sup>E</sup>	350-383	1.6-1.7			220-230 (CE) <sup>E</sup>	500-546	2.3-2.4		
230-240 (CE) <sup>EE</sup>	321-350	1.4-1.5	230-240 (CE) <sup>EE</sup>	459-500	2.0-2.1					
GR5A-30	120	450	3.8	14 lbs. (7 kg.)	GR5AH-30	120	660	5.5	16 lbs. (8 kg.)	30" x 6" x 2" (762 x 150 x 51 mm)
	208		2.2			3.2				
	220		2.0			3.0				
	240		1.9			2.8				
	220-230 (CE) <sup>E</sup>	450-492	2.0-2.1			220-230 (CE) <sup>E</sup>	650-710	3.0-3.1		
230-240 (CE) <sup>EE</sup>	413-450	1.8-1.9	230-240 (CE) <sup>EE</sup>	597-650	2.6-2.7					
GR5A-36	120	575	4.8	12 lbs. (6 kg.)	GR5AH-36	120	800	6.7	13 lbs. (6 kg.)	36" x 6" x 2" (919 x 150 x 51 mm)
	208		2.8			3.8				
	220		2.6			3.6				
	240		2.4			3.3				
	220-230 (CE) <sup>E</sup>	575-628	2.6-2.7			220-230 (CE) <sup>E</sup>	800-874	3.6-3.8		
230-240 (CE) <sup>EE</sup>	528-575	2.3-2.4	230-240 (CE) <sup>EE</sup>	735-800	3.2-3.3					
GR5A-42	120	675	5.6	13 lbs. (6 kg.)	GR5AH-42	120	950	7.9	16 lbs. (8 kg.)	42" x 6" x 2" (1067 x 150 x 51 mm)
	208		3.2			4.6				
	220		3.1			4.3				
	240		2.8			4.0				
	220-230 (CE) <sup>E</sup>	675-738	3.1-3.2			220-230 (CE) <sup>E</sup>	950-1038	4.3-4.5		
230-240 (CE) <sup>EE</sup>	620-675	2.7-2.8	230-240 (CE) <sup>EE</sup>	872-950	3.8-4.0					
GR5A-48	120	800	6.7	18 lbs. (9 kg.)	GR5AH-48	120	1100	9.2	15 lbs. (7 kg.)	48" x 6" x 2" (1219 x 150 x 51 mm)
	208		3.8			5.3				
	220		3.6			5.0				
	240		3.3			4.6				
	220-230 (CE) <sup>E</sup>	800-874	3.6-3.8			220-230 (CE) <sup>E</sup>	1100-1202	5.0-5.2		
230-240 (CE) <sup>EE</sup>	735-800	3.2-3.3	230-240 (CE) <sup>EE</sup>	1010-1100	4.4-4.6					
GR5A-54	120	925	7.7	17 lbs. (8 kg.)	GR5AH-54	120	1250	10.4	20 lbs. (10 kg.)	54" x 6" x 2" (1372 x 150 x 51 mm)
	208		4.4			6.0				
	220		4.2			5.7				
	240		3.9			5.2				
	220-230 (CE) <sup>E</sup>	925-1011	4.2-4.4			220-230 (CE) <sup>E</sup>	1250-1366	5.7-5.9		
230-240 (CE) <sup>EE</sup>	850-925	3.7-3.9	230-240 (CE) <sup>EE</sup>	1148-1250	5.0-5.2					
GR5A-60	120	1050	8.8	22 lbs. (10 kg.)	GR5AH-60	120	1400	11.7	20 lbs. (10 kg.)	60" x 6" x 2" (1524 x 150 x 51 mm)
	208		5.0			6.7				
	220		4.8			6.4				
	240		4.4			5.8				
	220-230 (CE) <sup>E</sup>	1050-1148	4.8-5.0			220-230 (CE) <sup>E</sup>	1400-1530	6.4-6.7		
230-240 (CE) <sup>EE</sup>	964-1050	4.2-4.4	230-240 (CE) <sup>EE</sup>	1286-1400	5.6-5.8					

\* Weights are approximate and do not include shipping materials.

<sup>E</sup> Uses 220V element. <sup>EE</sup> Uses 240V element. <sup>0</sup>Infinite switch not available

**HATCO CORPORATION** | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
 (800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com



# Glo-Ray® Curved Infrared Strip Heaters

Models: GR5A-18, -24, -30, -36, -42, -48, -54, -60, -66 -72

GR5AH-18, -24, -30, -36, -42, -48, -54, -60, -66 -72

## SPECIFICATIONS Glo-Ray® Curved Infrared Strip Heaters Phase: Single

The shaded areas contain electrical information for international models only

Standard Watt					High Watt					All Models
Model	Volts	Watts	Amps	Weight*	Model	Volts	Watts	Amps	Weight*	Dimensions W x D x H
GR5A-66	120	1160	9.7	32 lbs. (15 kg.)	GR5AH-66	120	1560	13.0 <sup>o</sup>	25 lbs. (12 kg.)	66" x 6" x 2" (1675 x 150 x 51 mm)
	208		5.6			7.5				
	220		5.3			7.1				
	240		4.8			6.2				
	220-230 (CE) <sup>E</sup>		5.3-5.5			7.1-7.4				
	230-240 (CE) <sup>EE</sup>	4.6-4.8	6.2-6.5							
GR5A-72	120	1275	10.6	33 lbs. (15 kg.)	GR5AH-72	120	1725	14.4 <sup>o</sup>	25 lbs. (12 kg.)	72" x 6" x 2" (1829 x 150 x 51 mm)
	208		6.1			8.3				
	220		5.5			7.8				
	240		5.3			7.2				
	220-230 (CE) <sup>E</sup>		5.8-6.1			7.8-8.2				
	230-240 (CE) <sup>EE</sup>	5.1-5.3	6.9-7.2							

\* Weights are approximate and do not include shipping materials.

<sup>E</sup> Uses 220V element. <sup>EE</sup> Uses 240V element. <sup>o</sup>Infinite switch not available

## RECOMMENDED MOUNTING HEIGHTS

(Refer to the Installation section in the Installation and Operating Manual on the Hatco website)

Make sure countertop material is designed to withstand long periods of hot food holding temperatures. Contact manufacturer of countertop material for application information.

GR5A Series strip heaters can be installed over a steam table. Follow the minimum clearance requirements for non-combustible surroundings.

### Combustible surroundings (GR5A only)

- Below lowest portion of overshelf: 1" (25 mm) clearance
- Unit to surface below: 11" (279 mm)
- Back to wall: 1" (25 mm)

### Non-Combustible surroundings (GR5A, GR5AH)

- Below lowest portion of overshelf: 1" (25 mm) clearance
- Unit to surface below: 10" (254 mm)
- Back to wall: 0" (0 mm)

## REMOTE CONTROL ENCLOSURES

RMB series uses one Control Box per Strip Heater - If RMB2 series is used, multiple warmers can be controlled from one box (U.S., Canada only). For more details, see "Choose Remote Box" section listed under "Resources" on the Hatco website, or consult Price List.

Model	Width (W x D x H)
RMB-3A	5.5" x 3" x 2.5" (140 x 76 x 64 mm)
RMB-3B	
RMB-3C	
RMB-3D	
RMB-3F	
RMB-3G	
RMB-3H	9" x 3" x 2.5" (229 x 76 x 64 mm)
RMB-7F	
RMB-7G	
RMB-7H	11" x 4.5" x 5.5" (280 x 115 x 140 mm)
RMB2-1R	
RMB2-2R	14" x 4.5" x 5.5" (356 x 115 x 140 mm)

## PRODUCT SPECS

### Glo-Ray® Slim Curved Strip Heaters

The Curved Infrared Strip Heater shall be a Glo-Ray®, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Foodwarmer shall be a Glo-Ray model ... , rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width.

The Glo-Ray shall consist of Clear Anodized, Designer or Gloss Finish painted patented housing and include as standard equipment 3' (914 mm) conduit with 5' (1524 mm) power leads and mounting brackets. The infrared heating element

shall be tubular metal sheathed. The foodwarmer shall be factory assembled ready for electrical installation.

Options shall include choice of Designer color or Gloss Finish, extended power leads and Non-adjustable Tubular Stands in Bottom Mount or Side mount leg (in bottom mount or top mount installation).

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
(800) 558-0607 | (414) 671-6350 | www.hatcocorp.com | support@hatcocorp.com