

## **TRUE FOOD SERVICE** EQUIPMENT, INC.

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com Project Name:

Location: \_

Model #:

Location:		
Item #:	<i>Qty:</i>	
Model #		

### Model: GDM-14RF-LD

## **Glass Door Merchandiser:** Swing Door Radius Front Refrigerator with LED Lighting

200

# GDM-14RF-LD

AIA #

SIS #

- The world's #1 manufacturer of glass door merchandisers.
- Oversized, factory balanced, refrigeration system holds 33°F to 38°F (.5°C to 3.3°C).
- Exterior non-peel or chip black laminated vinyl; durable and permanent.
- Interior - attractive, NSF approved, white aluminum interior liner with stainless steel floor.
- Self closing door. Positive seal, torsion type closure system.
- "Low-E", double pane thermal insulated glass door assemblies with mitered plastic channel frames. The latest in energy efficient technology.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Entire cabinet structure is foamedin-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

#### Bottom mounted units feature

- "No stoop" lower shelf to maximize product visibility.
- Storage on top of cabinet.
- Þ Easily accessible condenser coil for cleaning.

## ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the nearest <sup>1</sup>/<sub>8</sub>" (millimeters rounded up to next whole number).

Scan code for video

			Cabinet Dimensions (inches) (mm)					NEMA	Cord Length (total ft.)	Crated Weight (lbs.)	
Model	Doors	Shelves	L	D†	H*	HP	Voltage	Amps		(	(kg)
GDM-14RF-LD	2	3	303⁄8	29¼	58	1⁄3	115/60/1	7.9	5-15P	9	295
			772	743	1474	N/A		N/A		2.74	134

† Depth does not include 2" (51 mm) for door handles and 7/8" (23 mm) for racking system.

\* Height does not include 5/8" (16 mm) for appliance rollers.

	APPROVALS:	AVAILABLE AT:
8/16 Printed in U.S.A.		

## Model:

## GDM-14RF-LD

# **Glass Door Merchandiser:**

Swing Door Radius Front Refrigerator with LED



## STANDARD FEATURES

#### DESIGN

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.

Lighting

#### **REFRIGERATION SYSTEM**

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) 134A refrigerant.
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser; maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C).
- Sealed, cast iron, self-lubricating evaporator fan motor(s) and larger fan blades give True merchandisers a more efficient low velocity, high volume airflow design. This unique design ensures faster temperature pull down of warm product, colder holding temperatures and faster recovery in high use situations.
- Bottom mounted condensing unit positioned for easy maintenance. "No stoop" lower shelf maximizes visibility by raising merchandised product to higher level.

#### **CABINET CONSTRUCTION**

- Exterior non-peel or chip black laminated vinyl; durable and permanent.
- Interior attractive, NSF approved, white aluminum liner with stainless steel floor.

- Insulation entire cabinet structure is foamed-in-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.
- Frame rail fitted with 5/8" (16mm) appliance rollers.
- Illuminated exterior sign panel. Variety of sign options available.

#### DOOR

- "Low-E", double pane thermal insulated glass door assemblies with mitered plastic channel frames. The latest in energy efficient technology.
- Each door fitted with 12" (305 mm) long extruded handle.
- Self closing door. Positive seal, torsion type closure system.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.

#### SHELVING

- Three (3) adjustable, heavy duty PVC coated wire shelves 25 11/16 "L x 20 1/2 "D (574 mm x 521 mm). Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on 1/2" (13 mm) increments.

#### LIGHTING

LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

#### **MODEL FEATURES**

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- See our website www.truemfg.com for latest color and sign offerings.
- Convenient clean-out drain built in cabinet floor.
- Listed under NSF-7 for the storage and/or display of packaged or bottled product.

#### **ELECTRICAL**


• Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



#### **OPTIONAL FEATURES/ACCESSORIES**

- Upcharge and lead times may apply.
- white exterior.
- Black aluminum interior liner with black shelving.
- Red wine thermostat.
- White wine thermostat.
- Chocolate thermostat.
- Padlock.
- Additional shelves.
- □ TrueFlex gravity feed organizers.
- Pricing strips.

# PLAN VIEW

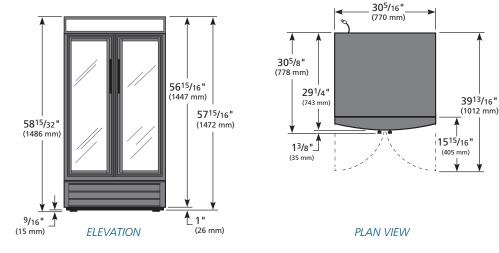

WARRANTY\* Three year warranty on all parts and labor and an additional 2 year

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER							
	MAN	Model	Elevation	Right	Plan	3D	Back
SPECIFICATIONS SUBJECT TO CHANGE	KCL	GDM-14RF-LD	TFD028E	TFD028S	TFD028P	TFD0283	
labor Williool Nonce				·	°	^	

#### **TRUE FOOD SERVICE EQUIPMENT**

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com