

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project:		
Model #:		
Item #:		
Available W/H:		Qty:
Approval:		
AIA#:	SIS #:	
CSI Section 11400		

Swing Door Freezers

Glass Door Merchandisers Freezers

Model : TGF-72FAB-N

___ FEATURES & BENEFITS =__

■ Digital temperature control & monitor system

- Keeps food products safe by maintaining constant temperatures.
- · Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks.
- · Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Rapid cool-down function (Turbo Freeze).
- · Smart defrost system will defrost as needed.
- Automatic evaporator fan motor delays.

■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Individual two cycle refrigeration systems

■ Triple pane heated glass doors

Equipped with unique triple-pane heated glass doors which enhance energy efficiency by preventing heat transfers and minimizing condensation. Lightweight door construction reduces door maintenance, bushing wear, and facilitates smooth door opening.

High-density polyurethane insulation

The entire cabinet structure is foamed-in-place using high density, HCFC free polyurethane insulation.

Ergonomically designed doors

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

LED advertising panel

LED lighting offers 5 times longer lasting life than fluorescents and conserves energy as well.

- Adjustable, heavy duty, PE (polyethylene) coated wire shelves
- LED interior lighting
- Freezer holds -10°F ~ 5°F for the best in frozen food preservation



2 & 3 Glass Door Freezers powered by 115V

Turbo Air's 2 & 3 Glass Door Freezers are powered by 115V. Not only is the 115V simple and easy to plug in and operate, it also saves customers over \$1,000 in electrical line installation for 220V powered glass door freezers. This feature is proof of our dedication to energy efficiency and the environment.













		intertex intertex						
	Model	Swing Door	CU./FT.	#of Shelves	НР	AMPS	Crated Weight (lbs.)	L x D*x H (inches)
7	TGF-72FAB-N	3	58.45	12	2/3 x 2	15.2	848	817/8 x 293/4 x 781/4

Swing Door Freezers

Model: TGF-72FAB-N

ELECTRICAL DATA					
Voltage	115/60/1				
Plug Type	NEMA 5-20P				
Full Load Amperes	15.2				
Compressor HP	2/3 x 2				
Cord Length (ft.)	7				
Refrigerant	R-290				
DIMENSIONAL DATA					
# of Doors	3				
Net Capacity (cu. ft.)	58.45				
Ext. Length Overall (in.)	817/8 (2079mm)				
Ext. Depth Overall (in.)*	293/4 (756mm)				
Ext. Height Overall (in.)	781/4 (1987mm)				
Int. Length Overall (in.)	78 (1981mm)				
Int. Depth Overall (in.)	241/8 (614mm)				
Int. Height Overall (in.)	603/8 (1535mm)				
# of Shelves	12				
Shelf Size (L x D) (in.)	25 x 221/4				
Net Weight (lbs.)	800				
Gross Weight (lbs.)	848				

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection. * Depth does not include 1-3/8" for glass door handles.

■ WARRANTY: 2 Year Parts and Labor Warranty **Additional 3 Year Warranty on Compressor**


STANDARD FEATURES


- · Anti-corrosion coated evaporator
- · Magnetic door gaskets

OPTIONAL ACCESSORIES

- 4" casters, 1/2" diameter & 13 TPI: G8F6500101 (non-brake), G8F6500201 (w/ brake)
- Additional PE coated wire shelf: 30278R0301
- Price tag channel: P0122K5300 (24-1/2"L)
- Sign panel (blank): 30242R2000

PLAN VIEW (unit: inch)



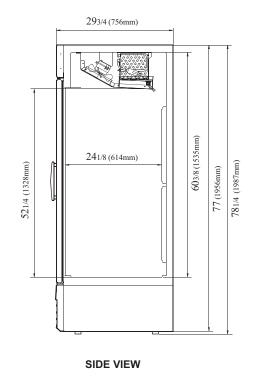

Ver.20220603











■ **Turbo Air**: 800-627-0032 ■ **GK**: 800-500-3519

■ Warranty: 800-381-7770 ■ AC: 888-900-1002









