

Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com

Project:		
Model #:		
Item #:		
Available W/H:		Qty:
Approval:		
AIA#:	SIS #:	
CSI Section 11400		

Glass Door Refrigerator

Reach-In Bottom Mount Super Deluxe Series

Model: TSR-35GSD-N

— FEATURES & BENEFITS —

Self-Cleaning Condenser

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

Digital temperature control & monitor system

- Keeps food products safe by maintaining constant temperatures
- · Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks
- · Early warning alarm program detects issues before malfunction occurs
- Digital display allows for easy monitoring
- · Programs interpret the condition of refrigeration systems by self-diagnosis
- · Rapid cool-down functions (Turbo cooling)
- · Automatic evaporator fan motor delays

Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

Stainless steel interior & exterior

The Turbo Air Super Deluxe glass door model is constructed with stainless steel exterior. The door is glass with AL frame. The interior is stainless steel that guarantees the utmost in cleanliness and long product life. The Super Deluxe adds a touch of style to the most refined setting.

Double pane glass doors with Low-E glass

Energy saving double pane glass doors are equipped with Low-emissivity glass, which reduces outer heat gain and decreases energy consumption. It enhances energy efficiency and minimizes condensation. Lightweight door construction also reduces door maintenance and bushing wear, which in turn facilitates smoother door opening.

High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, HCFC free polyurethane insulation.

Ergonomically designed doors

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. Self-closing features make this the ultimate choice in customer convenience.

- Adjustable, heavy duty, PE (polyethylene) coated wire shelves
- LED interior lighting
- Bottom mount compressor



Refrigerator holds 33°F ~ 38°F for the best in food preservation

Patented Self-Cleaning Condenser This product is equipped with a fine mesh filter to the front of the condenser to catch dust, and a rotating brush that moves up and down daily to remove excess













buildup outward and away.

ENERGY STAR® Qualified

Model	Swing Doors	CU./FT.	#of Shelves	НР	AMPS	Crated Weight (lbs.)	L x D*x H [†] (inches)
TSR-35GSD-N	2	29.19	6	1/3	3.1	400	391/2 x 303/8 x 781/4

(unit: inch)

Glass Door Refrigerator

Model: TSR-35GSD-N

ELECTRICAL DATA				
Voltage	115/60/1			
Plug Type	(i) NEMA-5-15P			
Full Load Amperes	3.1			
Compressor HP	1/3			
Feed Wires with Ground	3			
Cord Length (ft.)	7			
Refrigerant	R-290			
DIMENSIONAL DATA	DIMENSIONAL DATA			
# of Doors	2			
Net Capacity (cu. ft.)	29.19			
Ext. Length Overall (in.)	391/2 (1002mm)			
Ext. Depth Overall (in.)*	303/8 (770mm)			
Ext. Height Overall (in.)†	78 _{1/4} (1987mm)			
Int. Length Overall (in.)	351/2 (902mm)			
Int. Depth Overall (in.)	241/2 (620mm)			
Int. Height Overall (in.)	52 (1320mm)			
# of Shelves	6			
Shelf Size (L x D) (in.)	167/8 x 231/4			
Gross Weight (lbs.)	400			

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/2" for glass door handles.

† Height does not include 5" caster height or 6" optional legs.

■ WARRANTY: 5 Year Parts and Labor Warranty 7 Year Compressor Warranty


STANDARD FEATURES


- Anti-corrosion coated evaporator
- · Easy replaceable one piece magnetic door gaskets
- · Self-contained system
- · Solid and sturdy grille design
- Door locks
- 4" dia. swivel casters with locks on the front set

OPTIONAL ACCESSORIES

- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 6" stainless steel leg: 30221M0600
- Additional PE coated wire shelf: 30278Q0610 (Left), 30278Q0620 (Right)

PLAN VIEW



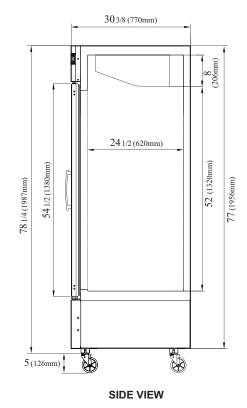

Ver.20230112











Qualified

■ **Turbo Air**: 800-627-0032 ■ **GK**: 800-500-3519











