



# HTC Eris Droid Screen Repair Guide

---

Touch Screen Digitizer Repair



For more instructional repair guides for other makes or models, view our full catalog of [Repair Guides!](#)

This step by step installation repair guide shows how to disassemble the HTC Droid Eris cell phone quickly and safely. The guide is designed by the Repairs Universe team and will help you install replacement parts to repair your damage phone.

**This guide will help you to install the following HTC Droid Eris replacement part(s):**

- [HTC Eris Droid Glass Touch Screen Digitizer Replacement](#)

**Tools Required:**

- [Safe Open Pry Tool](#)
- [Small Phillips Screwdriver](#)
- [T5 Screwdriver](#)

**HTC Droid Eris Take apart repair guide:**

- In order to disassemble HTC Droid Eris phone first of all you need to take off the back cover (battery cover) of the phone.



Figure 1

- After the removal of the battery cover you should be able to see four screws (one each at the four corners) as shown in figure 1. Unscrew these four screws from the back of the phone using the T5 screwdriver. Note the position of the screws and keep these screws at a safe place as you will need these while reassembling the phone.
- Once you have removed the four screws you need to pry off the back frame (which includes the battery tray) using the pry tool. It is better to start prying from the bottom (near USB Connector area). The back frame should come out quite easily with a little bit of prying.



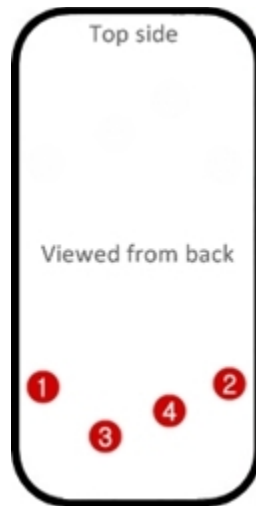


Figure 2

- There will now be four more screws to be removed. Figure 2 illustrates the positions of these screws. Remove these four screws using the small Phillips Screwdriver.
- Now remove the thin copper plate-like object that is covering the main board of the phone. It should come out quite easily.

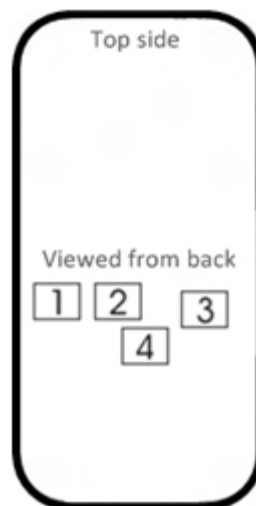


Figure 3

- You will have to undo the four connections using the pry tool. These can be easily located at the lower middle part of the phone as shown in the figure 3.
- Once you have undone the above-mentioned connections, the main board will come off easily. Also take out the trackball assembly.
- You will find a chip pasted at the back of the LCD and also connected with a cable. Just take it off from the back of LCD and put it aside. You do not need to remove the cable from chip.
- Now the LCD can come out. Carefully remove the LCD using the pry tool (do not pry too hard as this may damage the screen).

Your HTC Eris Droid is now disassembled and ready for replacement of part(s). Reverse the instructions above to reassemble your Eris Droid.

**Notice:**

Repairs Universe's guides are for **informational purposes only**. Please [click here for details](#).

Learn about [restrictions on reproduction and re-use](#) of Repairs Universe's repair/take-apart/installation guides, and about creating hyperlinks to our guides.

