



HTC Wildfire Screen Repair Guide

Touch Screen Repair



For more instructional repair guides for other makes or models, view our full catalog of [Repair Guides!](#)

This RepairsUniverse repair guide shows how to take apart and disassemble the HTC Wildfire cell phone. We go through the steps required to quickly and safely open your phone and install a replacement glass touch screen digitizer or LCD part. This guide has been designed and put together by the RepairsUniverse team.

This guide will help you to install the following HTC Wildfire replacement parts:

- [HTC Wildfire Touch Screen Digitizer Glass Replacement](#)
- [HTC Wildfire LCD Screen Replacement Display](#)
- and other [HTC Wildfire Replacement Parts](#)

Tools Required:

- [Safe Open Pry Tool](#)
- [Small Phillips Screwdriver](#)
- [Torx T5 Screwdriver](#)
- [Adhesive Strips](#) (For Touch Screen Digitizer)

HTC Wildfire Take Apart Repair Guide:

- Step one is to remove the back battery cover, battery, and memory card. Once that is done remove the six (6) screws located in the back housing.



Figure 1

- Step two; remove the antenna cover located at the bottom part of the phone.
- Next step is use a safe open pry tool to pry off the back housing and then remove the housing from the phone.



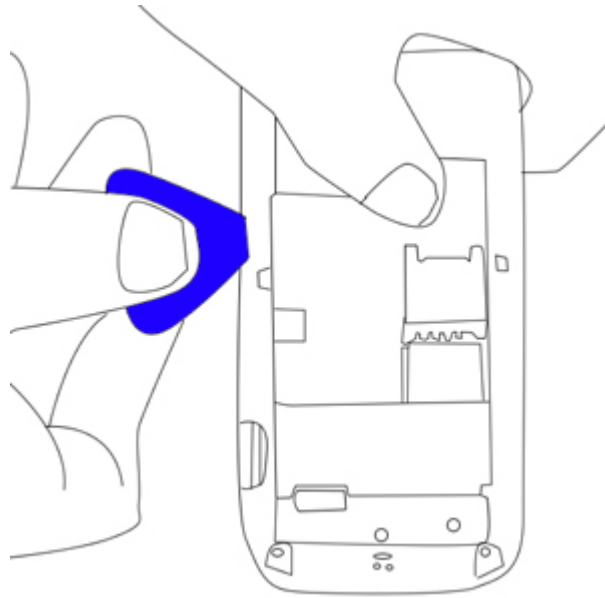


Figure 2

- The back housing is now totally removed and the two (2) screws are now visible. Remove the two (2) screws at the upper left and lower right portion.
- Use the safe pry tool to remove the 3 cables. Remove the motherboard by lifting up using the safe pry tool.
- Remove the flex ribbon cable of the touchscreen digitizer.



Figure 3

- Warm the LCD screen to separate from the touch screen digitizer. Use heat gun or hair dryer to every corner.

- You can now heat the front of the screen assembly to warm the adhesive. Use a heat gun or hair dryer on a medium setting for about 45 seconds, using quick movements around the outside edges.
- Use a safe open pry tool to pry between the touch screen digitizer and front frame, carefully releasing it from the housing. Reheat if necessary.
- Carefully release the touch screen flex cable from the back of the screen assembly and feed it through the housing to fully remove the digitizer.
- You can now replace the touch screen digitizer or LCD.

Your HTC Wildfire is now disassembled and ready for replacement of part(s). Reverse the instructions above to reassemble your Wildfire.

Notice:

Repairs Universe's guides are for **informational purposes only**. Please [click here for details](#).

Learn about [restrictions on reproduction and re-use](#) of Repairs Universe's repair/take-apart/installation guides, and about creating hyperlinks to our guides.

