



SMD Type	COB
Beam Angle	180°
LED Quantity	320 leds/m
CRI	≥90RA
CCT	3000±150K 6500±300K
Lumens/m	1100Lm
PCB color	White
Operating Voltage	DC24V
Power (W)	10W/M
Size (mm)	L 5000* W 8
IP	IP 20/IP 65
Net Weight	0.13kg/roll
Operation Temperature	- 25 ~ 45 °C

When install the led strip,please note the installation technique.The led strip can be bent, but not distorted,as shown below.

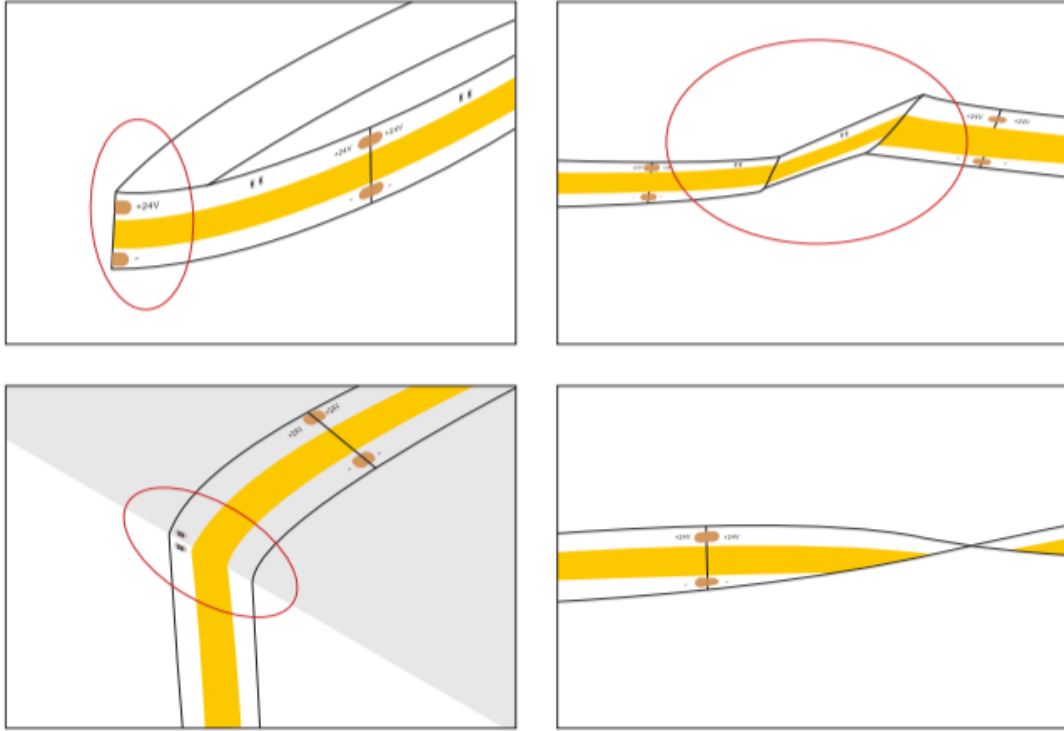

Distortion(Wrong)


- LED strips are low voltage products,you must use the power supply(transformer).Please don,t connect the led strip directly to the AC 110v or AC 220v,otherwise it will burn out the LED strips.

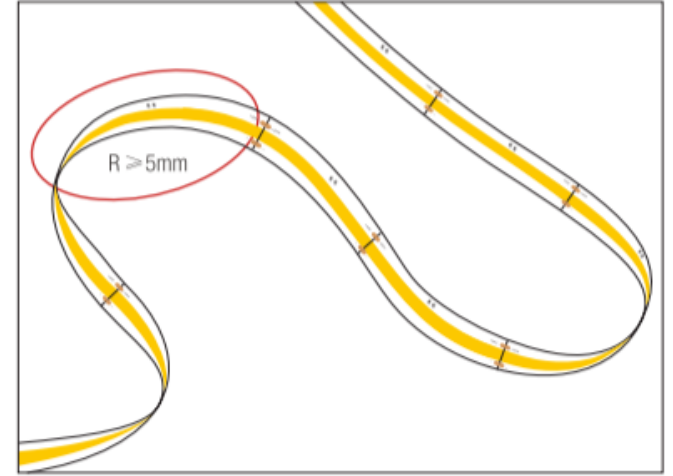

Bend(Right)

- Clean up the installation surface,it will ensure the reliability of the adhesive,The electrical connection process must be operated by a professional person.

COB led strip can be folded in 180 degrees without damaging the light strip. It is very flexible to use.

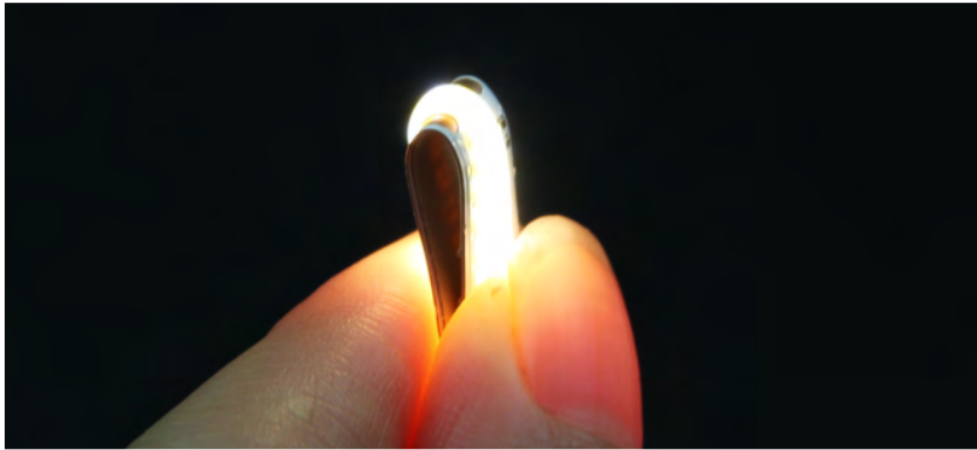


It has better tenacity. can be arbitrary bend




## Light Distribution Curve

15W 3000K

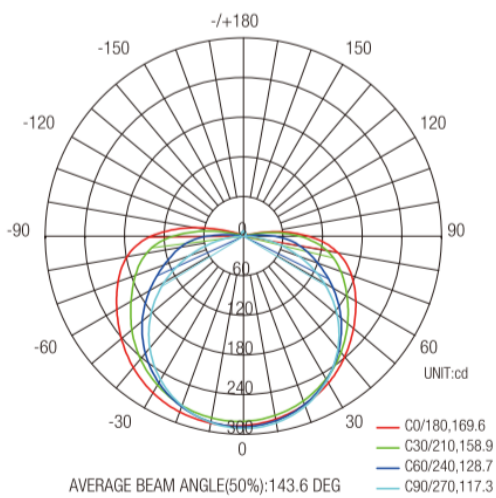

## Lux-Distance Curve

Flux out:713.7 lm

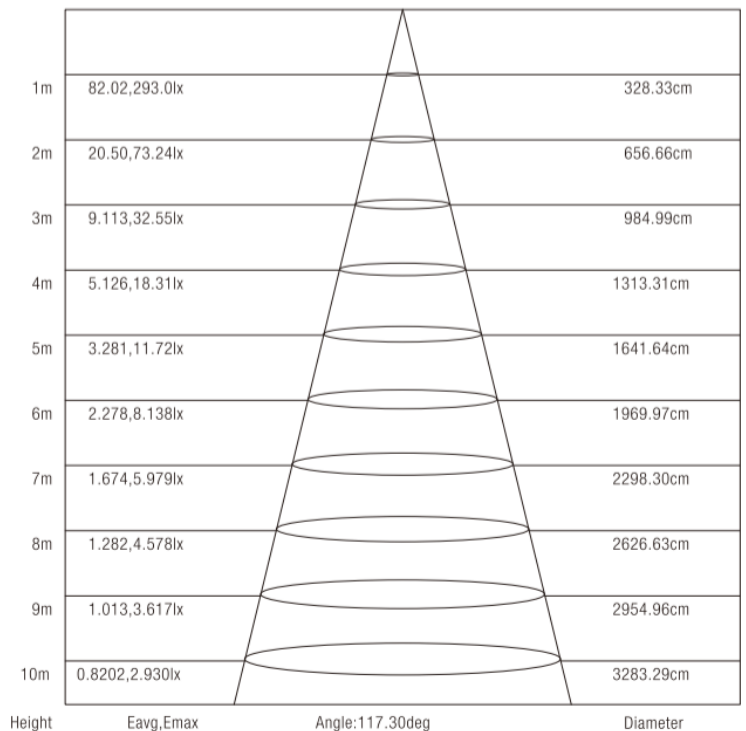

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.