



Voltage	DC12V	DC24V
SMD Type	COB	
Beam Angle	180°	
LED Quantity	480 leds/m	
CRI	≥90RA	
CCT	3000±150K 6500±300K	
Lumens/m	1100Lm	
PCB color	White	
Operating Voltage	DC24V	
Power (W)	10W/M	
Size (mm)	L 5000* W 8	
IP	IP 20/IP 65	
Net Weight	0.13kg/roll	
Operation Temperature	- 25 ~ 45 °C	

When install the led strip,please note the installation technique.The led strip can be bent, but not distorted,as shown below.

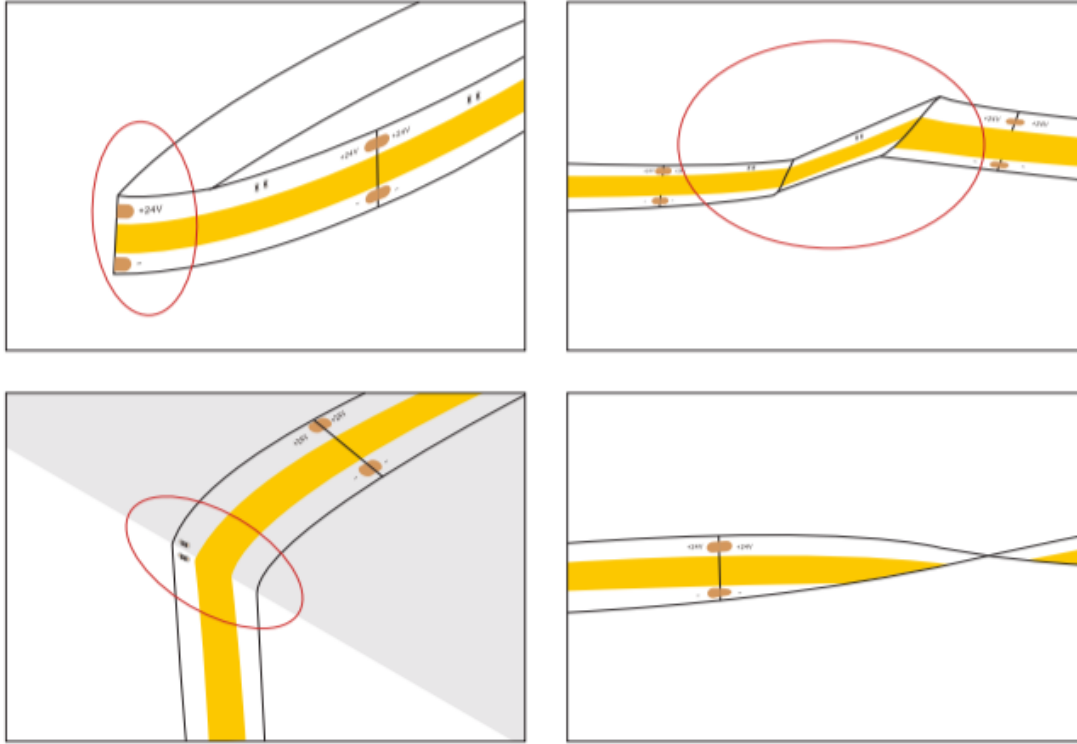

Distortion(Wrong)

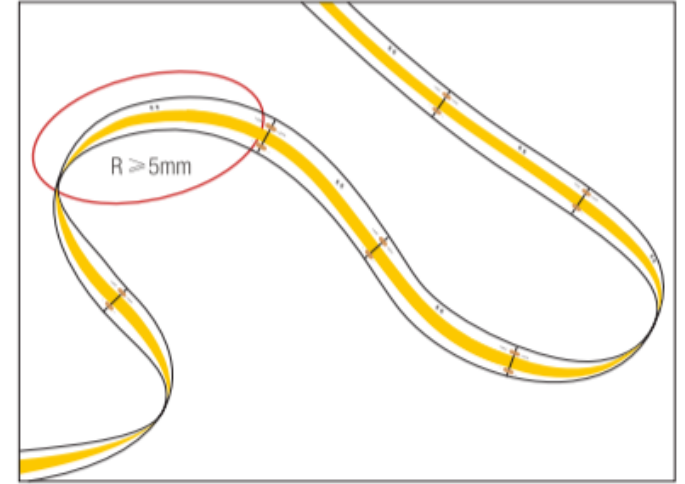


Bend(Right)

- LED strips are low voltage products,you must use the power supply(transformer).Please don,t connect the led strip directly to the AC 110v or AC 220v,otherwise it will burn out the LED strips.

- Clean up the installation surface,it will ensure the reliability of the adhesive,The electrical connection process must be operated by a professional person.

Light Distribution Curve

15W 3000K

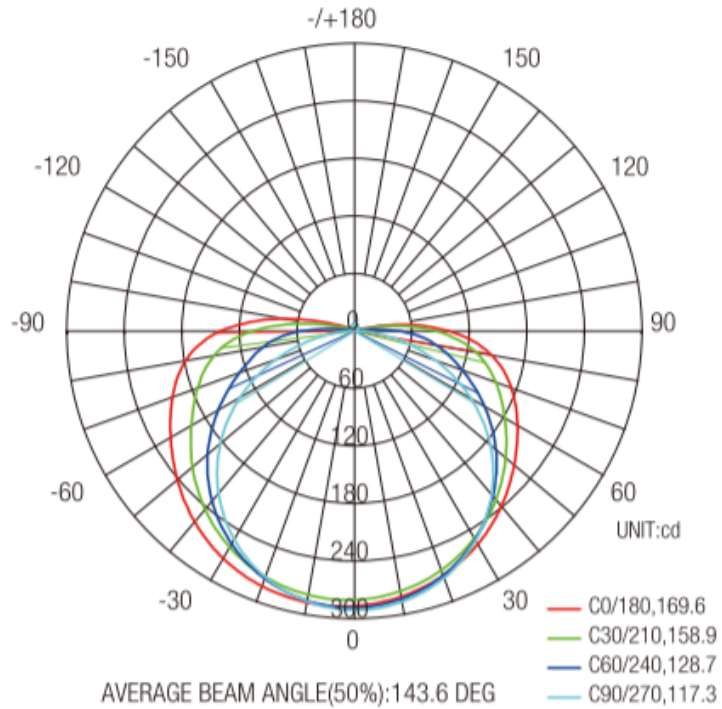

Lux-Distance Curve

Flux out:713.7 lm

