




jointec GAD



JOINTEC GAD aluminum sliding expansion joints are floor profiles structurally designed to bear loads of large scale buildings or building elements. They can be installed in the interstitial space between two sections of a building or between two bays. This technical joint links these interspaces, moving three-dimensionally to accommodate a building's structural and material settlement. The structural bays defined by this profile should be further subdivided with smaller scale movement/expansion joints, chosen according to the expected use and flooring type. For further information, see page 263.



(GAD 700 AN)

INSTALLATION:

- Anchor the side plates with:
 - appropriate screws, 7-3/32" (18cm) on center, on both sides of the profile and
 - two-part epoxy adhesive.

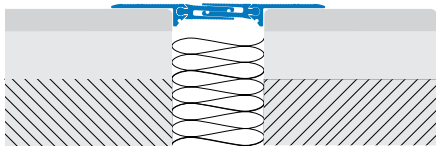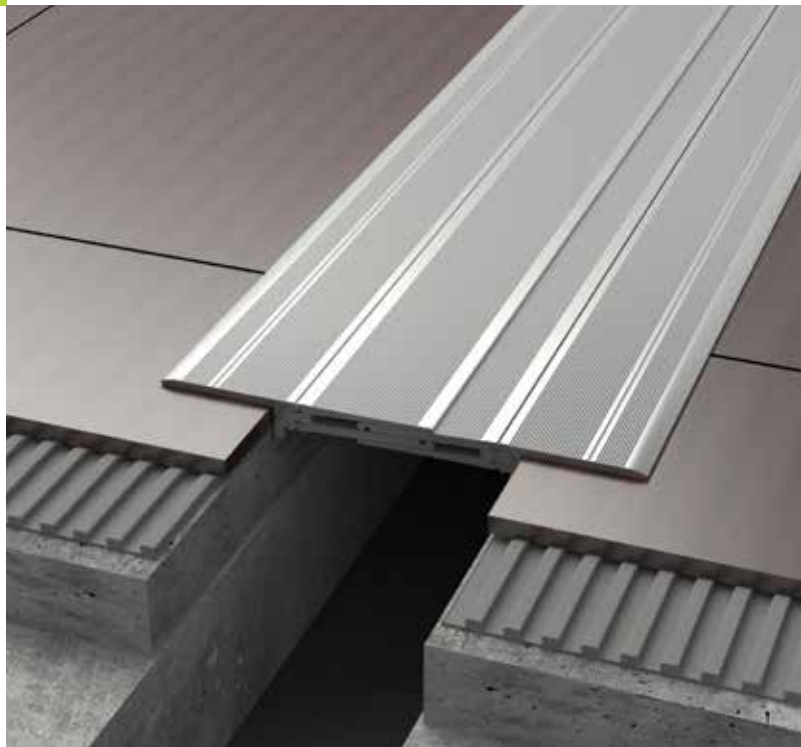

JOINTEC GAD* AN Natural Aluminum

Bridges a 3" - 4-9/64" (75 - 105mm) gap.

This extruded aluminum profile offers good resistance to mechanical stress and wear. Use on floor installations.



	H = in mm		L1 = in mm		Art.		
Material: Aluminum extruded	9/16	15	3	75	GAD	700	AN
	9/16	15	4-9/64	105	GALD	1000	AN
Finish: Natural (AN)							
Length: 13-1/8' (4.00meters)							