



CJ Socket AK Test Socket by Measurement

Date: _____ Date Required: _____ P.O. Number: _____

Ship CJ Sail to: **Friddle's** or **Customer's Address**

Ship To Address: _____


Shipping Method: **GROUND** **NEXT DAY AIR** **2 DAY** **3 DAY**

Customer Name: _____ (Bill to): _____ _____	Patient Name: _____
Contact: _____	Sex: _____
Phone: _____	Height: _____
	Weight: _____
	Age: _____ K Level: 1 2 3 4

MEASURE IN MILLIMETERS, PLEASE

Measurements Taken By: _____

Measurements taken with patient **SITTING** or **STANDING**

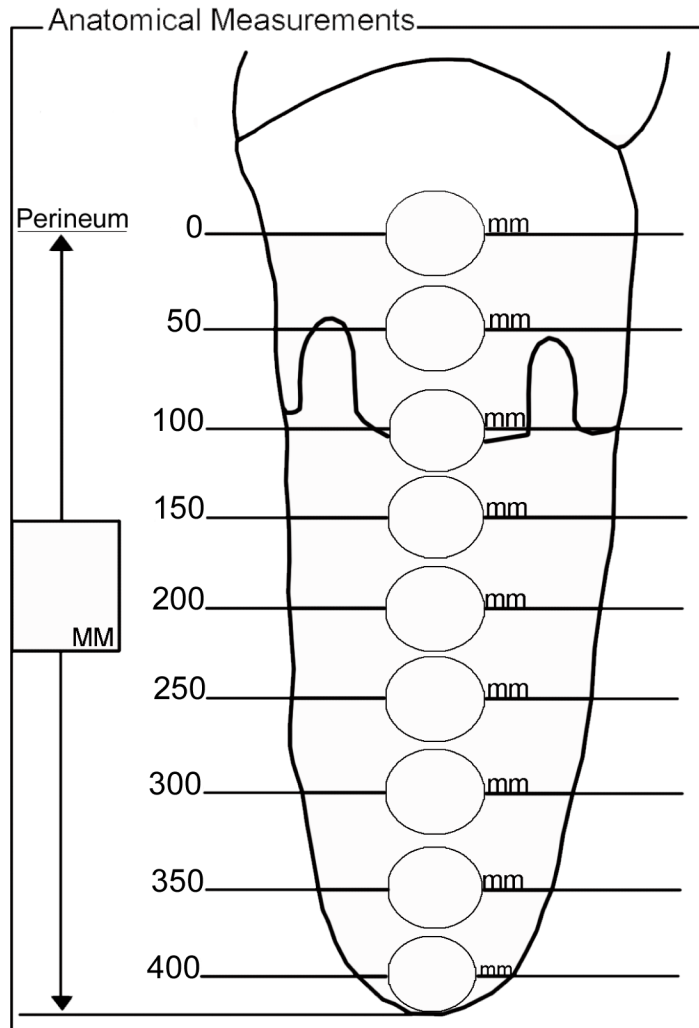

SOCKET OPTIONS

spacing _____ other _____ Side _____
50 mm(Std) / _____ **LEFT** or **RIGHT**

Reduction % _____

<input type="checkbox"/> Round	<input type="checkbox"/> Conical	<input type="checkbox"/> Flat
--------------------------------	----------------------------------	-------------------------------

- Carving Only
- Test Socket Only
- Test Socket & Carving
PETG or Orfitrans Stiff
- Dummy
 - Kiss } Supply Lock
 - Bulldog } Y or N
 - 4SN1 }
- None
- Attachment
 - 4 Hole Plate
 - 3 Prong (M or F)
- None



CJ Socket AK Test Socket by Measurement

CJ Sail Options

Patient Name / Reference Number: _____

LEFT

RIGHT

Internal use only

Serial # _____

Date in _____

Date Out _____

TFB _____


Material Color: Black Coyote (Brown) Heavy Duty Fabric (Black Only)

Closure Options: Standard (1:1) Closure, 1.5" Velcro Attached to Batten
 (2:1) Closure, 1.5" Loops Attached to Batten. (*Customer supplies Velcro Straps*)
 (2:1) Closure, 1" Loops Attached to Batten, 1" Pressure Buckles with Dacron Strap (No Velcro)

Other Options: Proximal Arc (for very Conical or Flexed Residual Limbs, Degrees of Socket Flexion _____ (Required))
 Darts Sewn into Sail (for Irregular Shaped Residual Limbs) Dart Measurements (**H" x W"**): _____
 OPEN FLAP Design - Medial Side of Sail Will Not Have Attachment Holes - Friddle's to Add 1" Hook Velcro Inside Socket
 CJ Socket to Make Dacron-Backed Velcro Straps

Special Instructions: _____

For Internal Use Only - Friddle's to Provide Sail Measurements to CJ Socket

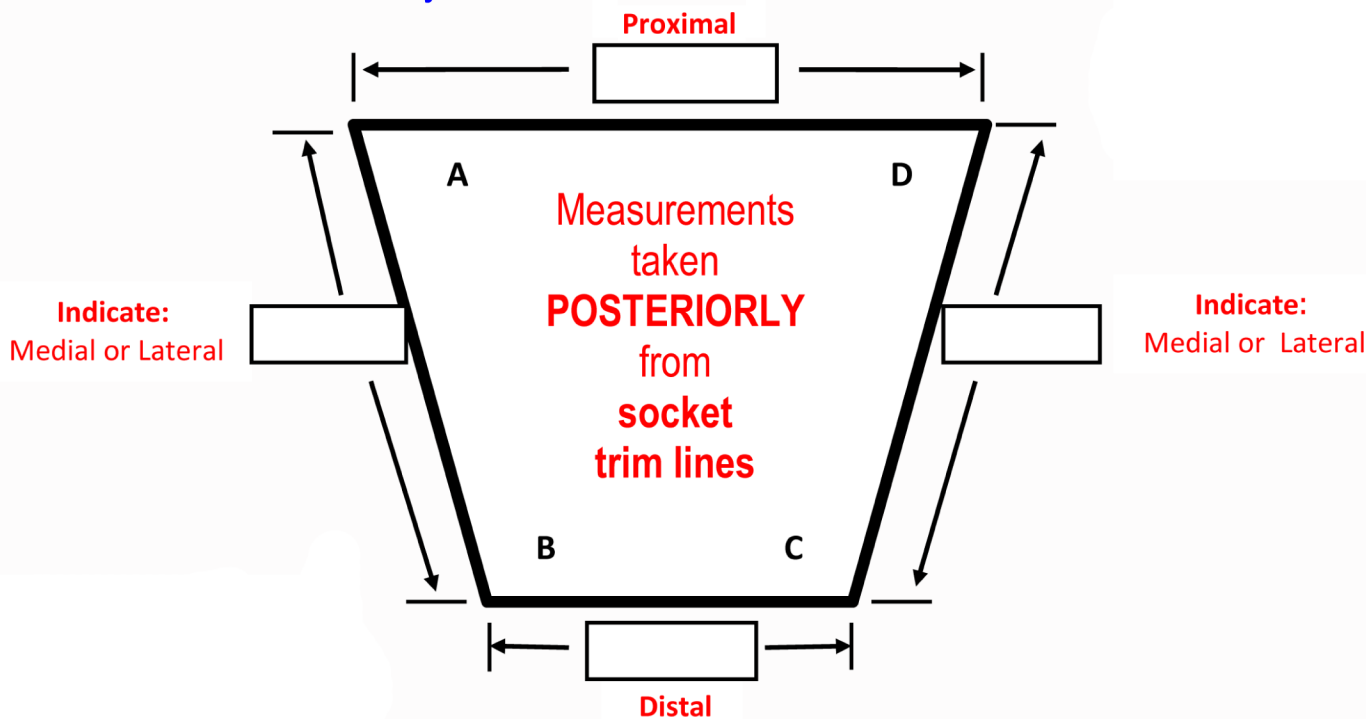

Email or Fax completed form to c-fab@friddles.com or 864.369.1149